


DR10HRA Performance Curve

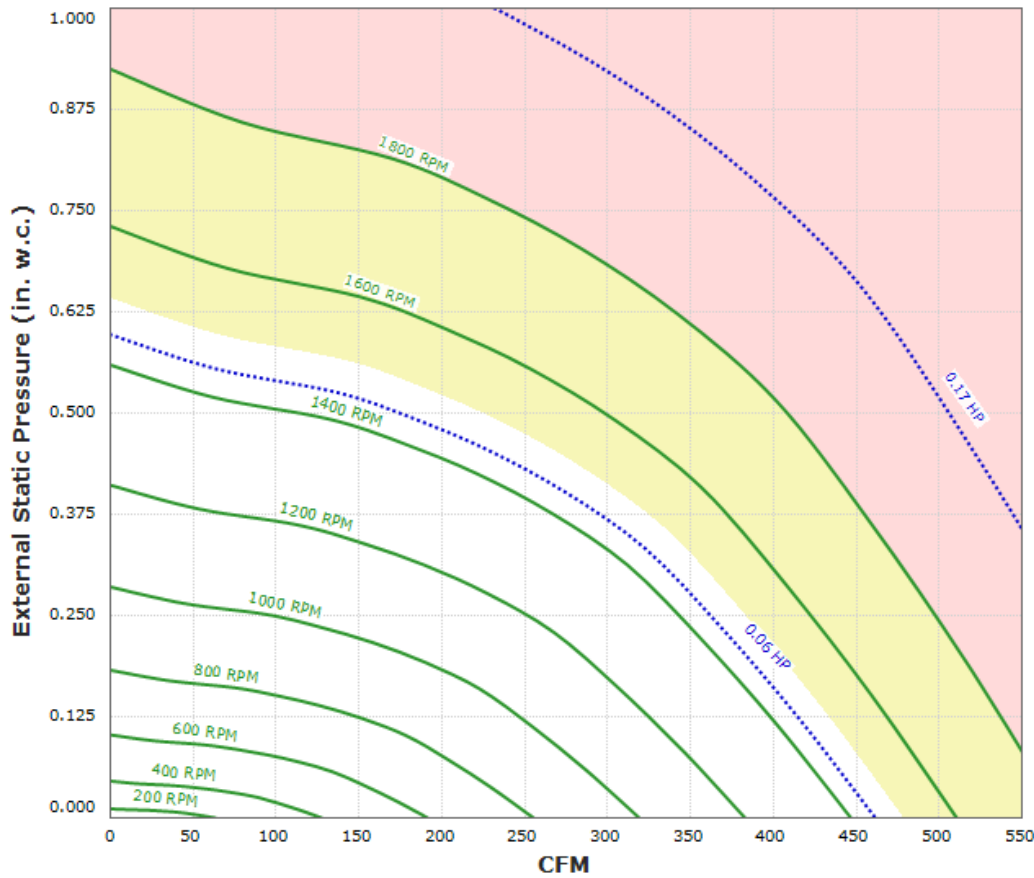

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

Motor BMN42-12011-50-115 has an rpm range of 350 to 1800.
 Motor BMN42-12011-60-115 has an rpm range of 350 to 1800.
 Motor BMN42-12012-50-230/277 has an rpm range of 350 to 1800.
 Motor BMN42-12012-60-230/277 has an rpm range of 350 to 1800.
 Motor M47PWAAE-ECM-50-115 has an rpm range of 350 to 1800.
 Motor M47PWAAE-ECM-60-115 has an rpm range of 350 to 1800.
 Motor S33C452VC-01-50-115 has an rpm range of 800 to 1400.
 Motor S33C452VC-01-50-230 has an rpm range of 800 to 1400.
 Motor S33C452VC-01-60-115 has an rpm range of 800 to 1650.
 Motor S33C452VC-01-60-230 has an rpm range of 800 to 1650.
 Motor S33C452VC-02-50-115 has an rpm range of 800 to 1300.
 Motor S33C452VC-02-50-230 has an rpm range of 800 to 1300.
 Motor S33C452VC-02-60-115 has an rpm range of 800 to 1550.
 Motor S33C452VC-02-60-230 has an rpm range of 800 to 1550.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Speed shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

RuppAir certifies that Model DR10HRA is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and 311 and comply with the requirements of the AMCA Certified Ratings Program. Tested to AMCA Standards 210 and 300. Meets California Energy Commission (CEC) Title 20 Regulations.

Catalog #110R
 November 2024

