


DR10HRA Performance Curve

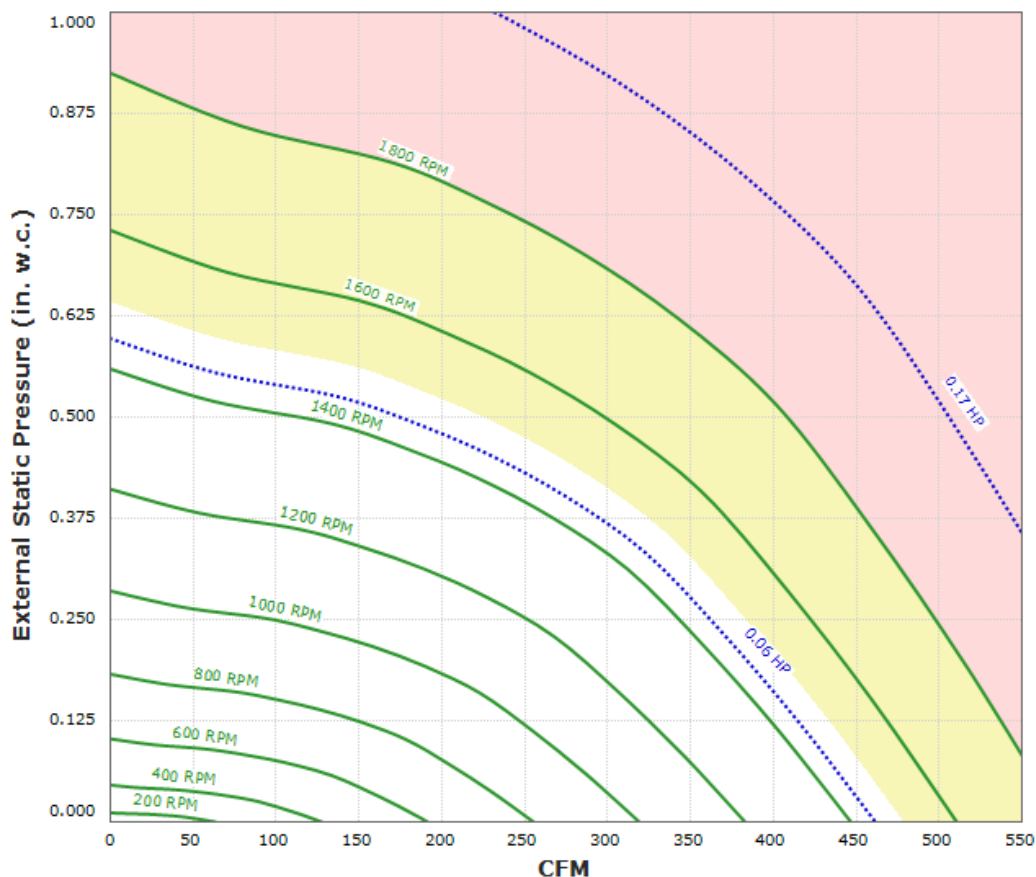

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

- Motor BMN42-12011-50-115 has an rpm range of 350 to 1800.
- Motor BMN42-12011-60-115 has an rpm range of 350 to 1800.
- Motor BMN42-12012-50-230/277 has an rpm range of 350 to 1800.
- Motor BMN42-12012-60-230/277 has an rpm range of 350 to 1800.
- Motor M47PWAAE-ECM-50-115 has an rpm range of 350 to 1800.
- Motor M47PWAAE-ECM-60-115 has an rpm range of 350 to 1800.
- Motor S33C452VC-01-50-115 has an rpm range of 800 to 1400.
- Motor S33C452VC-01-50-230 has an rpm range of 800 to 1400.
- Motor S33C452VC-01-60-115 has an rpm range of 800 to 1650.
- Motor S33C452VC-01-60-230 has an rpm range of 800 to 1650.
- Motor S33C452VC-02-50-115 has an rpm range of 800 to 1300.
- Motor S33C452VC-02-50-230 has an rpm range of 800 to 1300.
- Motor S33C452VC-02-60-115 has an rpm range of 800 to 1550.
- Motor S33C452VC-02-60-230 has an rpm range of 800 to 1550.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Speed shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

Catalog #113R
October 2019