


DR12HRA Performance Curve

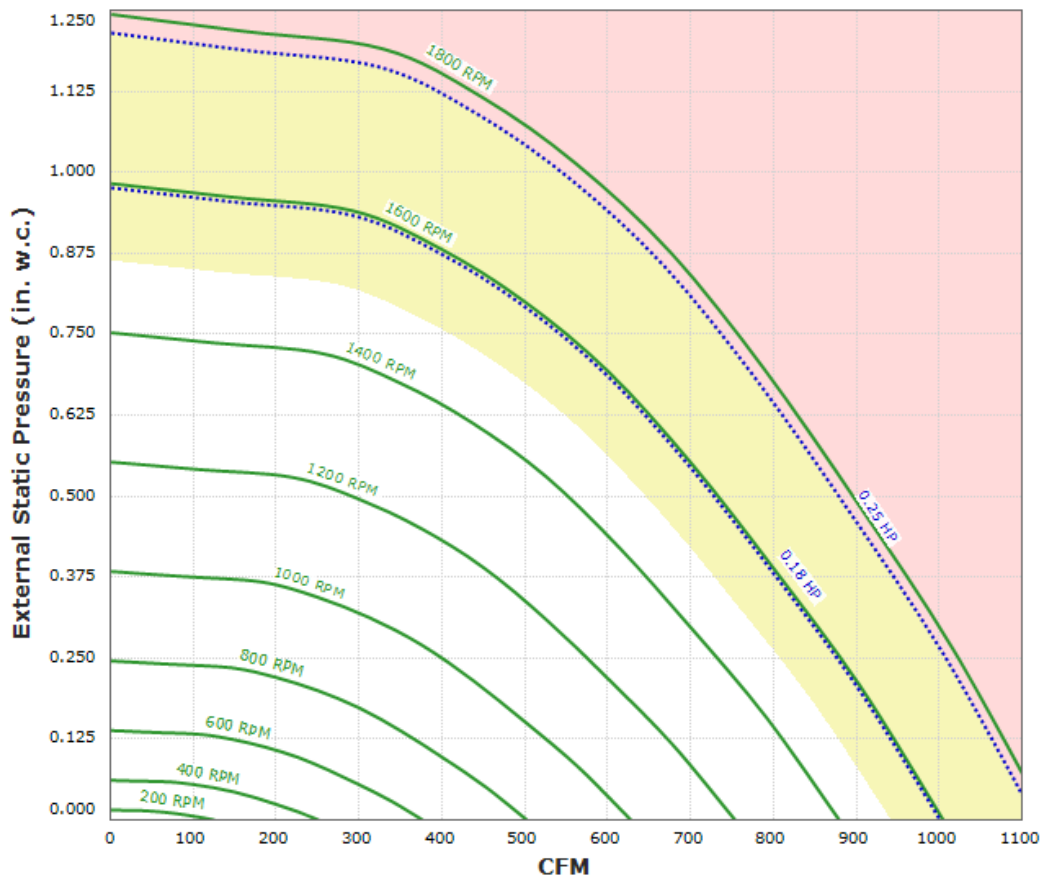

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

Motor BMN42-18011-50-115 has an rpm range of 350 to 1800.
 Motor BMN42-18011-60-115 has an rpm range of 350 to 1800.
 Motor BMN42-18012-50-230/277 has an rpm range of 350 to 1800.
 Motor BMN42-18012-60-230/277 has an rpm range of 350 to 1800.
 Motor CK42BS04M01-50-115 has an rpm range of 1100 to 1400.
 Motor CK42BS04M01-50-230 has an rpm range of 1100 to 1400.
 Motor CK42BS04M01-60-115 has an rpm range of 1125 to 1620.
 Motor CK42BS04M01-60-230 has an rpm range of 1125 to 1620.
 Motor CK42BS04M02-50-115 has an rpm range of 1240 to 1400.
 Motor CK42BS04M02-50-230 has an rpm range of 1100 to 1400.
 Motor CK42BS04M02-60-115 has an rpm range of 1250 to 1625.
 Motor CK42BS04M02-60-230 has an rpm range of 1130 to 1625.
 Motor M47PWAAD-ECM-50-115 has an rpm range of 350 to 1800.
 Motor M47PWAAD-ECM-60-115 has an rpm range of 350 to 1800.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Speed shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

RuppAir certifies that Model DR12HRA is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and 311 and comply with the requirements of the AMCA Certified Ratings Program. Tested to AMCA Standards 210 and 300. Meets California Energy Commission (CEC) Title 20 Regulations.

Catalog #110R
 November 2024

