


DR85HRA Performance Curve

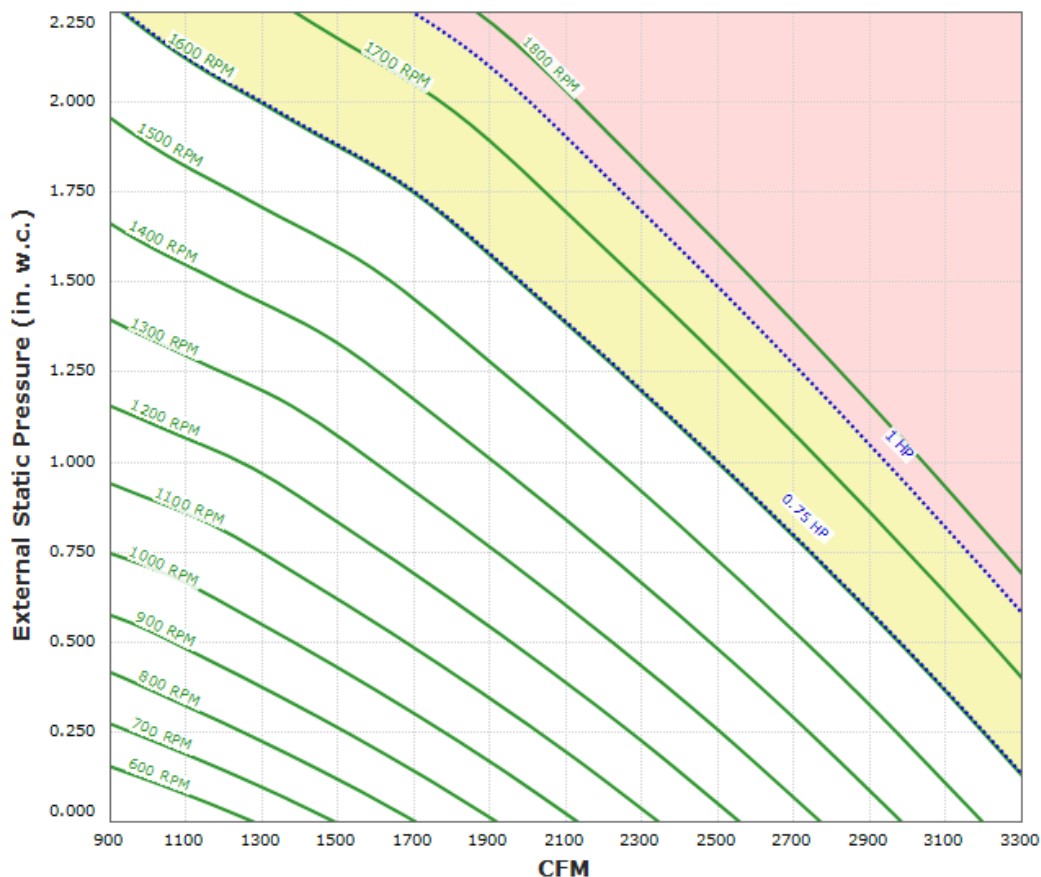

Max Sizeable RPM = 1900 RPM. Curve shown extended beyond this point for reference only.

- Motor BMN48-56011-50-115 has an rpm range of 300 to 1800.
- Motor BMN48-56011-60-115 has an rpm range of 300 to 1800.
- Motor BMN48-56012-50-230/277 has an rpm range of 300 to 1800.
- Motor BMN48-56012-60-230/277 has an rpm range of 300 to 1800.
- Motor BMN48-75011-E-50-115 has an rpm range of 300 to 1800.
- Motor BMN48-75011-E-60-115 has an rpm range of 300 to 1800.
- Motor BMN48-75012-E-50-230/277 has an rpm range of 300 to 1800.
- Motor BMN48-75012-E-60-230/277 has an rpm range of 300 to 1800.
- Motor CK48BS15FF01-60 has an rpm range of 431 to 1725.
- Motor CK48BS21FF01-60 has an rpm range of 431 to 1400.
- Motor CK48HF15FF01-50-115 has an rpm range of 1075 to 1360.
- Motor CK48HF15FF01-50-230 has an rpm range of 1075 to 1400.
- Motor CK48HF15FF01-60-115 has an rpm range of 1075 to 1625.
- Motor CK48HF15FF01-60-230 has an rpm range of 1075 to 1625.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Speed shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).