


RA-SIF10DD Performance Curve

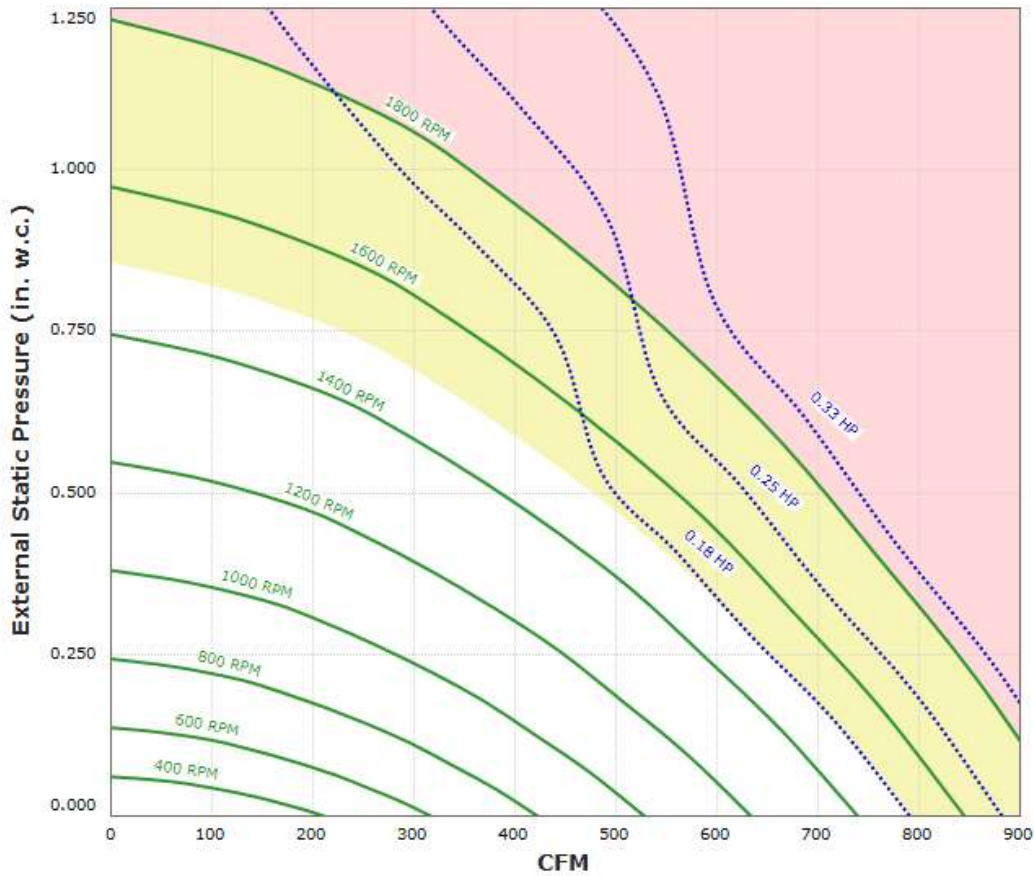

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

Motor BMN42-18011-60-115 has an rpm range of 300 to 1800.

Motor BMN42-18012-50-230/277 has an rpm range of 300 to 1800.

Motor BMN42-18012-60-230/277 has an rpm range of 300 to 1800.

Motor BMN48-25011-50-115 has an rpm range of 300 to 1800.

Motor CK42BS04M01-50-115 has an rpm range of 1100 to 1400.

Motor CK42BS04M01-50-230 has an rpm range of 1100 to 1400.

Motor CK42BS04M01-60-115 has an rpm range of 1125 to 1620.

Motor CK42BS04M01-60-230 has an rpm range of 1125 to 1620.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R

May 2021