


RA-SIF13DD-SS Performance Curve

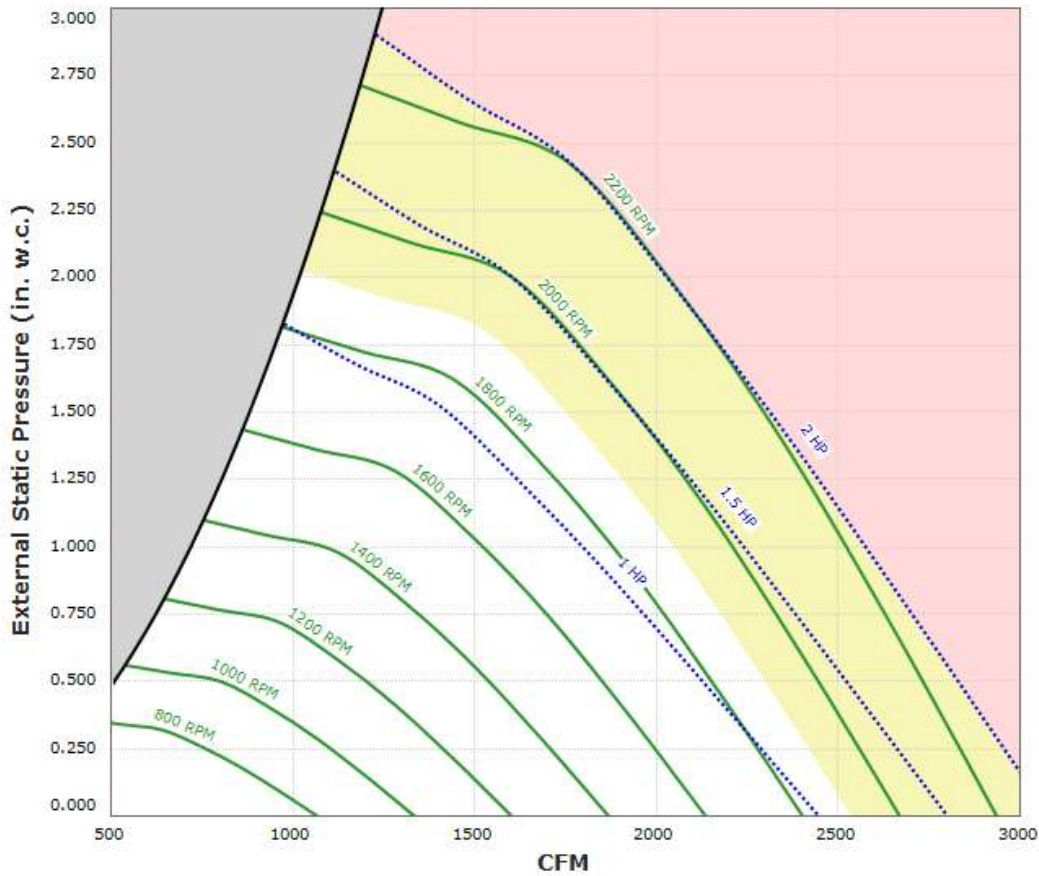

Max Sizeable RPM = 2300 RPM. Curve shown extended beyond this point for reference only.

Motor BMN48-75011-E-50-115 has an rpm range of 800 to 1800.

Motor BMN48-75011-E-60-115 has an rpm range of 800 to 1800.

Motor BMN48-75012-E-50-230/277 has an rpm range of 800 to 1800.

Motor BMN48-75012-E-60-230/277 has an rpm range of 800 to 1800.

Motor GP0014 has an rpm range of 800 to 1800.

Motor GP0014-50 has an rpm range of 800 to 1440.

Motor GP0022 has an rpm range of 900 to 2300.

Motor GP1/54 has an rpm range of 800 to 1800.

Motor GP1/54-50 has an rpm range of 800 to 1440.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R

May 2021