


RA-SIF13DD-SS Performance Curve

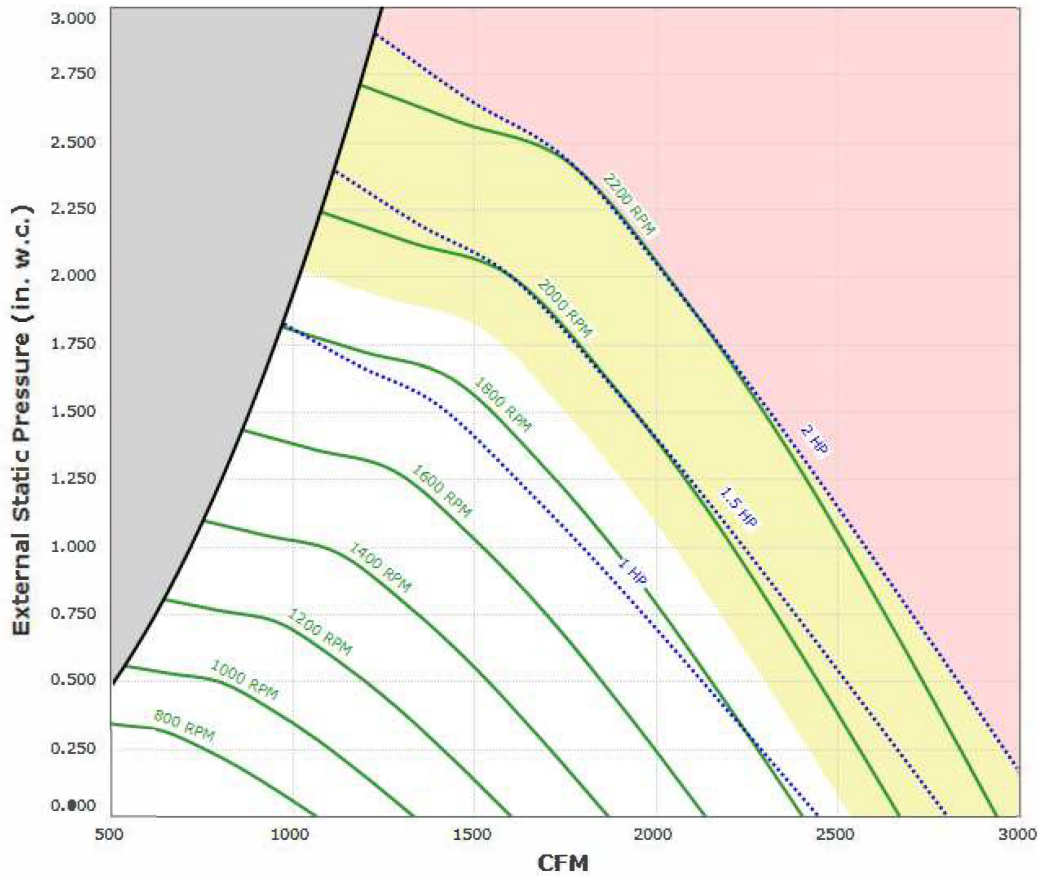

Max Sizeable RPM = 2300 RPM. Curve shown extended beyond this point for reference only.

Motor BMN48-750I1-E-50-115 has an rpm range of 800 to 1800.

Motor BMN48-750I1-E-60-115 has an rpm range of 800 to 1800.

Motor BMN48-750I2-E-50-230/277 has an rpm range of 800 to 1800.

Motor BMN48-750I2-E-60-230/277 has an rpm range of 800 to 1800.

Motor GP0014 has an rpm range of 800 to 1800.

Motor GP0014-50 has an rpm range of 800 to 1440.

Motor GP0022 has an rpm range of 900 to 2300.

Motor GP1/54 has an rpm range of 800 to 1800.

Motor GP1/54-50 has an rpm range of 800 to 1440.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

RuppAir certifies that Model RA-SIF13DD-SS shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Rating Program. Tested to AMCA Standards 210 and 300. Meets California Energy Commission (CEC) Title 20 Regulations.

Catalog #110R
November 2024

