


RA-SIF13DD Performance Curve

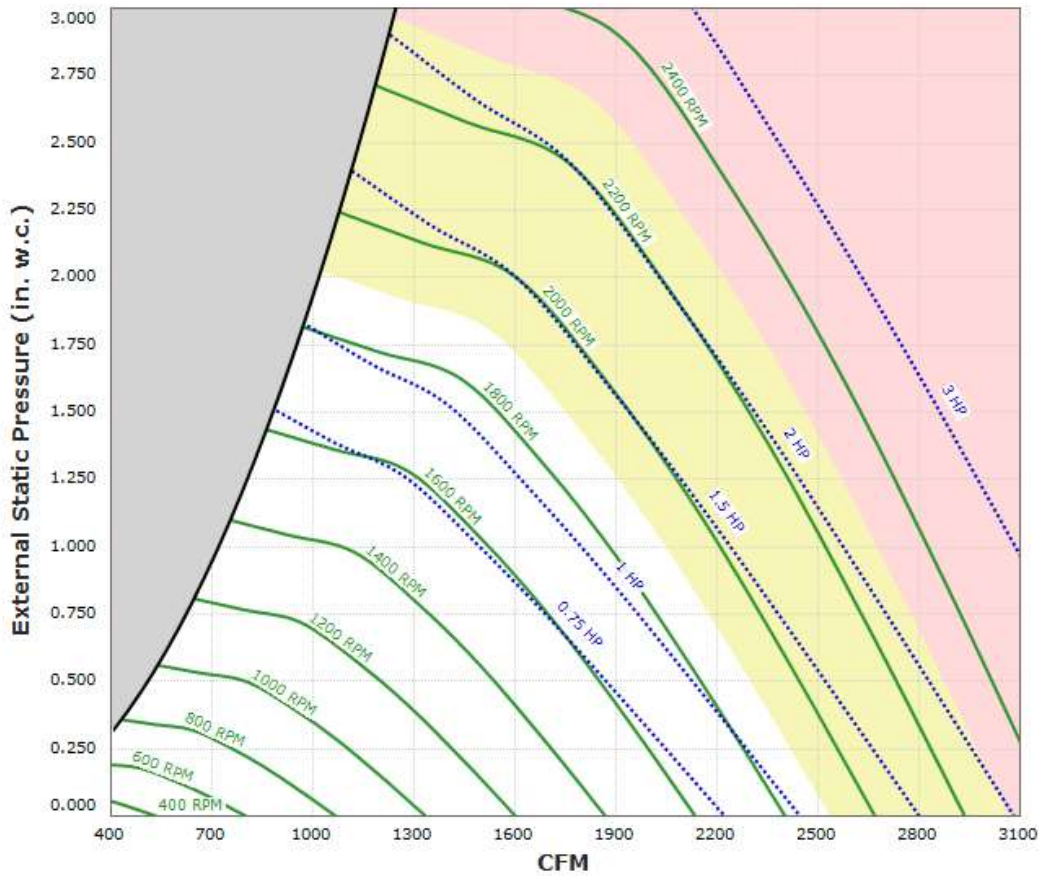

Max Sizeable RPM = 2300 RPM. Curve shown extended beyond this point for reference only.

- Motor 00158OT3H145T-S has an rpm range of 800 to 1750.
- Motor BMN48-560I1-50-115 has an rpm range of 800 to 1800.
- Motor BMN48-560I1-60-115 has an rpm range of 800 to 1800.
- Motor BMN48-750I1-E-50-115 has an rpm range of 800 to 1800.
- Motor BMN48-750I1-E-60-115 has an rpm range of 800 to 1800.
- Motor BMN48-750I2-E-50-230/277 has an rpm range of 800 to 1800.
- Motor BMN48-750I2-E-60-230/277 has an rpm range of 800 to 1800.
- Motor DTP0014 has an rpm range of 800 to 1750.
- Motor DTP0014-50HZ has an rpm range of 800 to 1429.
- Motor DTP0022 has an rpm range of 900 to 2300.
- Motor DTP0022-50 has an rpm range of 900 to 2300.
- Motor DTP0032 has an rpm range of 900 to 2300.
- Motor DTP1/54 has an rpm range of 800 to 1750.
- Motor DTP1/54-50HZ has an rpm range of 800 to 1426.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R
May 2021