


## RA-SIF15DD-SS Performance Curve

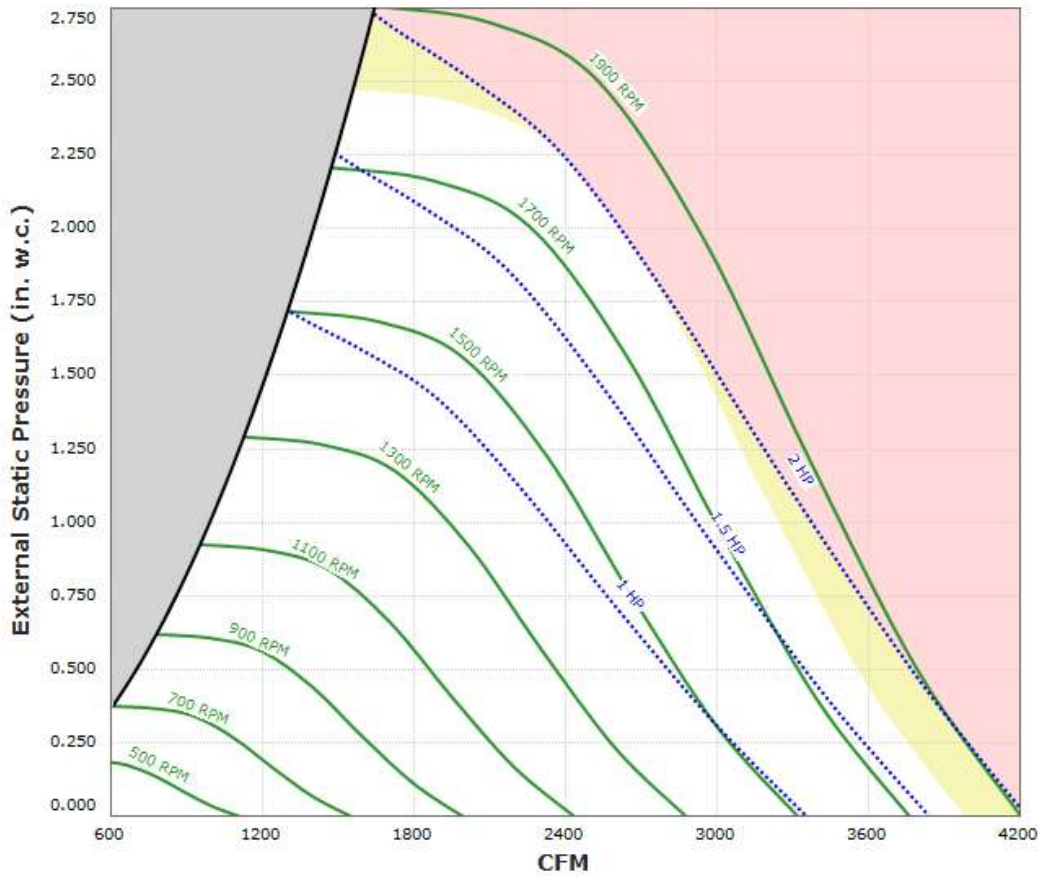

**Max Sizeable RPM = 2200 RPM. Curve shown extended beyond this point for reference only.**

Motor BMN48-750I1-50-115 has an rpm range of 400 to 1800.

Motor BMN48-750I1-60-115 has an rpm range of 400 to 1800.

Motor BMN48-750I2-50-230/277 has an rpm range of 400 to 1800.

Motor BMN48-750I2-60-230/277 has an rpm range of 400 to 1800.

Motor GP0014 has an rpm range of 450 to 1800.

Motor GP0014-50 has an rpm range of 400 to 1440.

Motor GP0022 has an rpm range of 900 to 2200.

Motor GP0024 has an rpm range of 450 to 1740.

Motor GP1/54 has an rpm range of 450 to 1800.

Motor GP1/54-50 has an rpm range of 400 to 1440.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R

May 2021