


RA-SIF15DD Performance Curve

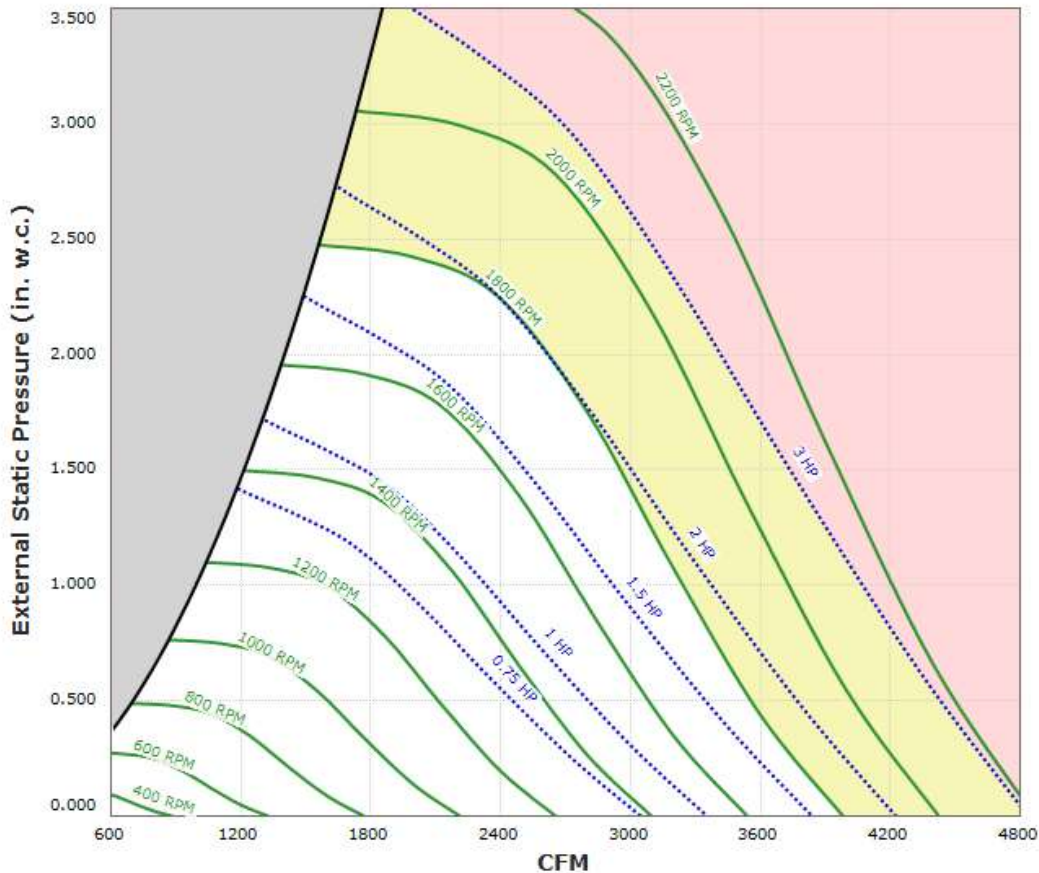

Max Sizeable RPM = 2200 RPM. Curve shown extended beyond this point for reference only.

- Motor 001180T3H143T-S has an rpm range of 440 to 1750.
- Motor BMN48-56011-50-115 has an rpm range of 400 to 1800.
- Motor BMN48-56011-60-115 has an rpm range of 400 to 1800.
- Motor BMN48-56012-50-230/277 has an rpm range of 400 to 1800.
- Motor BMN48-56012-60-230/277 has an rpm range of 400 to 1800.
- Motor BMN48-75011-E-60-115 has an rpm range of 400 to 1800.
- Motor BMN48-75012-E-60-230/277 has an rpm range of 400 to 1800.
- Motor CK48HF15FF01-50-115 has an rpm range of 1075 to 1360.
- Motor CK48HF15FF01-50-230 has an rpm range of 1075 to 1400.
- Motor CK48HF15FF01-60-115 has an rpm range of 1075 to 1625.
- Motor CK48HF15FF01-60-230 has an rpm range of 1075 to 1625.
- Motor DTP0014 has an rpm range of 437 to 1750.
- Motor DTP0014-50HZ has an rpm range of 400 to 1429.
- Motor DTP0022 has an rpm range of 900 to 2200.
- Motor DTP0022-50 has an rpm range of 900 to 2200.
- Motor DTP0024 has an rpm range of 435 to 1740.
- Motor DTP0032 has an rpm range of 900 to 2200.
- Motor DTP1/54 has an rpm range of 437 to 1750.
- Motor DTP1/54-50HZ has an rpm range of 400 to 1426.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R
May 2021