


RA-SIF9DD Performance Curve

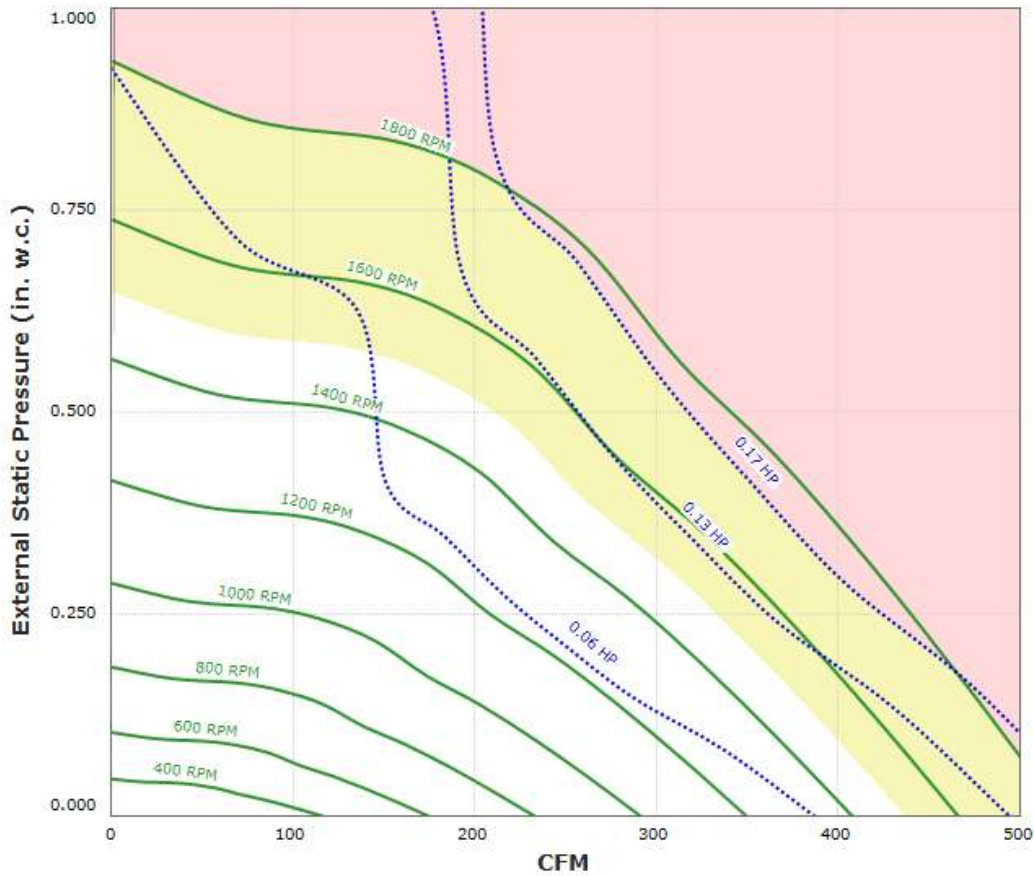

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

Motor BMN42-12011-50-115 has an rpm range of 300 to 1800.

Motor BMN42-12011-60-115 has an rpm range of 300 to 1800.

Motor BMN42-12012-50-230/277 has an rpm range of 300 to 1800.

Motor BMN42-12012-60-230/277 has an rpm range of 300 to 1800.

Motor M47PWAAE-ECM-50-115 has an rpm range of 350 to 1800.

Motor M47PWAAE-ECM-60-115 has an rpm range of 350 to 1800.

Motor S33C452VC-01-50-115 has an rpm range of 800 to 1400.

Motor S33C452VC-01-50-230 has an rpm range of 800 to 1400.

Motor S33C452VC-01-60-115 has an rpm range of 800 to 1650.

Motor S33C452VC-01-60-230 has an rpm range of 800 to 1650.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream. Power rating (BHP) includes transmission losses.

Catalog #110R

May 2021