
RABI18DD-RM Performance Curve

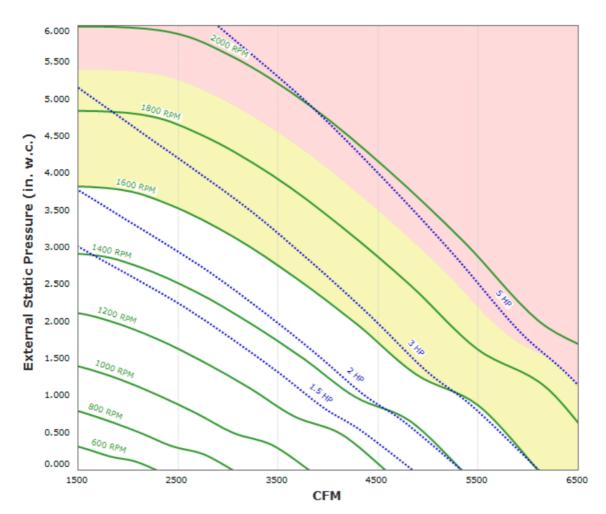

Max Sizeable RPM = 1900 RPM. Curve shown extended beyond this point for reference only. Max discharge velocity for restaurant applications is 1800 fpm. This equates to 3512 cfm. Motor 00152ET3H182T-W22 has an rpm range of 600 to 1150. Motor 00212ET3E184T-W22 has an rpm range of 600 to 1150. Motor 00212ET3H184T-W22 has an rpm range of 600 to 1150. Motor 002120T3H184T-S has an rpm range of 600 to 1150. Motor 00218ET3H145T-W22 has an rpm range of 600 to 1750. Motor 002180T3H145T-S has an rpm range of 600 to 1750. Motor 00318ET3H182T-W22 has an rpm range of 600 to 1750. Motor 003180T3H182T-S has an rpm range of 600 to 1750. Motor 00518ET3H184T-W22 has an rpm range of 600 to 1750. Motor 005180T3H184T-S has an rpm range of 600 to 1750. Motor BMN145-2.012-CS-UB1-50 (1200RPM) has an rpm range of 600 to 1200. Motor BMN145-2.0I2-CS-UB1-60 (1200RPM) has an rpm range of 600 to 1200. Motor BMN145-2.0I2-ES-UB1-50 (1800RPM) has an rpm range of 600 to 1800. Motor BMN145-2.0I2-ES-UB1-60 (1800RPM) has an rpm range of 600 to 1800. Motor DHP0026 has an rpm range of 600 to 1150. Motor DHP0034 has an rpm range of 600 to 1750. Motor DTP0024 has an rpm range of 600 to 1740. Motor DTP0024-50HZ has an rpm range of 600 to 1415. Motor DTP0026 has an rpm range of 600 to 1150. Motor DTP0034 has an rpm range of 600 to 1755. Motor DTP0034-50HZ has an rpm range of 600 to 1438. Motor DTP0054 has an rpm range of 600 to 1750. Motor DTP0054-50 has an rpm range of 600 to 1435. Motor DTP1/56 has an rpm range of 600 to 1150. Motor GP0024 has an rpm range of 600 to 1740. Motor GP0024-50 has an rpm range of 600 to 1440. Motor GP0026 has an rpm range of 600 to 1150. Motor GP0034 has an rpm range of 600 to 1800. Motor GP0034-50 has an rpm range of 600 to 1440. Motor GP0054 has an rpm range of 600 to 1800. Motor GP0054-50 has an rpm range of 600 to 1440. Motor GP1/56 has an rpm range of 600 to 1150. Motor NP0024 has an rpm range of 600 to 1740. Motor NP0026 has an rpm range of 600 to 1150. Motor NP0034 has an rpm range of 600 to 1755.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

RuppAir certifies that Model RABI18DD-RM shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Rating Program. Tested to AMCA Standards 210 and 300. Meets California Energy Commission (CEC) Title 20 Regulations.

Catalog #110R November 2024

