


## RAB124BDHP-RM Performance Curve

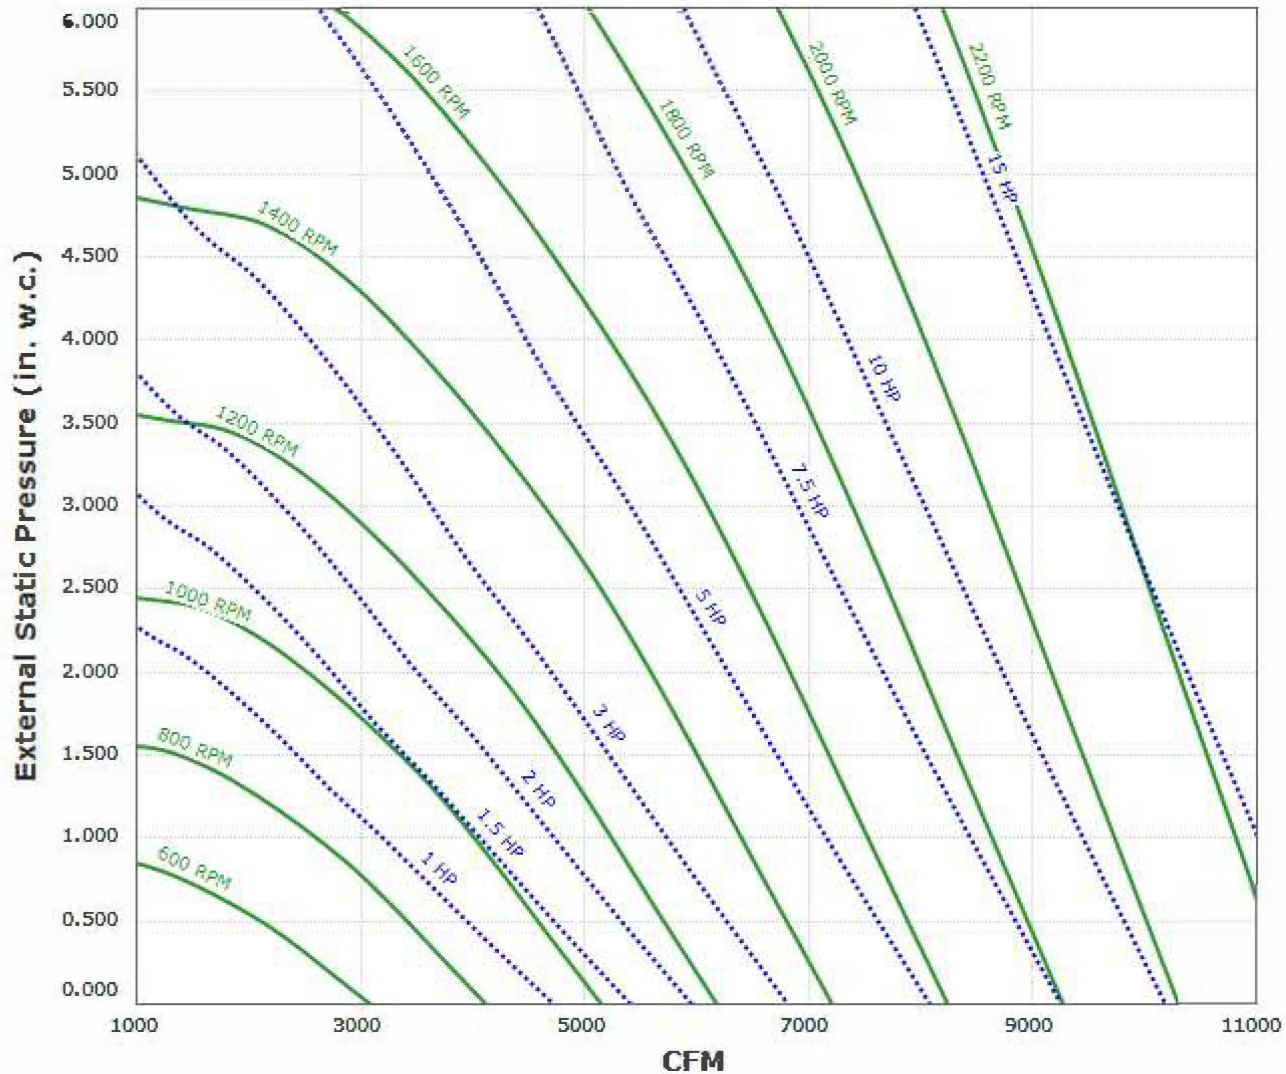

**Max Sizeable RPM = 1600 RPM. Curve shown extended beyond this point for reference only.**

**Max discharge velocity for restaurant applications is 1800 fpm. This equates to 6297 cfm.**

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

RuppAir certifies that Model RAB124BDHP-RM shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Rating Program. Tested to AMCA Standards 210 and 300. Meets California Energy Commission (CEC) Title 20 Regulations.

Catalog #110R  
November 2024

