


RA-RE1100DD Performance Curve

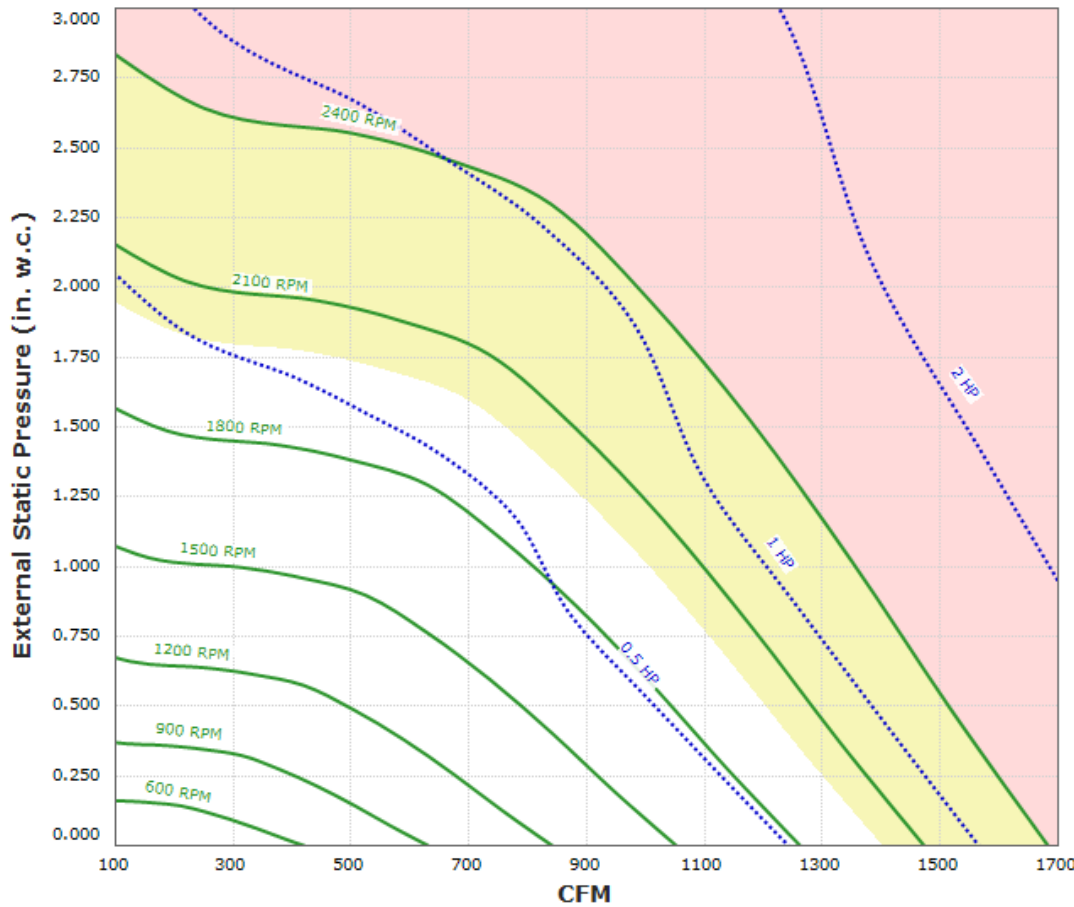

Max Sizeable RPM = 2400 RPM. Curve shown extended beyond this point for reference only.

Max discharge velocity for restaurant applications is 1800 fpm. This equates to 1725 cfm.

Motor 00118ET3H143T-W22 has an rpm range of 600 to 1750.

Motor 00118OT3E56-S48PP has an rpm range of 600 to 1720.

Motor 00118OT3E56-S48PP-50HZ has an rpm range of 600 to 1425.

Motor 00118OT3H143T-S has an rpm range of 600 to 1750.

Motor 00236ET3H145T-W22 has an rpm range of 900 to 2400.

Motor 00236OT3H145T-S has an rpm range of 900 to 2400.

Motor BMN48-375I1-50-115 has an rpm range of 600 to 1800.

Motor BMN48-375I1-60-115 has an rpm range of 600 to 1800.

Motor BMN48-375I2-50-230/277 has an rpm range of 600 to 1800.

Motor BMN48-375I2-60-230/277 has an rpm range of 600 to 1800.

Motor DTP0014 has an rpm range of 600 to 1750.

Motor DTP0014-50HZ has an rpm range of 600 to 1429.

Motor DTP0022 has an rpm range of 900 to 2400.

Motor DTP0022-50 has an rpm range of 900 to 2400.

Motor GP0014 has an rpm range of 600 to 1800.

Motor GP0014-50 has an rpm range of 600 to 1440.

Motor GP0022 has an rpm range of 900 to 2400.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

Catalog #112R

August 2020