


RA-RE1800DD Performance Curve

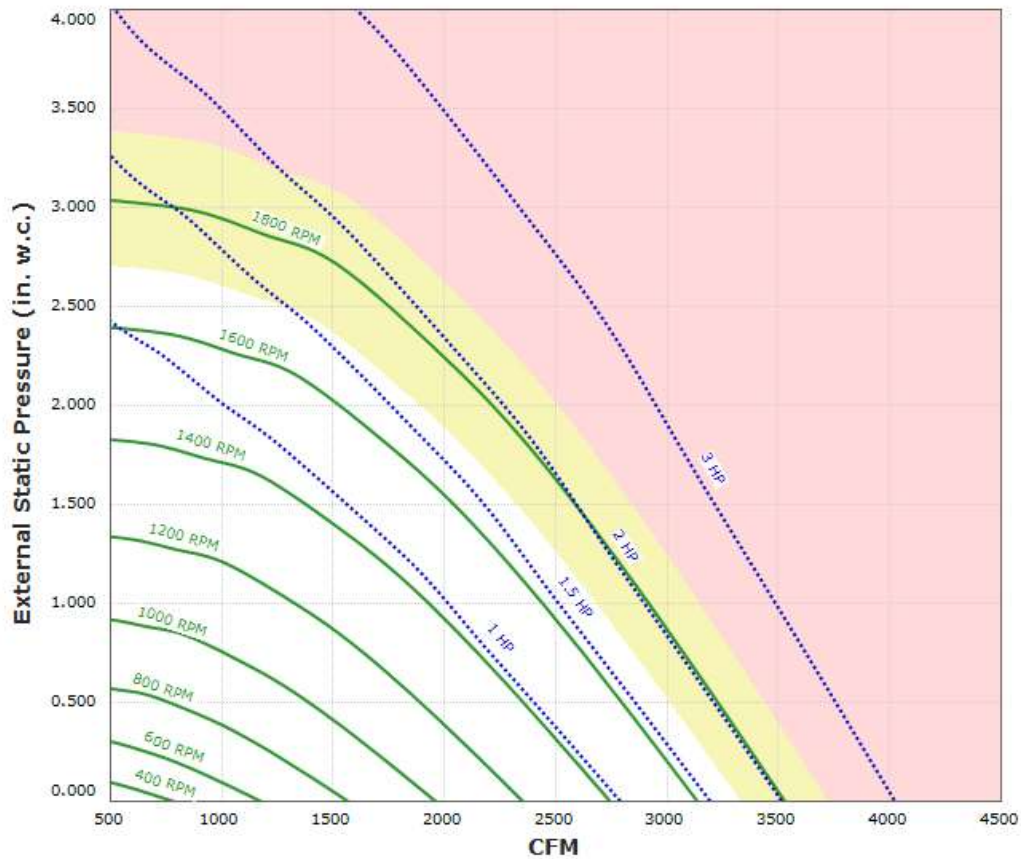

Max Sizeable RPM = 1900 RPM. Curve shown extended beyond this point for reference only.

Max discharge velocity for restaurant applications is 1800 fpm. This equates to 3104 cfm.

- Motor 00112ET3H145T-W22 has an rpm range of 500 to 1150.
- Motor 00112OT3H145T-S has an rpm range of 500 to 1150.
- Motor 00218ET3H145T-W22 has an rpm range of 500 to 1750.
- Motor 00218OT3E56Z-S48PP has an rpm range of 500 to 1700.
- Motor 00218OT3H145T-S has an rpm range of 500 to 1750.
- Motor 00318OT3E56Z-48PP has an rpm range of 500 to 1730.
- Motor DTP0016 has an rpm range of 500 to 1150.
- Motor DTP0016-50 has an rpm range of 500 to 958.
- Motor DTP0024 has an rpm range of 500 to 1740.
- Motor DTP0024-50HZ has an rpm range of 500 to 1415.
- Motor DTP1/54 has an rpm range of 500 to 1750.
- Motor GP0016 has an rpm range of 500 to 1150.
- Motor GP0016-50 has an rpm range of 500 to 958.
- Motor GP0024 has an rpm range of 500 to 1740.
- Motor GP0024-50 has an rpm range of 500 to 1440.
- Motor NP0024 has an rpm range of 500 to 1740.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

Catalog #112C

April 2022