


## RA-RE2000DD Performance Curve

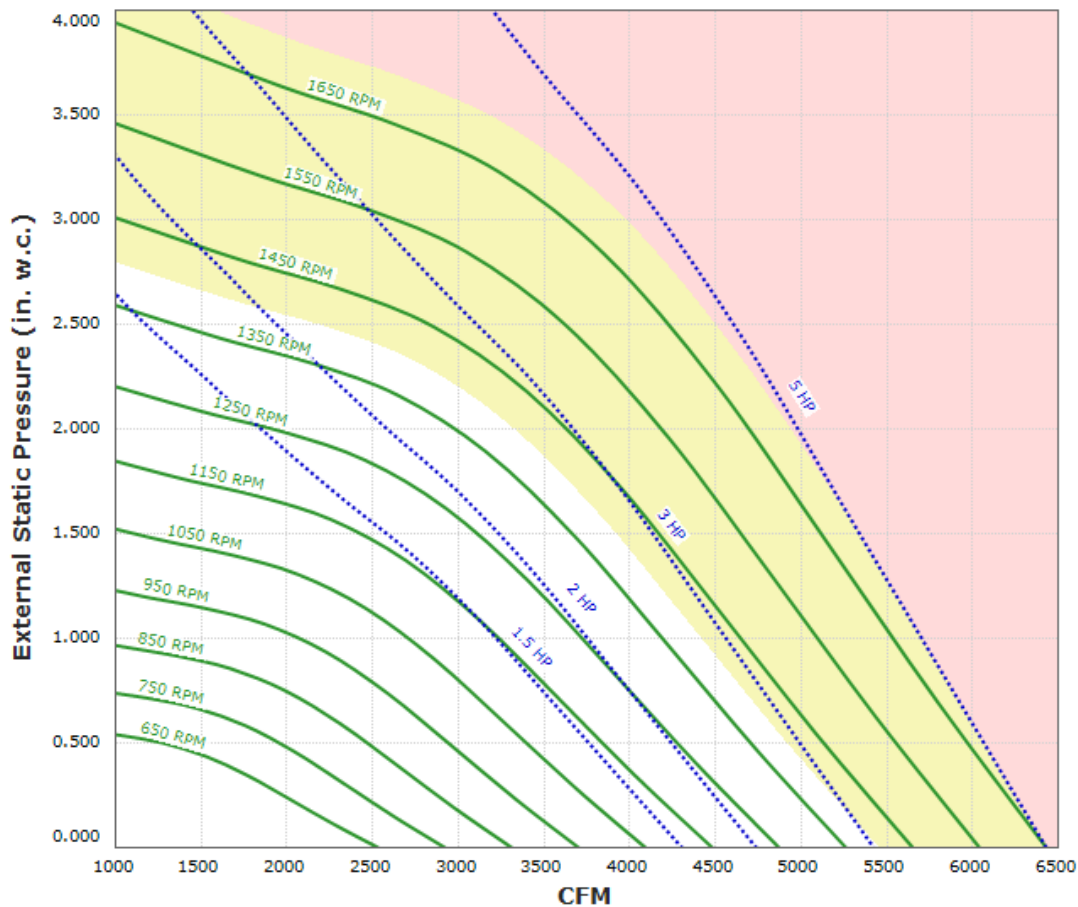

**Max Sizeable RPM = 1700 RPM. Curve shown extended beyond this point for reference only.**

**Max discharge velocity for restaurant applications is 1800 fpm. This equates to 3875 cfm.**

- Motor 00152ET3H184T-W22 has an rpm range of 650 to 1150.
- Motor 00212ET3H184T-W22 has an rpm range of 650 to 1150.
- Motor 00212OT3H184T-S has an rpm range of 650 to 1150.
- Motor 00318ET3H182T-W22 has an rpm range of 650 to 1700.
- Motor 00318OT3H182T-S has an rpm range of 650 to 1700.
- Motor 00518ET3H184T-W22 has an rpm range of 650 to 1700.
- Motor 00518OT3H184T-S has an rpm range of 650 to 1700.
- Motor DTP0024 has an rpm range of 650 to 1700.
- Motor DTP0024-50HZ has an rpm range of 650 to 1415.
- Motor DTP0026 has an rpm range of 650 to 1150.
- Motor DTP0034 has an rpm range of 650 to 1700.
- Motor DTP0034-50HZ has an rpm range of 650 to 1438.
- Motor DTP0054 has an rpm range of 650 to 1700.
- Motor DTP0054-50 has an rpm range of 650 to 1435.
- Motor DTP1/56 has an rpm range of 650 to 1150.
- Motor NP0034 has an rpm range of 650 to 1700.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

Catalog #112R  
August 2020