


WOOD LAMINATE BEAM
MIN/MAX WIDTH 6"-10"

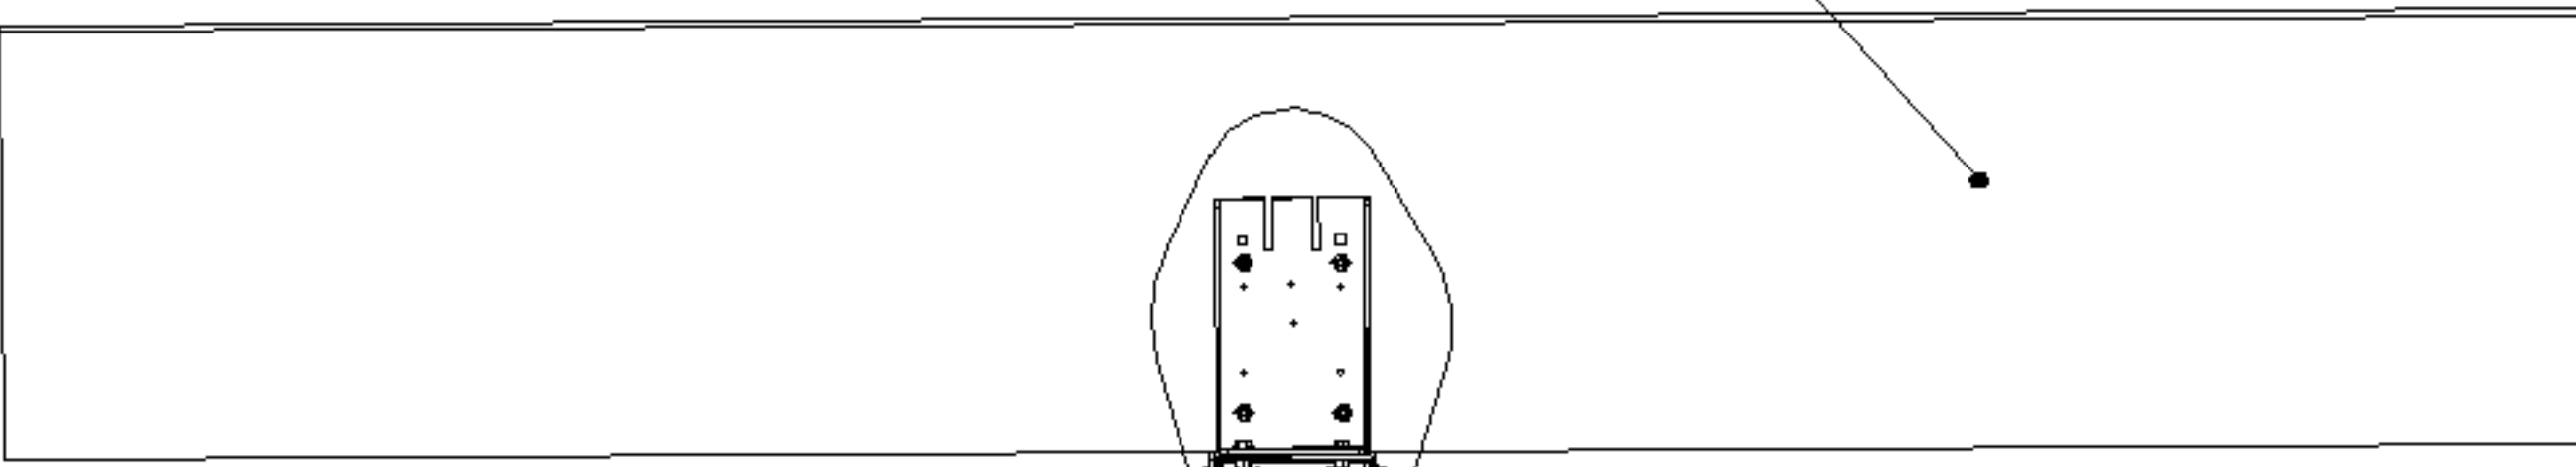

OPTIONAL EXTENSION (AVAILABLE
IN 2', 4', 6' & 8' LENGTHS) MAX 2 PER
FAN

STANDARD PIVOT
MOUNT (AVAILABLE IN
1', 2' OR 4' LENGTHS)

SAFETY CABLE

SECURE TO
ROOFING MEMBER

GUY WIRES (4)


FAN MOUNTED
VFD (OPTIONAL)

CLEARANCES:

- 60" MIN CENTER OF FAN TO ROOF DECK
- 30" MIN FROM FAN BLADES LEADING EDGE TO OBSTRUCTIONS ABOVE OR BELOW
- 18" MIN FROM SIDE OF FAN TO ANY OBSTRUCTION
- 144" MIN FROM FLOOR TO FAN LEADING EDGE HEIGHT

MAIN HUB AND
DRIVE ASSEMBLY

45°-60°

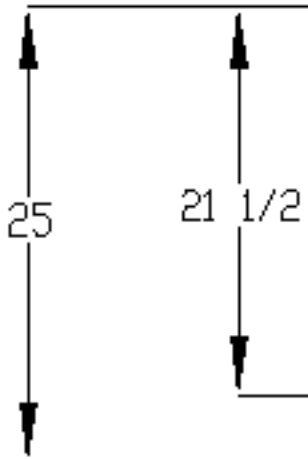

FAN BLADES 6', 8', 10', 12', 14', 16', 18', 20', 22' OR 24'

