


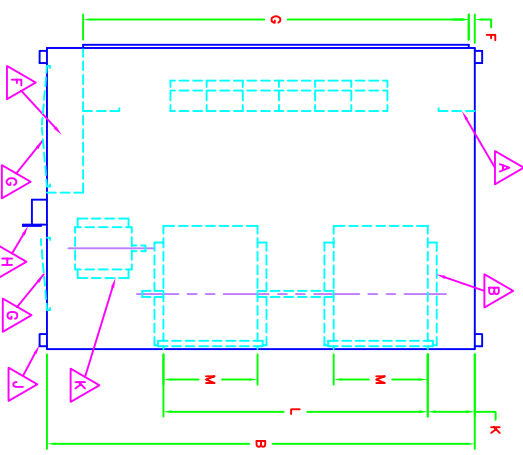
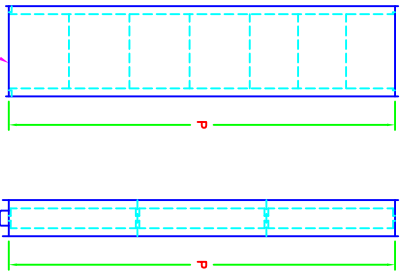
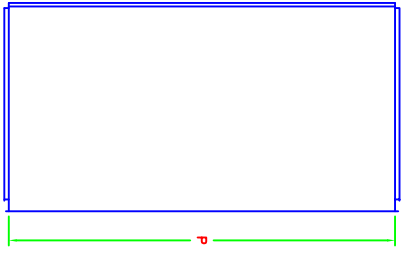


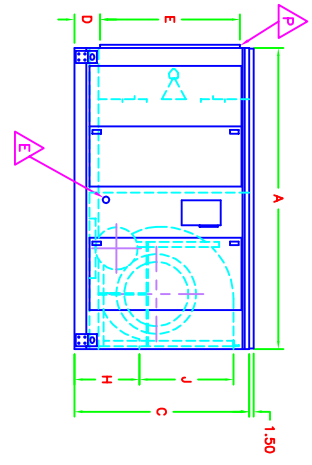



MODEL NO	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	Y	Z	**FA FILTER QUANTITY	**FA FILTER/HOOD QUANTITY
222	100	146	58	8.5	46.5	2	140	20.31	27.5	19.5	77	27.5	46.75	140.25	69.5	76	28	10	27.75	77.25	27.75	24	10	(20)20"x25" & (9)16"x25"	(2)120"x25"
225	100	146	58	8.5	46.5	2	140	21.75	31.5	15.5	88	31.5	46.75	140.25	69.5	76	28	10	31.75	88.25	31.75	24	10	(20)20"x25" & (9)16"x25"	(2)120"x25"
227	100	156	66	10.5	52.5	2	152	23	34.5	19.5	96	34.5	52.75	152.25	64	72	28	10	34.75	96.25	34.75	24	10	(30)20"x25" & (10)16"x25"	-
230	100	156	66	10.5	52.5	2	152	24.88	37	15.5	104	37	52.75	152.25	64	72	28	10	37.25	104.25	37.25	24	10	(30)20"x25" & (10)16"x25"	-

Rev 08/25/14
30400031



- ▲ BURNER PROFILE
- ▲ TWIN FC DWDI BLOWERS
- ▲ LIFT-OFF INTAKE FILTER SERVICE DOOR
- ▲ DAMPER MOTOR
- ▲ GAS CONNECTION
- ▲ ELEC./MANIFOLD CONTROLS VESTIBULE
- ▲ HINGED SERVICE DOOR
- ▲ MAIN DISCONNECT SWITCH
- ▲ LIFTING LUG (4-PLACES)
- ▲ SUPPLY FAN BLOWER MOTOR
- ▲ STANDARD FRESH AIR INTAKE HOOD/FILTER COMBINATION (FILTERS SUPPLIED ONLY WHEN ORDERED)
- ▲ FRESH AIR INTAKE FILTER
- ▲ FRESH AIR INTAKE DAMPER
- ▲ FRESH AIR INTAKE OPENING
- ▲ DISCHARGE DAMPER
- ▲ DISCHARGE DIFFUSER (2-PIECES)
- ▲ HOOD SUPPORT LEGS



TYPICAL BASE DETAIL

- EQUIPMENT SUPPORT RECOMMENDED UNDER FRESH AIR INTAKE FILTER
- EQUIPMENT SUPPORT RECOMMENDED UNDER FRESH AIR INTAKE HOOD
- BURNER PROFILE AVAILABLE IN VAV CONFIGURATION
- BASE DESIGNED FOR FLAT MOUNT OR CURB MOUNT
- ALL DIMENSIONS ARE SHOWN IN INCHES
- **FA : FRESH AIR

RUPP AIR MANAGEMENT SYSTEMS

DRAWING PART NUMBER: H2222230SDLR

SCALE: 1:1

DO NOT SCALE DRAWING USE DIMENSIONS SHOWN
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

DRAWN BY: TKL
DATE: 02/10/00
APPROVED BY:
DATE:

REV	DESCRIPTION
01	Changed 227/230 Filter Quantity

TITLE: HORIZONTAL-222, 225, 227 AND 230
HORIZONTAL DISCHARGE LEFT TO RIGHT

ECN NO	DWG	EW	DATE
6-25-14			

TOLERANCES:
2 PLCS ±.03
3 PLCS ±.015