
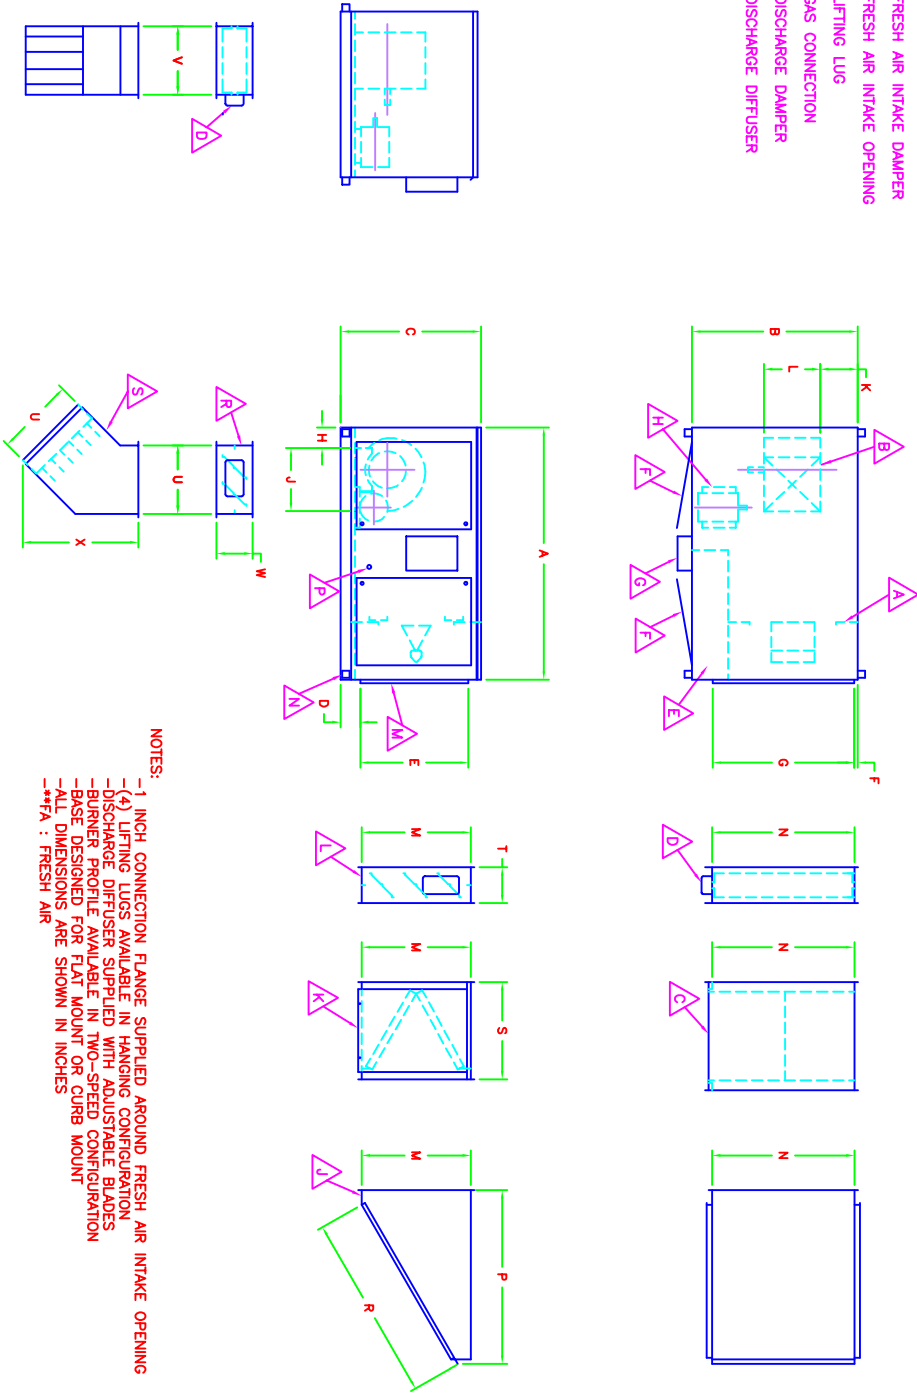


MODEL NO	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	**FA FILTER QUANTITY	**FA FILTER/HOOD QUANTITY
9	70	46	38	5.5	30	1	39.25	8.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
10	70	46	38	5.5	30	1	39.25	8.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
12	70	46	38	5.5	30	1	39.25	8.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
15	70	46	38	5.5	30	1	39.25	8.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"

- ▲ BURNER PROFILE
- ▲ FC DWIDL BLOWER
- ▲ LIFT-OFF INTAKE FILTER SERVICE DOOR
- ▲ DAMPER MOTOR
- ▲ ELEC/MANIFOLD CONTROLS VESTIBULE
- ▲ HINGED SERVICE DOOR
- ▲ MAIN DISCONNECT SWITCH
- ▲ SUPPLY FAN BLOWER MOTOR
- ▲ STANDARD FRESH AIR INTAKE HOOD/FILTER COMBINATION (FILTERS SUPPLIED ONLY WHEN ORDERED)
- ▲ FRESH AIR INTAKE FILTER
- ▲ FRESH AIR INTAKE DAMPER
- ▲ FRESH AIR INTAKE OPENING
- ▲ LIFTING LUG
- ▲ GAS CONNECTION
- ▲ DISCHARGE DAMPER
- ▲ DISCHARGE DIFFUSER



- NOTES:
- 1 INCH CONNECTION FLANGE SUPPLIED AROUND FRESH AIR INTAKE OPENING
  - (4) LIFTING LUGS AVAILABLE IN HANGING CONFIGURATION
  - DISCHARGE DIFFUSER SUPPLIED WITH ADJUSTABLE BLADES
  - BURNER PROFILE AVAILABLE IN TWO-SPEED CONFIGURATION
  - BASE DESIGNED FOR FLAT MOUNT OR CURB MOUNT
  - ALL DIMENSIONS ARE SHOWN IN INCHES
  - \*\*FA : FRESH AIR

30400015

DRAWN BY: TKL  
DATE: 02/10/00

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

REVISIONS

REV	TITLE	DESCRIPTION

RAM-9, 10, 12 AND 15  
ARRANGEMENT H5 DOWN DISCHARGE

ECH NO: \_\_\_\_\_

DWG: \_\_\_\_\_

DATE: \_\_\_\_\_

TOLERANCES

2 PLCS	±.03
3 PLCS	±.015

51000040C

30400015