



MODEL NO	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD	EE	FF	GG	**FA FILTER QUANTITY	**FA FILTER/HOOD QUANTITY	**RA FILTER QUANTITY
12M	70	46	38	5.5	30	1	39.25	10.5	18.75	8.5	18.75	30.25	39.5	48	51.66	27	10	19	19	10	24	4.5	11.5	4.5	29.5	11.75	24.25	29.75	39.5	30	(4)20"x25"	(4)20"x25"	(4)20"x25"
15M	70	46	38	5.5	30	1	39.25	10.5	18.75	8.5	18.75	30.25	39.5	48	51.66	27	10	19	19	10	24	4.5	11.5	4.5	29.5	11.75	24.25	29.75	39.5	30	(4)20"x25"	(4)20"x25"	(4)20"x25"

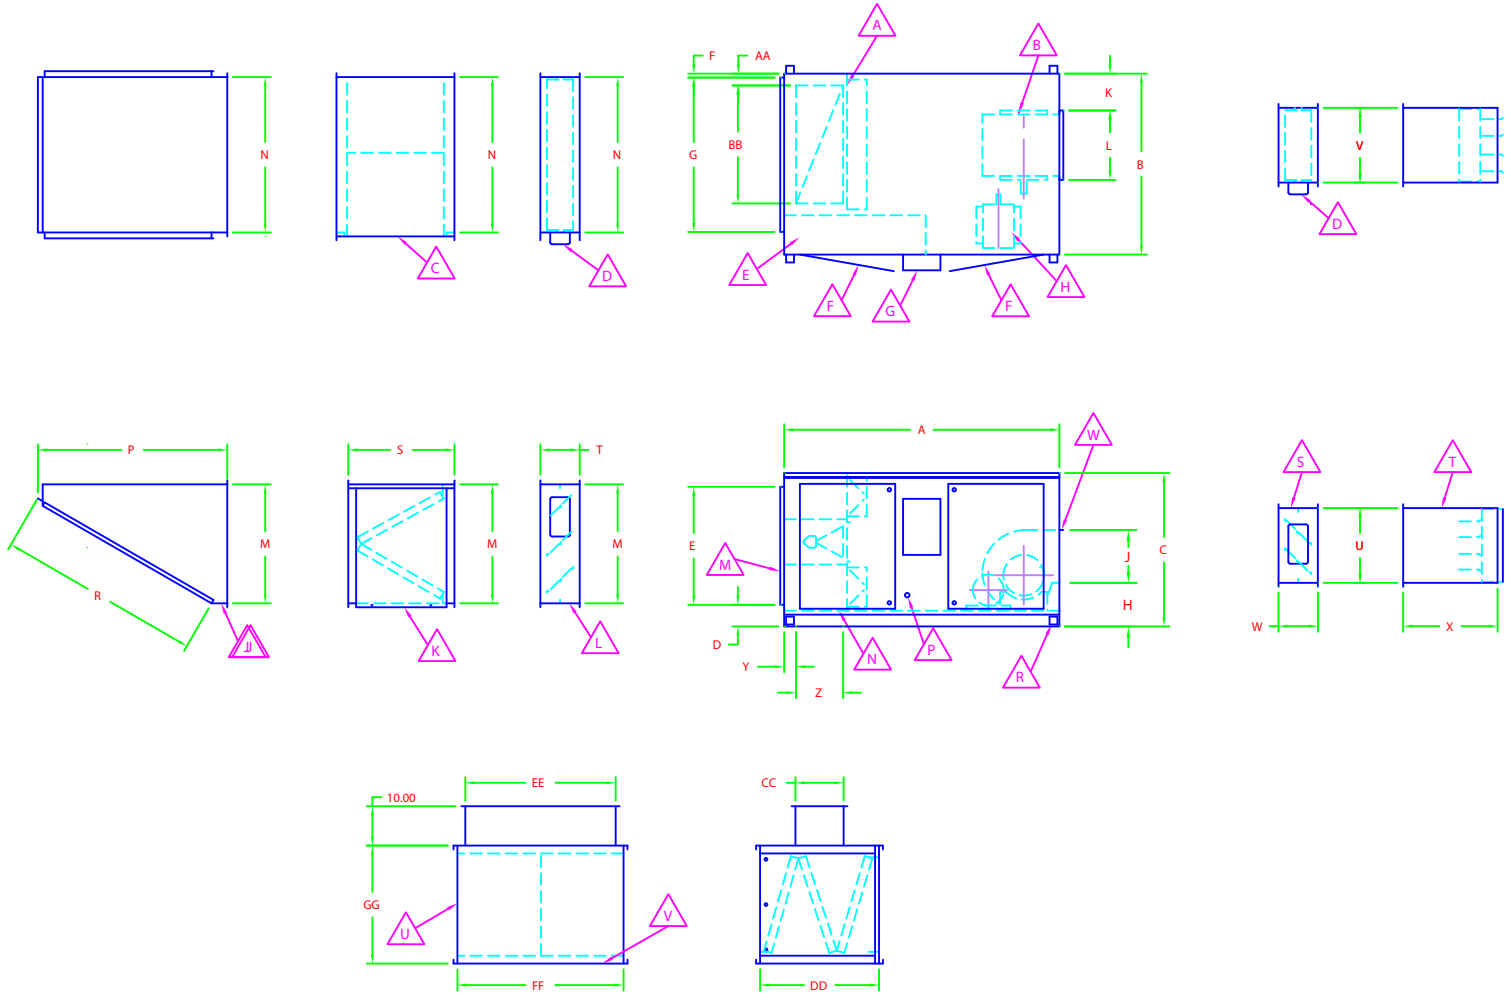

- A** 80/20 BURNER PROFILE
- B** FC DWDI BLOWER
- C** LIFT-OFF INTAKE FILTER SERVICE DOOR
- D** DAMPER MOTOR
- E** ELEC/MANIFOLD CONTROLS VESTIBULE
- F** HINGED SERVICE DOOR
- G** MAIN DISCONNECT SWITCH
- H** SUPPLY FAN BLOWER MOTOR
- J** STANDARD FRESH AIR INTAKE HOOD/FILTER COMBINATION (FILTERS SUPPLIED ONLY WHEN ORDERED)
- K** FRESH AIR INTAKE FILTER
- L** FRESH AIR INTAKE DAMPER
- M** FRESH AIR INTAKE OPENING
- N** RETURN AIR INTAKE OPENING
- P** GAS CONNECTION
- R** LIFTING LUG
- S** DISCHARGE DAMPER
- T** DISCHARGE DIFFUSER
- U** RETURN AIR INTAKE FILTER
- V** RETURN AIR INTAKE FILTER SCREEN
- W** DISCHARGE LOCATOR FLANGE



TYPICAL BASE DETAIL

- NOTES:**
- 1 INCH CONNECTION FLANGE SUPPLIED AROUND FRESH AIR INTAKE OPENING
  - (4) LIFTING LUGS AVAILABLE IN HANGING CONFIGURATION
  - DISCHARGE DIFFUSER SUPPLIED WITH ADJUSTABLE BLADES
  - CRADLE SUPPORT RECOMMENDED UNDER RETURN AIR INTAKE FILTER
  - BASE DESIGNED FOR FLAT MOUNT OR CURB MOUNT
  - ALL DIMENSIONS ARE SHOWN IN INCHES
  - \*\*FA : FRESH AIR
  - \*\*RA : RETURN AIR

DRAWING/PART NUMBER		DATE		ECONO DWG		TOLERANCES	
						2 PLCS +.03	3 PLCS ±.015
REV	REVISION DESCRIPTION	REV	TITLE	APPROVED BY	DATE	<b>RAM-12M AND 15M</b> <b>ARRANGEMENT H1 HORIZONTAL DISCHARGE</b>	
DRAWN BY TKL		DATE 02/10/00		APPROVED BY		DATE	
<b>RUPP AIR</b> <b>MANAGEMENT SYSTEMS</b>				SCALE 1 to 1		DO NOT SCALE DRAWING USE DIMENSIONS SHOWN ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	
DRAWING/PART NUMBER <b>30400051</b>							