


MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED HEATER WITH V-BANK, LPD EVAPORATIVE COOLER AND SCREEN INTAKE

REV#S 02/02/2013

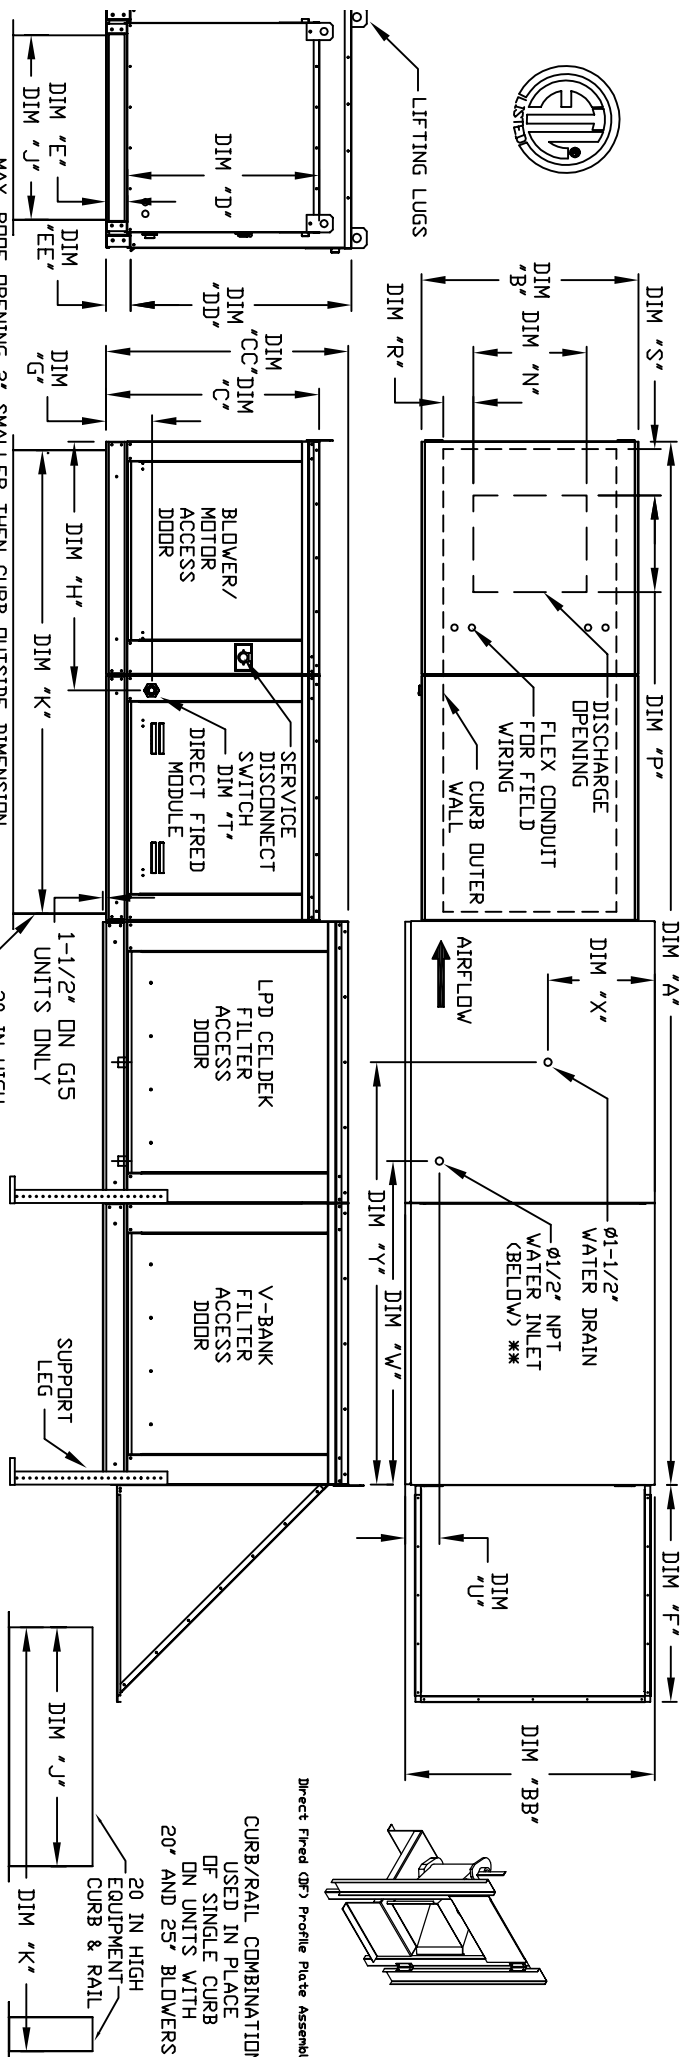

MAX. ROOF OPENING 2" SMALLER THEN CURB OUTSIDE DIMENSION.

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	A	B	BB	C	CC	D	DD	E	EE	F	G	H	J	K	N	P	R	S	U	W	X	Y
D.250-G10	138-7/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	30-5/16	7-13/16	34-13/16	21	71	13-1/4	11-1/2	3-7/8	1-3/4	4-1/2	38-1/2	18	48-1/4
D.500-G10	138-7/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	30-5/16	7-13/16	34-13/16	21	71	13-1/4	11-1/2	3-7/8	1-3/4	4-1/2	38-1/2	18	48-1/4
D.750-G10	158-7/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	34-3/16	7-13/16	42-13/16	31	79	18-3/4	16	6-1/8	8-5/16	4-1/2	44	20	57-1/4
D.500-G15	158-7/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	34-3/16	7-13/16	42-13/16	31	79	18-3/4	16	6-1/8	8-5/16	4-1/2	44	20	57-1/4
D.750-G15	158-7/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	34-3/16	7-13/16	42-13/16	31	79	18-3/4	16	6-1/8	8-5/16	4-1/2	44	20	57-1/4
D.500-G18	158-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	47-1/4	9-1/2	47-13/16	35	84	22	19	6-1/2	7	4-1/2	41-1/8	23-1/2	52-7/8
D.750-G18	158-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	47-1/4	9-1/2	47-13/16	35	84	22	19	6-1/2	7	4-1/2	41-1/8	23-1/2	52-7/8
D.1000-G18	189-1/4	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	49-5/8	13-9/16	66-5/16	42	115-3/16	24-7/8	24-7/8	8-9/16	1-1/8	4-1/2	41-1/8	28-7/8	55-7/8
D.1500-G18	189-1/4	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	49-5/8	13-9/16	66-5/16	42	115-3/16	24-7/8	24-7/8	8-9/16	1-1/8	4-1/2	41-1/8	28-7/8	55-7/8
D.2000-G18	199-1/4	59-3/16	74-7/8	58-3/8	58-3/8	53-1/8	53-1/8	5-1/4	5-1/4	49-5/8	13-3/4	76-7/16	52-3/4	125-3/16	31-3/8	31-3/8	10-1/16	3-13/16	4-1/2	41-1/8	37-1/2	52-7/8
D.2500-G18	199-1/4	59-3/16	74-7/8	58-3/8	58-3/8	53-1/8	53-1/8	5-1/4	5-1/4	49-5/8	13-3/4	76-7/16	52-3/4	125-3/16	31-3/8	31-3/8	10-1/16	3-13/16	4-1/2	41-1/8	37-1/2	52-7/8

MODEL	BURNER	BTU RANGE	(MBH)	GAS PRESSURE	GAS CONNECTION	BTU LOW	BTU HIGH	MIN	MAX	*T	QNTY	TI	WEIGHT	MEDIA SIZE & QTY	NOZZLES	MAX. FLOW RATE	V-BANK	FILTER	SIZE & QTY	DISCHARGE	OPENING	WATER	INLET	DRAIN	OPENING
D.250-G10	6"	18	275	7" WC	1 1/4" VC	3/4	3/4	895	LBS	25"x32"x12"	20	6.5	GPH	16"x20"x2"	(8)	16"x20"x2"	20	20"x25"x2"	(8)	16"x20"x2"	19	6-1/2	7	4-1/2	41-1/8
D.500-G10	12"	18	550	7" WC	1 1/4" VC	3/4	3/4	900	LBS	25"x32"x12"	20	6.5	GPH	16"x20"x2"	(8)	16"x20"x2"	20	20"x25"x2"	(8)	16"x20"x2"	19	6-1/2	7	4-1/2	41-1/8
D.750-G10	12"	18	275	7" WC	1 1/4" VC	3/4	3/4	1320	LBS	30"x36"x12"	28	8.4	GPH	20"x25"x2"	(8)	20"x25"x2"	28	20"x25"x2"	(8)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.500-G15	12"	18	550	7" WC	1 1/4" VC	3/4	3/4	1320	LBS	30"x36"x12"	28	8.4	GPH	20"x25"x2"	(8)	20"x25"x2"	28	20"x25"x2"	(8)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.750-G15	12"	18	275	7" WC	1 1/4" VC	3/4	3/4	1320	LBS	30"x36"x12"	28	8.4	GPH	20"x25"x2"	(8)	20"x25"x2"	28	20"x25"x2"	(8)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.500-G18	12"	18	550	7" WC	1 1/4" VC	3/4	3/4	1520	LBS	38"x43"x12"	35	10.15	GPH	16"x20"x2"	(15)	16"x20"x2"	35	16"x20"x2"	(15)	16"x20"x2"	19	6-1/2	7	4-1/2	41-1/8
D.750-G18	12"	18	275	7" WC	1 1/4" VC	3/4	3/4	1520	LBS	38"x43"x12"	35	10.15	GPH	16"x20"x2"	(15)	16"x20"x2"	35	16"x20"x2"	(15)	16"x20"x2"	19	6-1/2	7	4-1/2	41-1/8
D.1000-G18	24"	36.6	1100	7" WC	1 1/4" VC	1	1	2220	LBS	45"x54"x12"	42	12.6	GPH	20"x25"x2"	(12)	20"x25"x2"	42	20"x25"x2"	(12)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.1500-G18	24"	36.6	1100	7" WC	1 1/4" VC	1	1	2220	LBS	45"x54"x12"	42	12.6	GPH	20"x25"x2"	(12)	20"x25"x2"	42	20"x25"x2"	(12)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.2000-G18	48"	73.3	2200	7" WC	3 PSI	1-1/2	1-1/2	2853	LBS	45"x72"x12"	57	20.1	GPH	20"x25"x2"	(12)	20"x25"x2"	57	20"x25"x2"	(12)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8
D.2500-G18	60"	91.6	2750	7" WC	5 PSI	1-1/2	1-1/2	2880	LBS	45"x72"x12"	57	20.1	GPH	20"x25"x2"	(12)	20"x25"x2"	57	20"x25"x2"	(12)	20"x25"x2"	16	6-1/2	7	4-1/2	41-1/8

Direct Fired Profile Plate Specifications:  
 Description: Direct fired burners shall have patented (US Patent No. US6629523B2), self-adjusting profile plates designed to ensure proper air velocity and pressure drop across the burner. Profile plates shall be made of carbon steel (A36) and shall be finished with a minimum of 30ppm of carbon monoxide (CO), and 50ppm of nitrogen dioxide (NO2).  
 Applications: Spring-loaded burner profile plates are engineered to automatically react to the momentum of a fresh air stream, without the need for any motors or actuators to mechanically adjust them. With this feature, all DF units are designed for demand control ventilation (DCV) requirements.  
 Certifications: All profile plate assemblies shall be included in the DF unit's ETL listing and comply with combined safety standards ANSI Z83.4 and CSA 3.7 (non-retracting DF heaters) and ANSI Z83.18 (retracting DF heaters).  
 General Construction: Profile plates shall be formed from G90 galvanized steel.  
 Profile plates shall vary in size per unit.  
 Profile plates shall be mounted along the same plane as the discharge of the burner.  
 Profile plates shall be mounted on a spring mechanism.  
 Spring hinges shall be made from plated steel.