MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED RECIRCULATING HEATER ROOF TOP PACKAGE WITH V-BANK, LPD EVAPORATIVE COOLER AND INTAKE HOOD

IHVBLPDECMBDFDAHRTP
REV.#2 05/05/2015

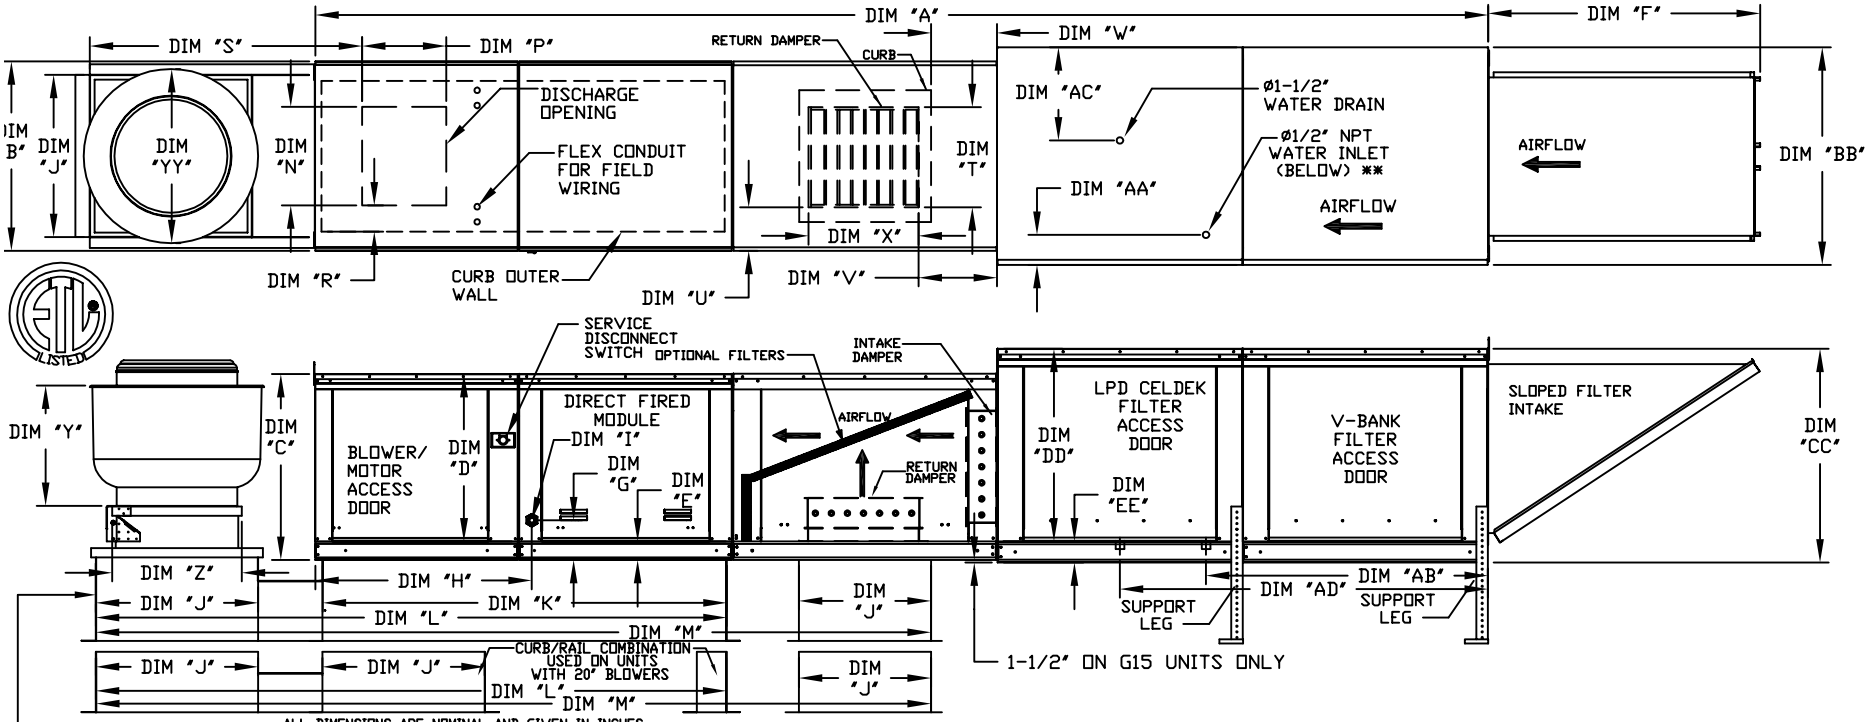

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

	UNIT DIMENSIONS												CURB				DISCHARGE OPENING				RETURN OPENING					WATER INLET		DRAIN OPENING	
MODEL	A	B	BB	C	CC	D	DD	E	EE	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	AA	AB	AC	AD
D.250-G10	181-1/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	53-5/8	7-13/16	34-13/16	21	71	106	137-7/16	13-1/4	11-1/2	3-7/8	36-3/4	14	8	14	12-1/2	18	4-1/2	38-1/2	18	48-1/4
D.500-G10	181-1/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	53-5/8	7-13/16	34-13/16	21	71	106	137-7/16	13-1/4	11-1/2	3-7/8	36-3/4	14	8	14	12-1/2	18	4-1/2	38-1/2	18	48-1/4
D.250-G15	195-1/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	51-5/8	7-13/16	42-13/16	31	79	124	160-7/16	18-3/4	16	6-1/8	50-1/2	22-3/4	8	11	7-1/2	24	4-1/2	44	20	57-1/4
D.500-G15	195-1/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	51-5/8	7-13/16	42-13/16	31	79	124	160-7/16	18-3/4	16	6-1/8	50-1/2	22-3/4	8	11	7-1/2	24	4-1/2	44	20	57-1/4
D.750-G15	195-1/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	51-5/8	7-13/16	42-13/16	31	79	124	160-7/16	18-3/4	16	6-1/8	50-1/2	22-3/4	8	11	7-1/2	24	4-1/2	44	20	57-1/4
D.500-G18	203-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	76-3/8	9-1/2	47-13/16	35	84	133	172-7/16	22	19	6-1/2	56	28	8	7	4-1/2	30	4-1/2	41-1/8	23-1/2	52-7/8
D.750-G18	203-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	76-3/8	9-1/2	47-13/16	35	84	133	172-7/16	22	19	6-1/2	56	28	8	7	4-1/2	30	4-1/2	41-1/8	23-1/2	52-7/8
D.1000-G18	203-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	76-3/8	9-1/2	47-13/16	35	84	133	172-7/16	22	19	6-1/2	56	28	8	7	4-1/2	30	4-1/2	41-1/8	23-1/2	52-7/8
D.1000-920	243-9/16	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	71-3/8	13-9/16	66-5/16	42	115-3/16	171-3/16	219-3/16	24-7/8	24-7/8	8-9/16	57-1/8	33	10	11	8	36	4-1/2	41-1/8	28-7/8	52-7/8
D.1500-920	243-9/16	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	71-3/8	13-9/16	66-5/16	42	115-3/16	171-3/16	219-3/16	24-7/8	24-7/8	8-9/16	57-1/8	33	10	11	8	36	4-1/2	41-1/8	28-7/8	52-7/8

EXHAUST UNIT DIMENSIONS			
MODEL #	Y	YY	Z *
DU12HFA	14-1/2	22	19
NCA8FA DU25HFA DU30HFA DU33HFA	18-1/2	27-1/4	21
NCA10FA DU50HFA	21-1/2	30-1/4	21
NCA14FA DU75HFA DU85HFA	23	33-3/4	24-3/4
NCA16FA	23-1/2	39-3/8	28
NCA18FA	29-1/2	38-7/8	28
NCA24FA	30-5/8	43-3/8	33
NCA30FA	33-1/2	52-3/4	40

MODEL	BURNER LENGTH	BTU RANGE (MBH)		GAS PRESSURE		GAS CONNECTION
		BTU LOW	BTU HIGH	MIN	MAX	"I" (NPT)
D.250-G10	6'	18	275	7" WC	14" WC	3/4
D.500-G10	12'	18	550	7" WC	14" WC	3/4
D.250-G15	6'	18	275	7" WC	14" WC	1
D.500-G15	12'	18	550	7" WC	14" WC	1
D.750-G15	18'	27.5	825	7" WC	14" WC	1
D.500-G18	12'	18	550	7" WC	14" WC	1
D.750-G18	18'	27.5	825	7" WC	14" WC	1
D.1000-G18	24'	36.6	1100	7" WC	14" WC	1
D.1000-920	24'	36.6	1100	7" WC	5 PSI	1-1/4
D.1500-920	30'	45.8	1375	7" WC	5 PSI	1-1/4

CELDEK EVAPORATIVE COOLING UNIT			
TOT. WEIGHT	MEDIA SIZE & QTY	NOZZLES	MAX. FLOW RATE
1080 LBS	25"x32"x12"	20	6.5 GPH
1085 LBS	25"x32"x12"	20	6.5 GPH
1475 LBS	30"x36"x12"	28	8.4 GPH
1480 LBS	30"x36"x12"	28	8.4 GPH
1485 LBS	30"x36"x12"	28	8.4 GPH
1905 LBS	38"x43"x12"	35	10.15 GPH
1910 LBS	38"x43"x12"	35	10.15 GPH
1915 LBS	38"x43"x12"	35	10.15 GPH
2785 LBS	45"x54"x12"	42	12.6 GPH
2800 LBS	45"x54"x12"	42	12.6 GPH

V-BANK FILTER SIZE & QTY
16"x20"x2" (8)
16"x20"x2" (8)
20"x25"x2" (8)
20"x25"x2" (8)
20"x25"x2" (8)
16"x20"x2" (15)
16"x20"x2" (15)
16"x20"x2" (15)
20"x25"x2" (12)
20"x25"x2" (12)

OPTIONAL MIXING BOX FILTERS FILTER SIZE & QTY
10"x16"x2" (5)
10"x16"x2" (5)
20"x25"x2" (2), 16"x25"x2" (1)
20"x25"x2" (2), 16"x25"x2" (1)
20"x25"x2" (2), 16"x25"x2" (1)
15"x20"x2" (4), 15"x15"x2" (2)
15"x20"x2" (4), 15"x15"x2" (2)
15"x20"x2" (4), 15"x15"x2" (2)
18"x25"x2" (4), 16"x20"x2" (2)
18"x25"x2" (4), 16"x20"x2" (2)

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION
**MAX. EVAP WATER PRESSURE = 50 PSI @ 70 DEG. F

Direct Fired Profile Plate Specifications:

Description:
Direct fired burners shall have patented (US Patent No: US6629523B2), self-adjusting profile plates designed to ensure proper air velocity and pressure drop across the burner. Profile plates shall allow burners to achieve clean combustion by limiting by-product levels to a maximum of 5ppm of carbon monoxide (CO), and 0.5ppm of nitrogen dioxide (NO2).

Application:
Spring-loaded burner profile plates are engineered to automatically react to the momentum of a fresh air stream, without the need for any motors or actuators to mechanically adjust them. With this feature, all DF units are designed for demand control ventilation (DCV) requirements.

Certifications:
All profile plate assemblies shall be included in the DF unit's ETL listing and comply with combined safety standards ANSI Z83.4 and CSA 3.7 (non-recirculating DF heaters) and ANSI Z83.18 (recirculating DF heaters).

General Construction:
-Profile plates shall be formed from G90 galvanized steel.
-Profile plates shall vary in size per unit.
-Profile plates shall be mounted along the same plane as the discharge of the burner.
-Design shall incorporate properly torqued, permanently mounted spring hinges.
-Spring hinges shall be made from plated steel.



Direct Fired (DF) Profile Plate Assembly