


MODULAR OUTDOOR SIDE DISCHARGE DIRECT FIRED RECIRCULATING HEATER WITH COOLING, EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD

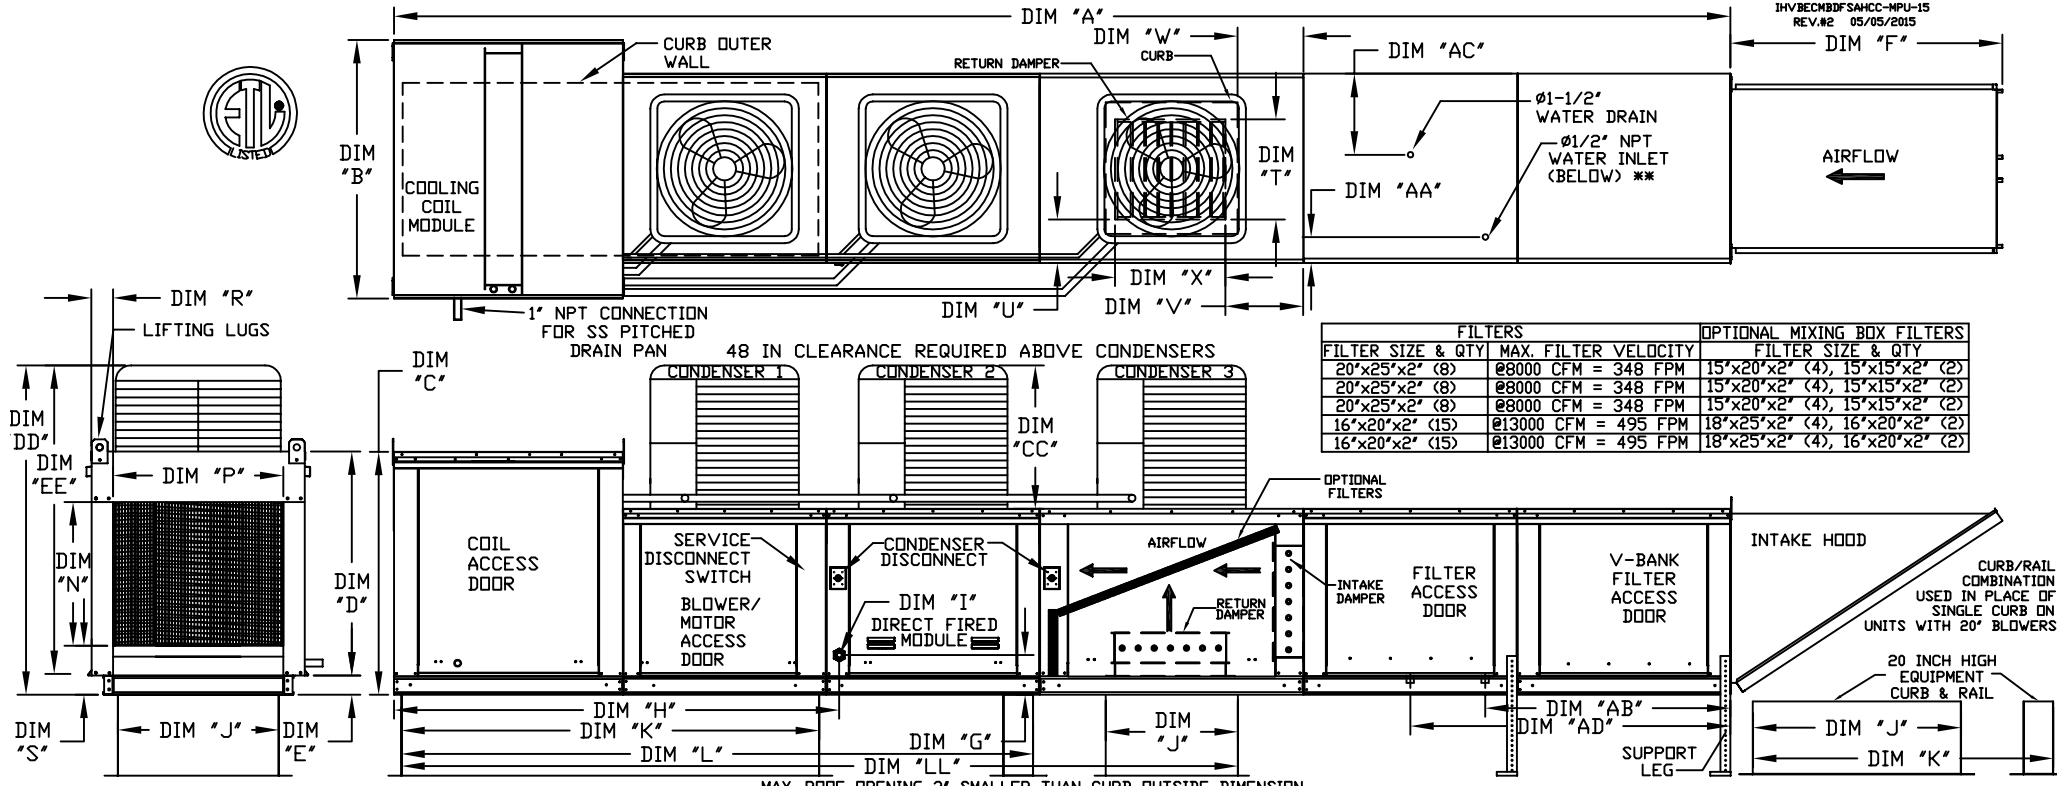

IHV/BECHBDFSAHCC-MPU-15
REV.#2 05/05/2015

FILTERS		OPTIONAL MIXING BOX FILTERS	
FILTER SIZE & QTY	MAX. FILTER VELOCITY	FILTER SIZE & QTY	
20"x25"x2" (8)	@8000 CFM = 348 FPM	15"x20"x2" (4), 15"x15"x2" (2)	
20"x25"x2" (8)	@8000 CFM = 348 FPM	15"x20"x2" (4), 15"x15"x2" (2)	
20"x25"x2" (8)	@8000 CFM = 348 FPM	15"x20"x2" (4), 15"x15"x2" (2)	
16"x20"x2" (15)	@13000 CFM = 495 FPM	18"x25"x2" (4), 16"x20"x2" (2)	
16"x20"x2" (15)	@13000 CFM = 495 FPM	18"x25"x2" (4), 16"x20"x2" (2)	

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS						CURB/RAIL				DISCHARGE OPENING				RETURN OPENING			WATER INLET		DRAIN OPENING				
	A	B	C	D	E	F	G	H	J	K	L	LL	N	P	R	S	T	U	V	X	AA	AB	AC	AD
D.500-G18	248-3/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	90-1/16	35	84	126-1/4	203-15/16	29-5/8	30	11-1/2	7-3/8	28	8	7	30	4-1/2	44	20	57-1/4
D.750-G18	248-3/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	90-1/16	35	84	126-1/4	203-15/16	29-5/8	30	11-1/2	7-3/8	28	8	7	30	4-1/2	44	20	57-1/4
D.1000-G18	248-3/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	90-1/16	35	84	126-1/4	203-15/16	29-5/8	30	11-1/2	7-3/8	28	8	7	30	4-1/2	44	20	57-1/4
D.1000-920	297-7/8	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	13-9/16	120-5/8	42	115-3/16	169-1/2	252-7/8	36-3/4	34	12-1/2	7-3/8	33	10	11	36	4-1/2	41-1/8	23-1/2	52-7/8
D.1500-920	297-7/8	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	13-9/16	120-5/8	42	115-3/16	169-1/2	252-7/8	36-3/4	34	12-1/2	7-3/8	33	10	11	36	4-1/2	41-1/8	23-1/2	52-7/8

UNIT INFORMATION

MODEL	BURNER LENGTH	BTU RANGE (MBH)		GAS PRESSURE		GAS CONNECTION		TONNAGE RANGE		STANDARD EVAPORATIVE COOLING UNIT				CELDEK EVAPORATIVE COOLING UNIT				
		LOW	HIGH	MIN	MAX	"I" (NPT)	MIN	MAX	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
D.500-G18	12"	18	550	7" WC	14" WC	1	15 Ton	15 Ton	2160 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2150 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH
D.750-G18	18"	27.5	825	7" WC	14" WC	1	15 Ton	15 Ton	2165 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2155 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH
D.1000-G18	24"	36.6	1100	7" WC	14" WC	1	15 Ton	15 Ton	2170 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2160 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH
D.1000-920	24"	36.6	1100	7" WC	5 PSI	1-1/4	15 Ton	15 Ton	3455 LBS	16"x20"x2" (15)	572 FPM	24	12 GPH	3425 LBS	38"x43"x12"	1322 FPM	35	10.15 GPH
D.1500-920	30"	45.8	1375	7" WC	5 PSI	1-1/4	15 Ton	15 Ton	3470 LBS	16"x20"x2" (15)	572 FPM	24	12 GPH	3440 LBS	38"x43"x12"	1322 FPM	35	10.15 GPH


*ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

**MAX. EVAP WATER PRESSURE = 50 PSI @ 70 DEG. F

CONDENSER INFORMATION							
MODEL	WEIGHT*	TONNAGE			CC	DD	EE
		#1	#2	#3			
15 TON-G18	588 LBS	5 TON	5 TON	5 TON	29-15/16	73-5/16	68-1/16
15 TON-920	588 LBS	5 TON	5 TON	5 TON	29-15/16	94-5/16	89-1/16

R410A REFRIGERANT

Direct Fired Profile Plate Specifications:
Description: Direct fired burners shall have patented (US Patent No. US6295238B2), self-adjusting profile plates designed to ensure proper air velocity and pressure drop across the burner. Profile plates shall allow burners to achieve clean combustion by limiting by-product levels to a maximum of 5ppm of carbon monoxide (CO), and 0.5ppm of nitrogen dioxide (NO2).
Application: Spring-loaded burner profile plates are engineered to automatically react to the momentum of a fresh air stream, without the need for any motors or actuators to mechanically adjust them. With this feature, all DF units are designed for demand control ventilation (DCV) requirements.
Certifications: All profile plate assemblies shall be included in the DF unit's ETL listing and comply with combined safety standards ANSI Z83.4 and CSA 3.7 (non-recirculating DF heaters) and ANSI Z83.18 (recirculating DF heaters).
General Construction:
 -Profile plates shall be formed from G90 galvanized steel.
 -Profile plates shall vary in size per unit.
 -Profile plates shall be mounted along the same plane as the discharge of the burner.
 -Design shall incorporate properly torqued, permanently mounted spring hinges.
 -Spring hinges shall be made from plated steel.



Direct Fired (DF) Profile Plate Assembly