



# R1D.250-G10 Performance Curves

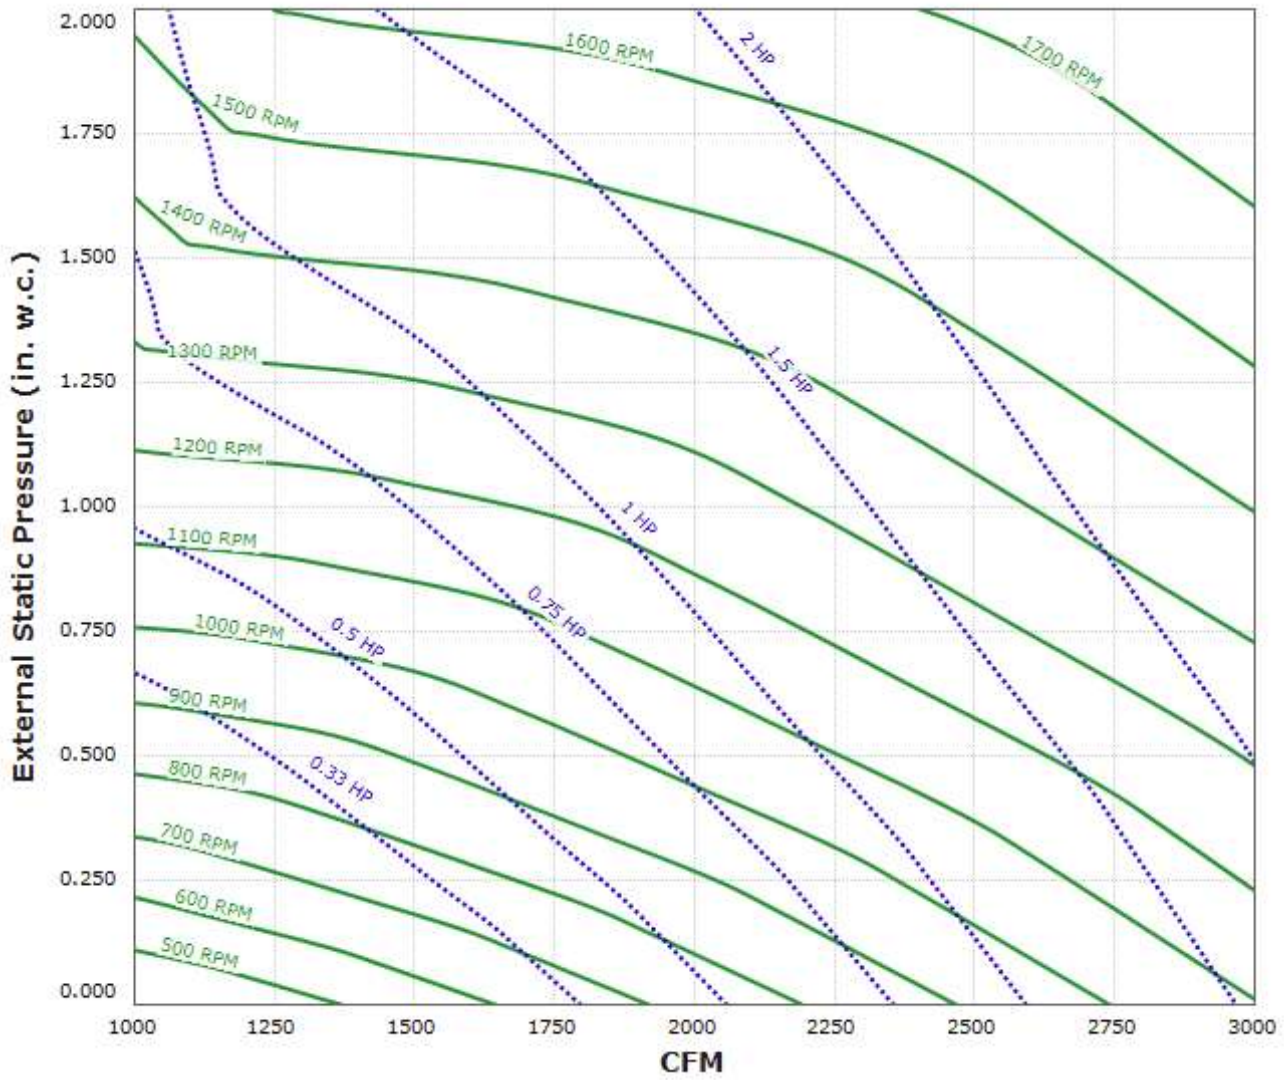

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.  
Max listed CFM for Recirculating Direct Fired Heaters : A1=2500

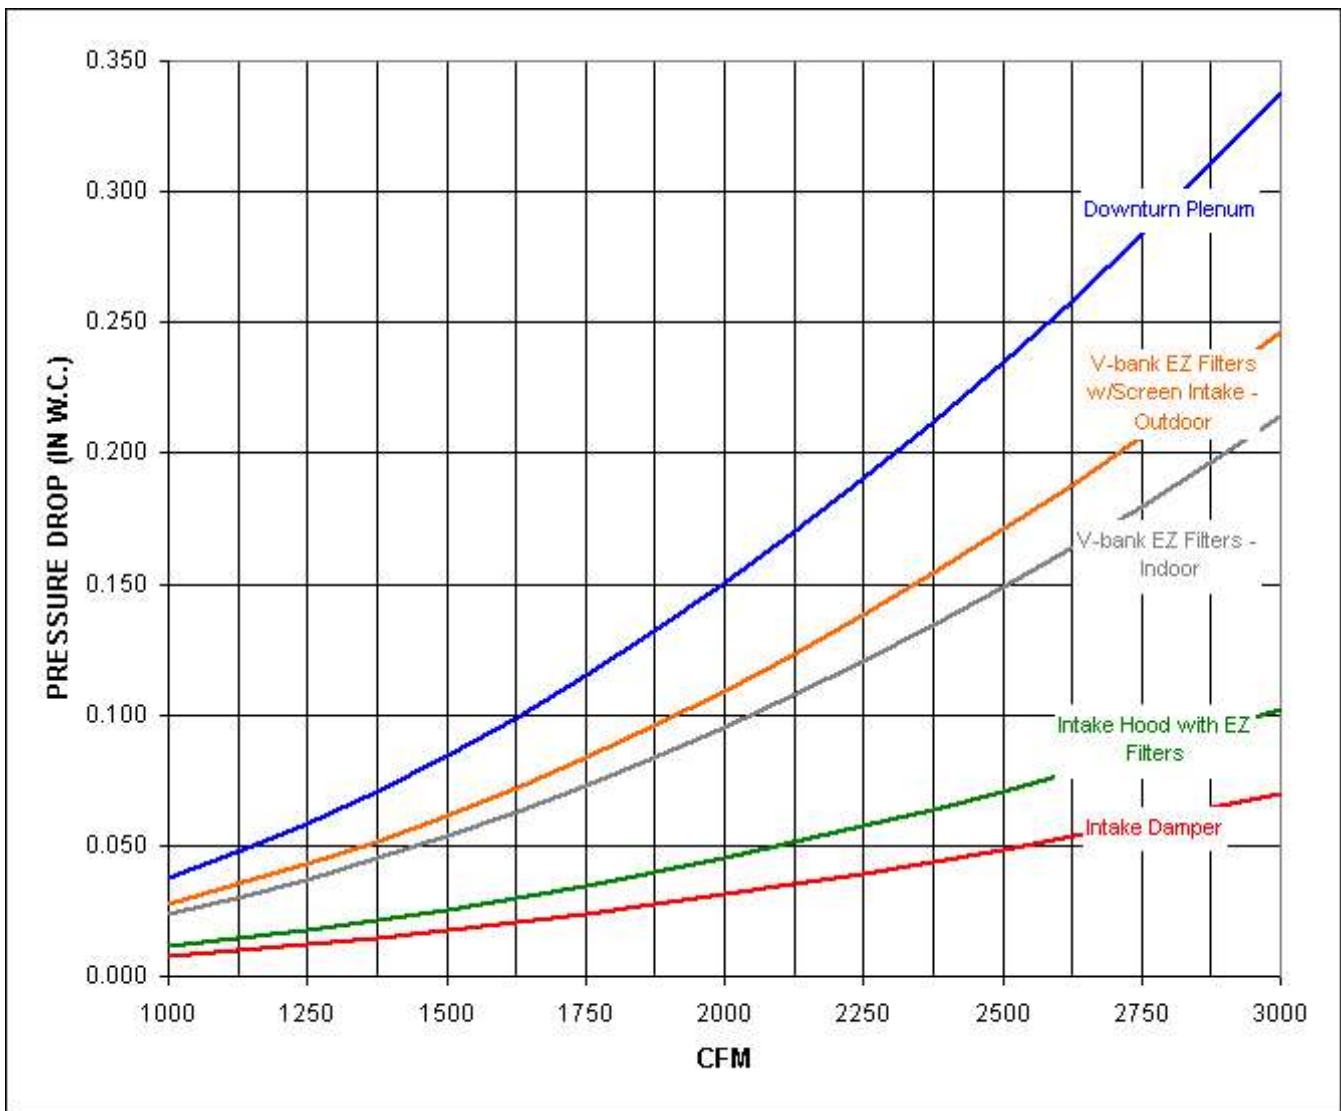

Notes:

The static pressure of non-woven polyester filters is 2 times the static pressure of standard EZ Kleen Filters.  
 The static pressure of throw-away filters is 1.33 times the static pressure of standard EZ Kleen Filters.  
 The static pressure of throw-away MERV 13 filters is 1.9 times the static pressure of standard EZ Kleen Filters.  
 Throw-away filters are used in v-bank intakes only.

