


R3D.750-24D Performance Curves

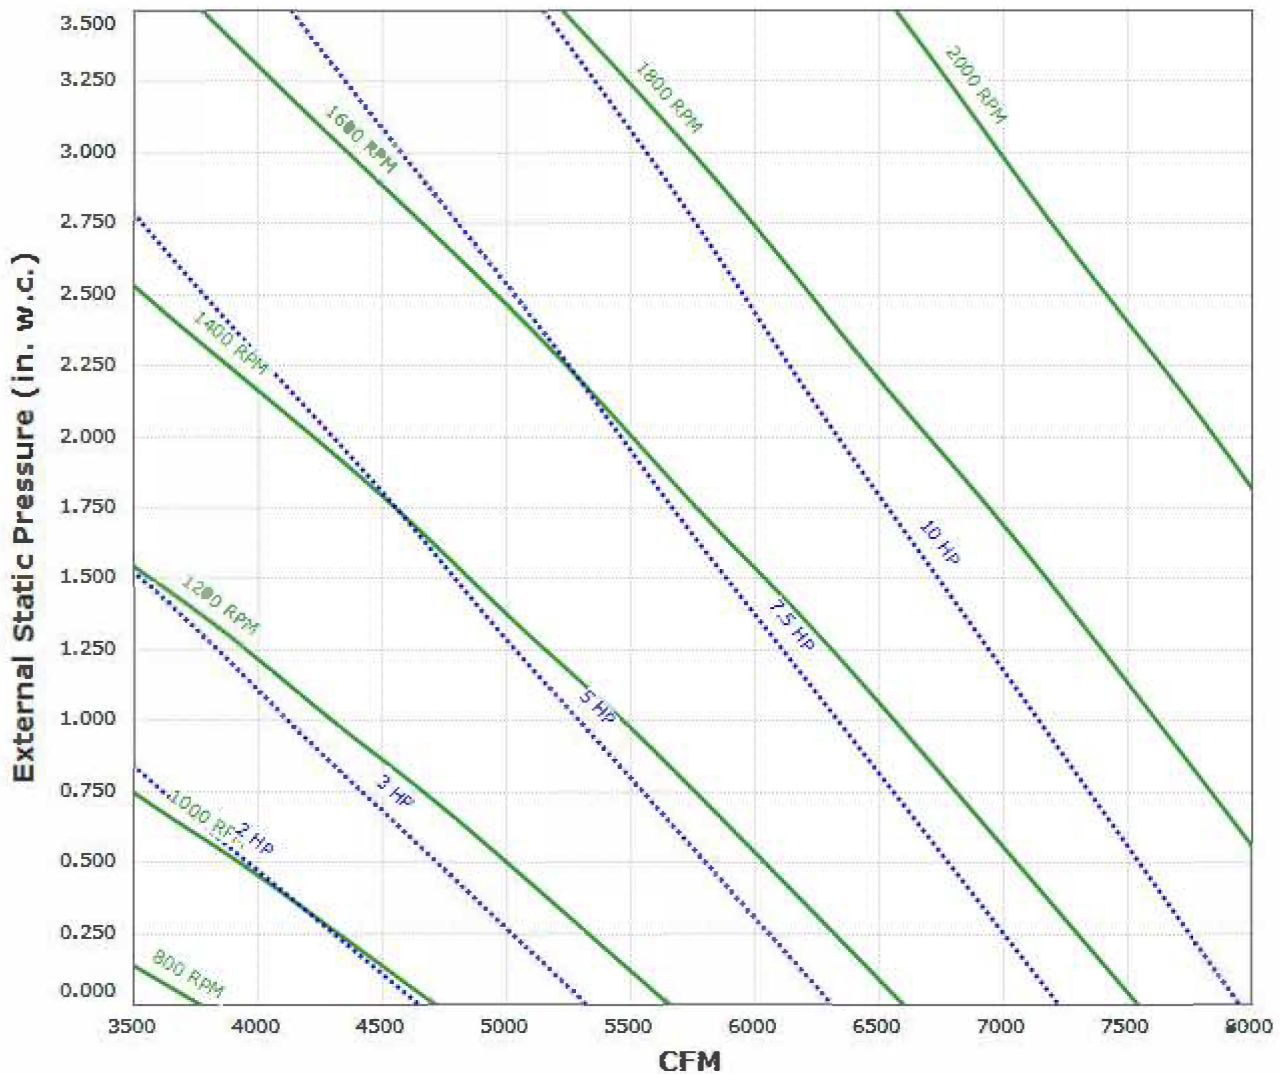

Max Sizeable RPM = 2000 RPM. Curve shown extended beyond this point for reference only.

Motor DHP00345 has an rpm range of 800 to 1755.

Motor DHP00545 has an rpm range of 800 to 1750.

Motor DHP01045 has an rpm range of 800 to 1750.

Motor DHP7/545 has an rpm range of 800 to 1750.

Motor DTP0026 has an rpm range of 800 to 1150.

Motor DTP0034 has an rpm range of 800 to 1755.

Motor DTP0034-50HZ has an rpm range of 800 to 1438.

Motor DTP0036 has an rpm range of 800 to 1150.

Motor DTP0054 has an rpm range of 800 to 1750.

Motor DTP0054-50 has an rpm range of 800 to 1435.

Motor DTP0056 has an rpm range of 800 to 1150.

Motor DTP0104 has an rpm range of 800 to 1755.

Motor DTP0104-50 has an rpm range of 800 to 1755.

Motor DTP7/54 has an rpm range of 800 to 1750.

Motor DTP7/54-50 has an rpm range of 800 to 1470.

Motor EP00345 has an rpm range of 800 to 1755.


Motor EP00545 has an rpm range of 800 to 1745.

Motor EP01045 has an rpm range of 800 to 1755.

Motor EP7/545 has an rpm range of 800 to 1755.

Motor GP0034 has an rpm range of 800 to 1800.
 Motor GP0034-50 has an rpm range of 800 to 1440.
 Motor GP0054 has an rpm range of 800 to 1800.
 Motor GP0054-50 has an rpm range of 800 to 1440.
 Motor GP0104 has an rpm range of 800 to 1800.
 Motor GP0104-50 has an rpm range of 800 to 1440.
 Motor GP7/54 has an rpm range of 800 to 1800.
 Motor GP7/54-50 has an rpm range of 800 to 1440.
 Motor NP0036 has an rpm range of 800 to 1150.

Max listed CFM for Recirculating Direct Fired Heaters : A3=6500

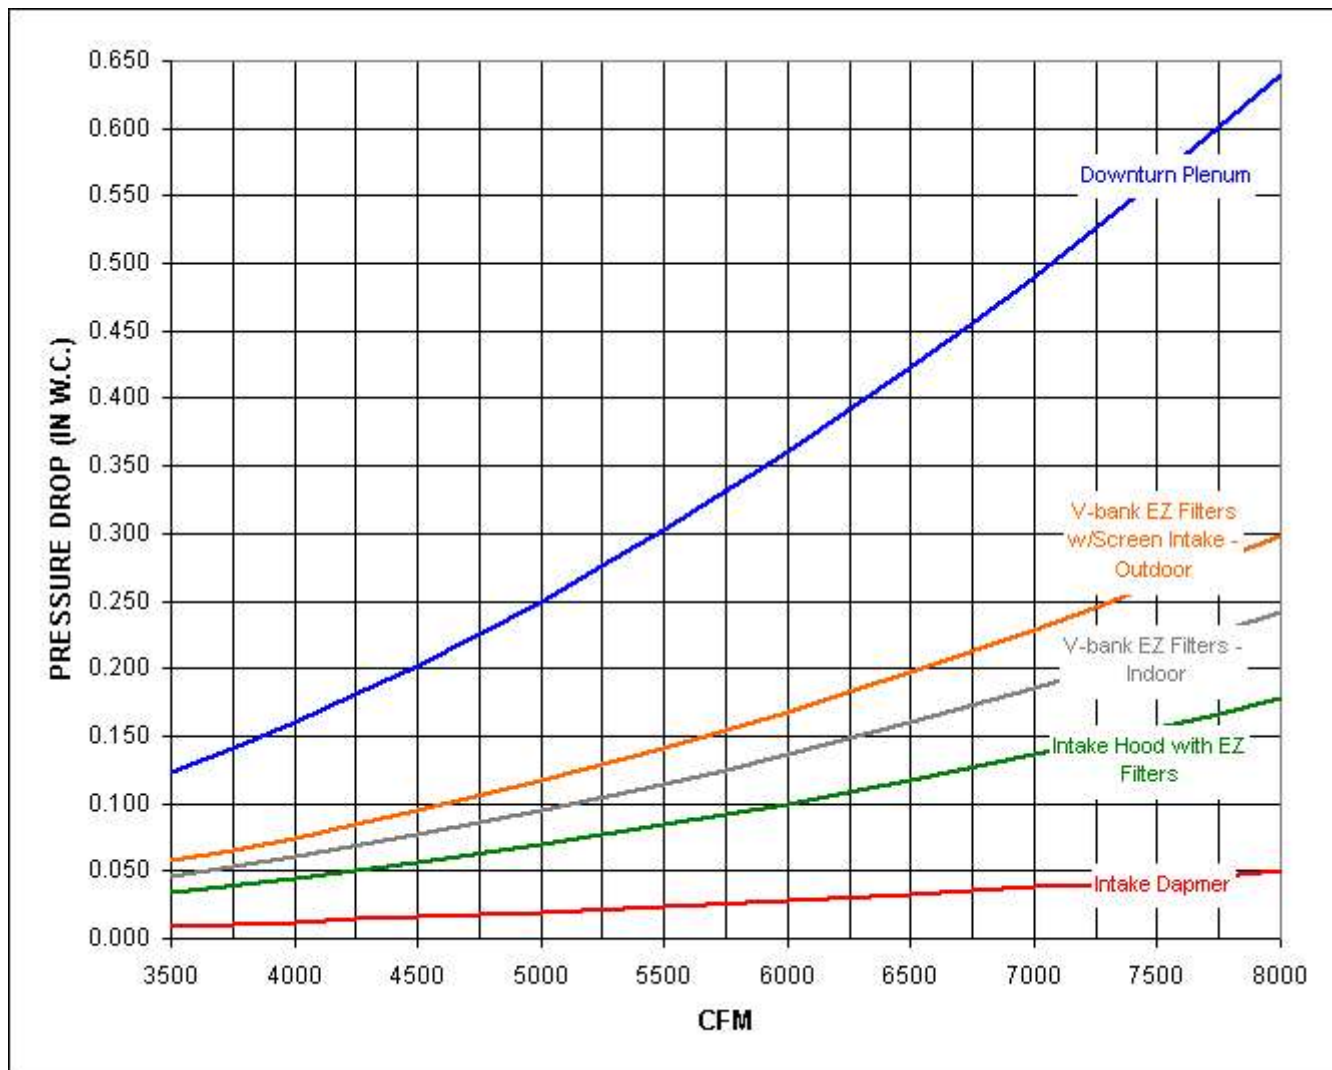

Notes:

The static pressure of non-woven polyester filters is 2 times the static pressure of standard EZ Kleen Filters.
 The static pressure of throw-away filters is 1.33 times the static pressure of standard EZ Kleen Filters.
 The static pressure of throw-away MERV 13 filters is 1.9 times the static pressure of standard EZ Kleen Filters.
 Throw-away filters are used in v-bank intakes only.

