



R4D.1000-920 Performance Curves

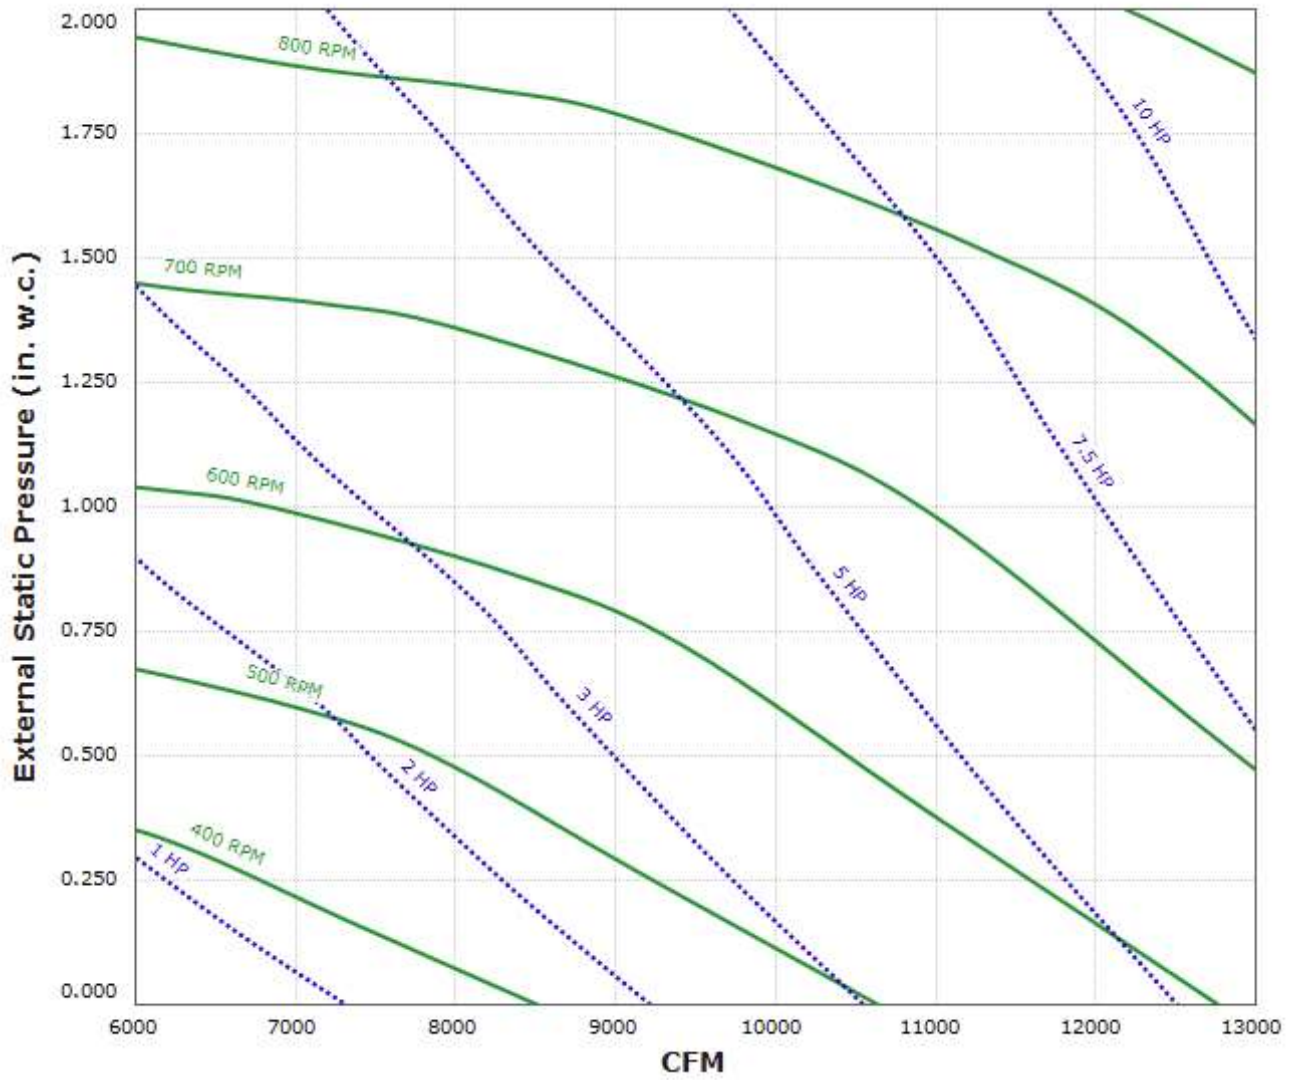

Max Sizeable RPM = 1100 RPM. Curve shown extended beyond this point for reference only.
Max listed CFM for Recirculating Direct Fired Heaters : A4=11000

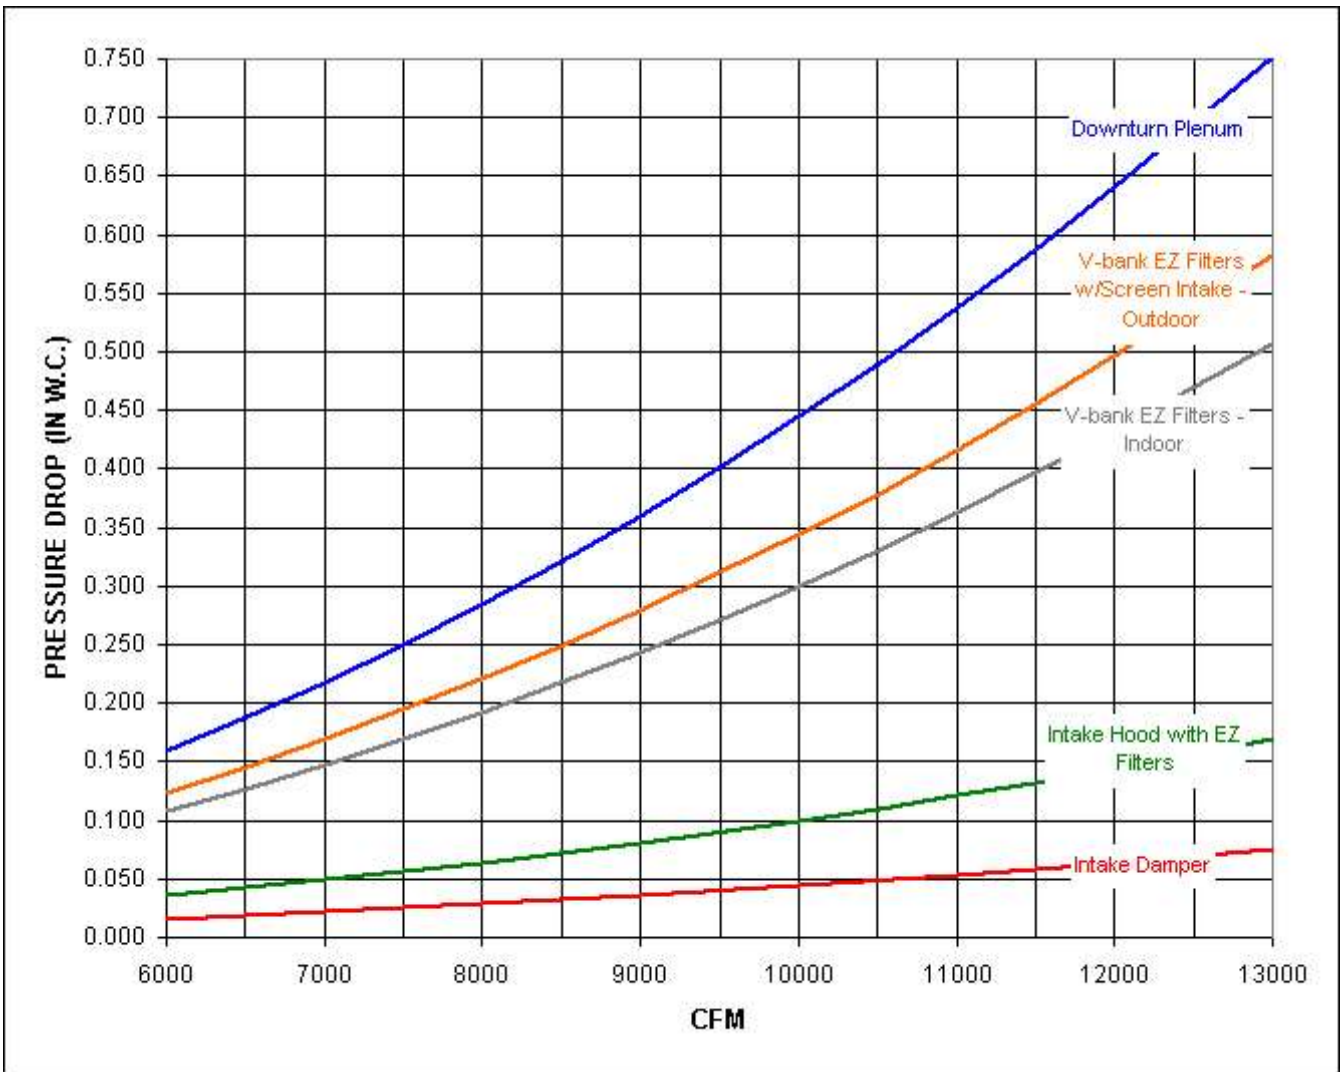

Notes:

The static pressure of non-woven polyester filters is 2 times the static pressure of standard EZ Kleen Filters.
 The static pressure of throw-away filters is 1.33 times the static pressure of standard EZ Kleen Filters.
 The static pressure of throw-away MERV 13 filters is 1.9 times the static pressure of standard EZ Kleen Filters.
 Throw-away filters are used in v-bank intakes only.

