MODULAR OUTDOOR DOWN DISCHARGE IBT HEATER–ROOF TOP PACKAGE WITH V–BANK, EVAPORATIVE COOLER AND SCREEN INTAKE

SIVBECSAHIBTRTP-ML
REV.#2 07/25/2012

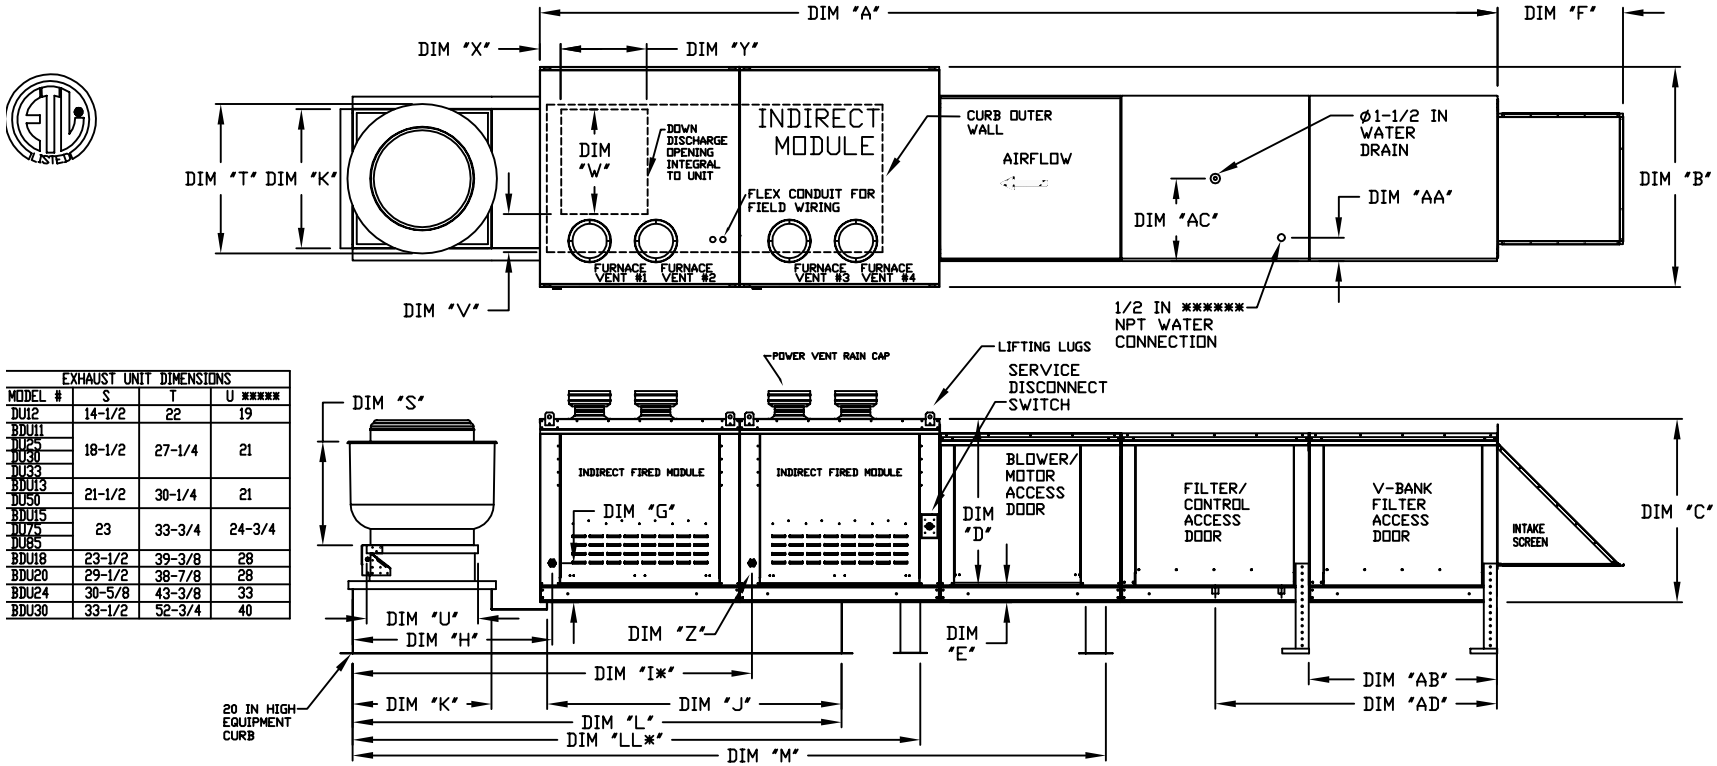

EXHAUST UNIT DIMENSIONS			
MODEL #	S	T	U *****
DU12	14-1/2	22	19
BDU11	18-1/2	27-1/4	21
DU25			
DU30			
DU33			
BDU13	21-1/2	30-1/4	21
DU50			
BDU15	23	33-3/4	24-3/4
DU75			
DU85			
BDU18	23-1/2	39-3/8	28
BDU20	29-1/2	38-7/8	28
BDU24	30-5/8	43-3/8	33
BDU30	33-1/2	52-3/4	40

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS														DOWN DISCHARGE OPENING				GAS CONNECTION	# OF FURNACES	WATER INLET		DRAIN OPENING	
	A	B	C	D	E	F	G	H	I*	J	K	L	LL*	M	V	W	X	Y	"Z" (NPT)		AA	AB	AC	AD
1-IBT.150-G10	156-3/4	49-1/2	39-9/16	35-13/16	3-3/4	22-3/8	8-3/4	36-1/8	N/A	71	21	106	N/A	124-3/16	3	16-3/4	3-1/8	21	3/4	1	4-1/2	38-1/2	13	48-1/4
1-IBT.200-G10	156-3/4	49-1/2	39-9/16	35-13/16	3-3/4	22-3/8	8-3/4	36-1/8	N/A	71	21	106	N/A	124-3/16	3	16-3/4	3-1/8	21	3/4	1	4-1/2	38-1/2	13	48-1/4
1-IBT.300-150-150-G10	156-3/4	49-1/2	39-9/16	35-13/16	3-3/4	22-3/8	8-3/4	36-1/8	N/A	71	21	106	N/A	124-3/16	3	16-3/4	3-1/8	21	3/4	2	4-1/2	38-1/2	13	48-1/4
1-IBT.400-200-200-G10	156-3/4	49-1/2	39-9/16	35-13/16	3-3/4	22-3/8	8-3/4	36-1/8	N/A	71	21	106	N/A	124-3/16	3	16-3/4	3-1/8	21	3/4	2	4-1/2	38-1/2	13	48-1/4
2-IBT.200-G15	164-3/4	49-1/2	39-9/16	35-13/16	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.300-G15	164-3/4	49-1/2	53-7/8	50-1/8	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.400-G15	164-3/4	49-1/2	53-7/8	50-1/8	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.400-200-200-G15	164-3/4	49-1/2	39-9/16	35-13/16	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
2-IBT.600-300-300-G15	164-3/4	49-1/2	53-7/8	50-1/8	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
2-IBT.800-400-400-G15	164-3/4	49-1/2	53-7/8	50-1/8	3-3/4	30-5/16	8-3/4	46-1/8	N/A	79	31	124	N/A	142-3/16	5	24	3-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
3-IBT.400-G18	181-3/4	57-3/4	57-1/16	51-13/16	5-1/4	34-3/16	10-3/4	50-1/8	N/A	84	35	133	N/A	151-3/16	6-3/4	26-1/2	4-1/8	26-1/2	1	1	4-1/2	44	20	57-1/4
3-IBT.600-300-300-G18	181-3/4	57-3/4	57-1/16	51-13/16	5-1/4	34-3/16	10-3/4	50-1/8	N/A	84	35	133	N/A	151-3/16	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	44	20	57-1/4
3-IBT.800-400-400-G18	181-3/4	57-3/4	57-1/16	51-13/16	5-1/4	34-3/16	10-3/4	50-1/8	N/A	84	35	133	N/A	151-3/16	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	44	20	57-1/4
3-IBT.1000-300-300-400-G18	241-7/8	57-3/4	57-1/16	51-13/16	5-1/4	34-3/16	10-3/4	50-1/8	110-1/4	84	35	133	166-1/16	211-5/16	6-3/4	26-1/2	4-1/8	26-1/2	1	3	4-1/2	44	20	57-1/4
3-IBT.1200-400-400-400-G18	241-7/8	57-3/4	57-1/16	51-13/16	5-1/4	34-3/16	10-3/4	50-1/8	110-1/4	84	35	133	166-1/16	211-5/16	6-3/4	26-1/2	4-1/8	26-1/2	1	3	4-1/2	44	20	57-1/4

* ADDITIONAL RAIL/GAS CONNECTION ONLY FOR UNITS WITH 3 OR 4 FURNACES

**ALL MODELS ARE FULLY ELECTRONICALLY MODULATING

*** COMBUSTION EFFICIENCY OF EVERY UNIT IS 80.0% OVER THE ENTIRE GAS FIRING RANGE.

**** GAS PRESSURES IN TABLE ARE FOR NATURAL GAS, LP MINIMUM GAS INLET PRESSURE = 11" W.C.

***** 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

****** MAX. EVAP WATER PRESSURE = 50 PSI @ 70 DEG. F

UNIT INFORMATION

MODEL	BTU RANGE (MBH)**			TURNDOWN	COMBUSTION	GAS PRESSURE****		STANDARD EVAPORATIVE COOLING UNIT					CELDEK EVAPORATIVE COOLING UNIT					V-BANK INFORMATION
	BURNER INPUT	BTU LOW	BTU HIGH	RATIO	EFFICIENCY***	MIN	MAX	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	FILTER SIZE & QTY
1-IBT.150-G10	150	20	120	6	80.0%	7" WC	14" WC	1022 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1027 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.200-G10	200	26.7	160	6	80.0%	7" WC	14" WC	1052 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1057 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.300-150-150-G10	300	20	240	12	80.0%	7" WC	14" WC	1107 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1112 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.400-200-200-G10	400	26.7	320	12	80.0%	7" WC	14" WC	1181 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1186 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
2-IBT.200-G15	200	26.7	160	6	80.0%	7" WC	14" WC	1305 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1300 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.300-G15	300	40	240	6	80.0%	7" WC	14" WC	1397 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1392 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.400-G15	400	53.3	320	6	80.0%	7" WC	14" WC	1476 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1471 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.400-200-200-G15	400	26.7	320	12	80.0%	7" WC	14" WC	1364 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1359 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.600-300-300-G15	600	40	480	12	80.0%	7" WC	14" WC	1518 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1513 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.800-400-400-G15	800	53.3	640	12	80.0%	7" WC	14" WC	1631 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1626 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
3-IBT.400-G18	400	53.3	320	6	80.0%	7" WC	14" WC	1837 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	1827 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.600-300-300-G18	600	40	480	12	80.0%	7" WC	14" WC	1955 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	1945 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.800-400-400-G18	800	53.3	640	12	80.0%	7" WC	14" WC	2093 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2083 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.1000-300-300-400-G18	1000	40	800	20	80.0%	7" WC	14" WC	2832 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2822 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.1200-400-400-400-G18	1200	53.3	960	18	80.0%	7" WC	14" WC	2844 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2834 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)