


MODULAR INDOOR INLINE BLOWER WITH HEATING COIL AND EVAPORATIVE COOLER INTAKE

REV#3 06/12/2015

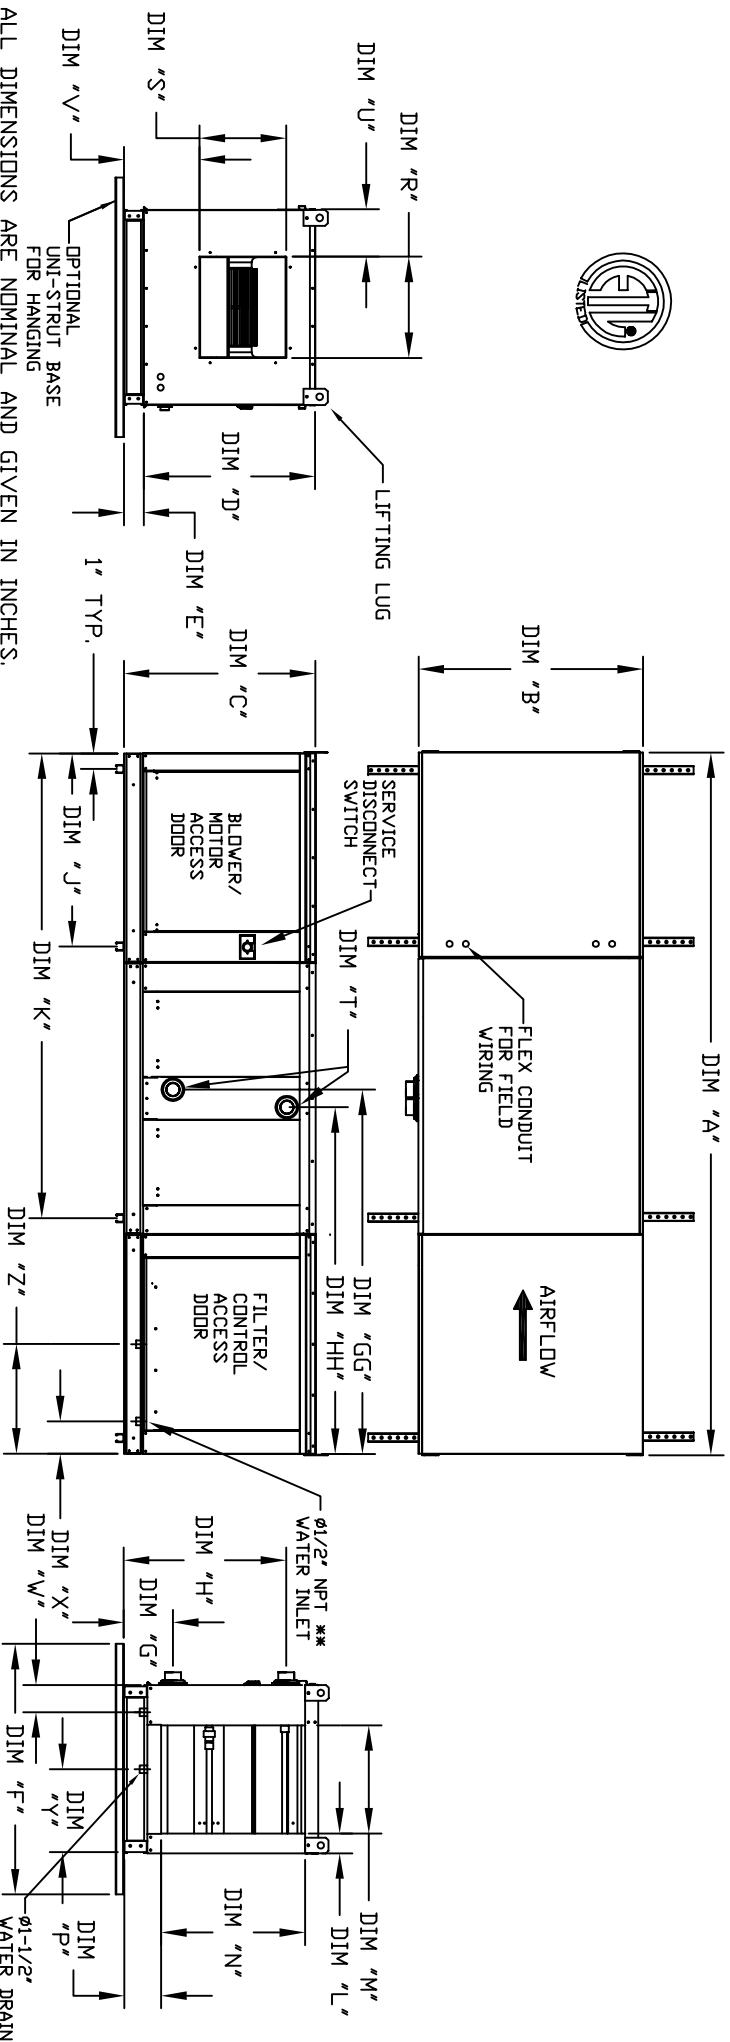

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS											INTAKE OPENING					DISCHARGE OPENING					WATER INLET DRAIN																				
	A	B	C	D	E	F	J	K	L	M	N	P	R	S	U	V	W	X	Y	Z																						
G10	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	36-31-1/8	73-1/4	3-1/8	16-3/4	21-7/8	5-3/4	13-1/4	11-1/2	6-3/8	11-7/8	4-1/2	6-1/4	13	16																							
G12	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	48-39-1/8	81-1/4	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16																							
G15	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	48-39-1/8	81-1/4	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16																							
G18	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	60-44-1/8	86-1/4	4-5/8	29-1/4	33-7/8	7-1/2	22	19	9	17-7/8	4-1/2	5-3/4	20	19																							
920	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	60-63-3/16	117-3/8	4-5/8	36-1/4	41-7/8	7-1/2	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	5-3/4	23-1/2	17-1/2																							
925	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	72-73-3/16	127-3/8	4-5/8	47	48-7/8	7-1/2	31-3/8	31-3/8	13-3/16	21-9/16	4-1/2	5-3/4	28-7/8	17-1/2																							

HOT WATER MODULE											STEAM COIL MODULE											STANDARD EVAPORATIVE COOLING UNIT W/											CELDEK EVAPORATIVE COOLING UNIT W/															
MODEL	TOT. CAPACITY (MBH)	PIPE CONNECTION (IPT)	G	GG	H	HH	MODEL	TOT. CAPACITY (MBH)	PIPE CONNECTION (IPT)	PST	G	GG	H	HH	MODEL	TOT. CAPACITY (MBH)	PIPE CONNECTION (IPT)	PST	G	GG	H	HH	MODEL	TOT. CAPACITY (MBH)	PIPE CONNECTION (IPT)	PST	G	GG	H	HH	MODEL	TOT. CAPACITY (MBH)	PIPE CONNECTION (IPT)	PST	G	GG	H	HH										
G10	165.63	2	8-1/4	52-7/16	24-3/4	49-11/16	G10	176.49	2-1/2	5	8-3/4	51-1/16	16-15/16	51-1/16	G10	500	20"x24"x12"	5	8-3/4	51-1/16	1050	12	G10	495	20"x25"x2"	6	406	FPM	6	3	GPH	G10	500	20"x24"x12"	5	8-3/4	51-1/16	1050	12	G10	495	20"x25"x2"	6	406	FPM	6	3	GPH
G12	320.88	2	8-1/4	52-7/16	28-3/4	49-11/16	G12	328.19	2-1/2	5	8-3/4	51-1/16	18-3/8	51-1/16	G12	750	25"x32"x12"	5	8-3/4	51-1/16	1080	20	G12	750	25"x32"x12"	10	358	FPM	10	5	GPH	G12	750	25"x32"x12"	5	8-3/4	51-1/16	1080	20	G12	750	25"x32"x12"	10	358	FPM	10	5	GPH
G15	320.88	2	8-1/4	52-7/16	28-3/4	49-11/16	G15	328.19	2-1/2	5	8-3/4	51-1/16	18-3/8	51-1/16	G15	750	25"x32"x12"	5	8-3/4	51-1/16	1080	20	G15	750	25"x32"x12"	10	358	FPM	10	5	GPH	G15	750	25"x32"x12"	5	8-3/4	51-1/16	1080	20	G15	750	25"x32"x12"	10	358	FPM	10	5	GPH
G18	514.97	1-1/2	9-1/2	58-3/16	38	55-15/16	G18	505.64	2-1/2	5	10-1/4	57-1/16	23-5/8	57-1/16	G18	920	30"x36"x12"	5	10-1/4	57-1/16	1067	28	G18	935	30"x35"x12"	8	348	FPM	8	7	GPH	G18	920	30"x36"x12"	5	10-1/4	57-1/16	1067	28	G18	935	30"x35"x12"	8	348	FPM	8	7	GPH
920	831.87	2-1/2	10	61-11/16	45-1/2	58-11/16	920	812.24	2-1/2	5	10-1/4	60-7/32	28-5/8	60-7/32	920	1470	20"x25"x2"	5	10-1/4	60-7/32	1322	35	920	1500	20"x25"x2"	14	572	FPM	14	7	GPH	920	1470	20"x25"x2"	5	10-1/4	60-7/32	1322	35	920	1500	20"x25"x2"	14	572	FPM	14	7	GPH
925	1230.16	3	10-1/4	61-5/16	52-1/4	58-7/16	925	1234.45	2-1/2	5	10-1/4	60-7/32	31-3/4	60-7/32	925	1995	20"x25"x2"	5	10-1/4	60-7/32	1304	42	925	2035	20"x25"x2"	30	638	FPM	30	15	GPH	925	1995	20"x25"x2"	5	10-1/4	60-7/32	1304	42	925	2035	20"x25"x2"	30	638	FPM	30	15	GPH

MAX. FLOW RATE (GPH) = (TOT. CAPACITY / 60) \* 1.48