


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH EVAPORATIVE COOLER AND INTAKE HOOD

REV. #4 10/21/20

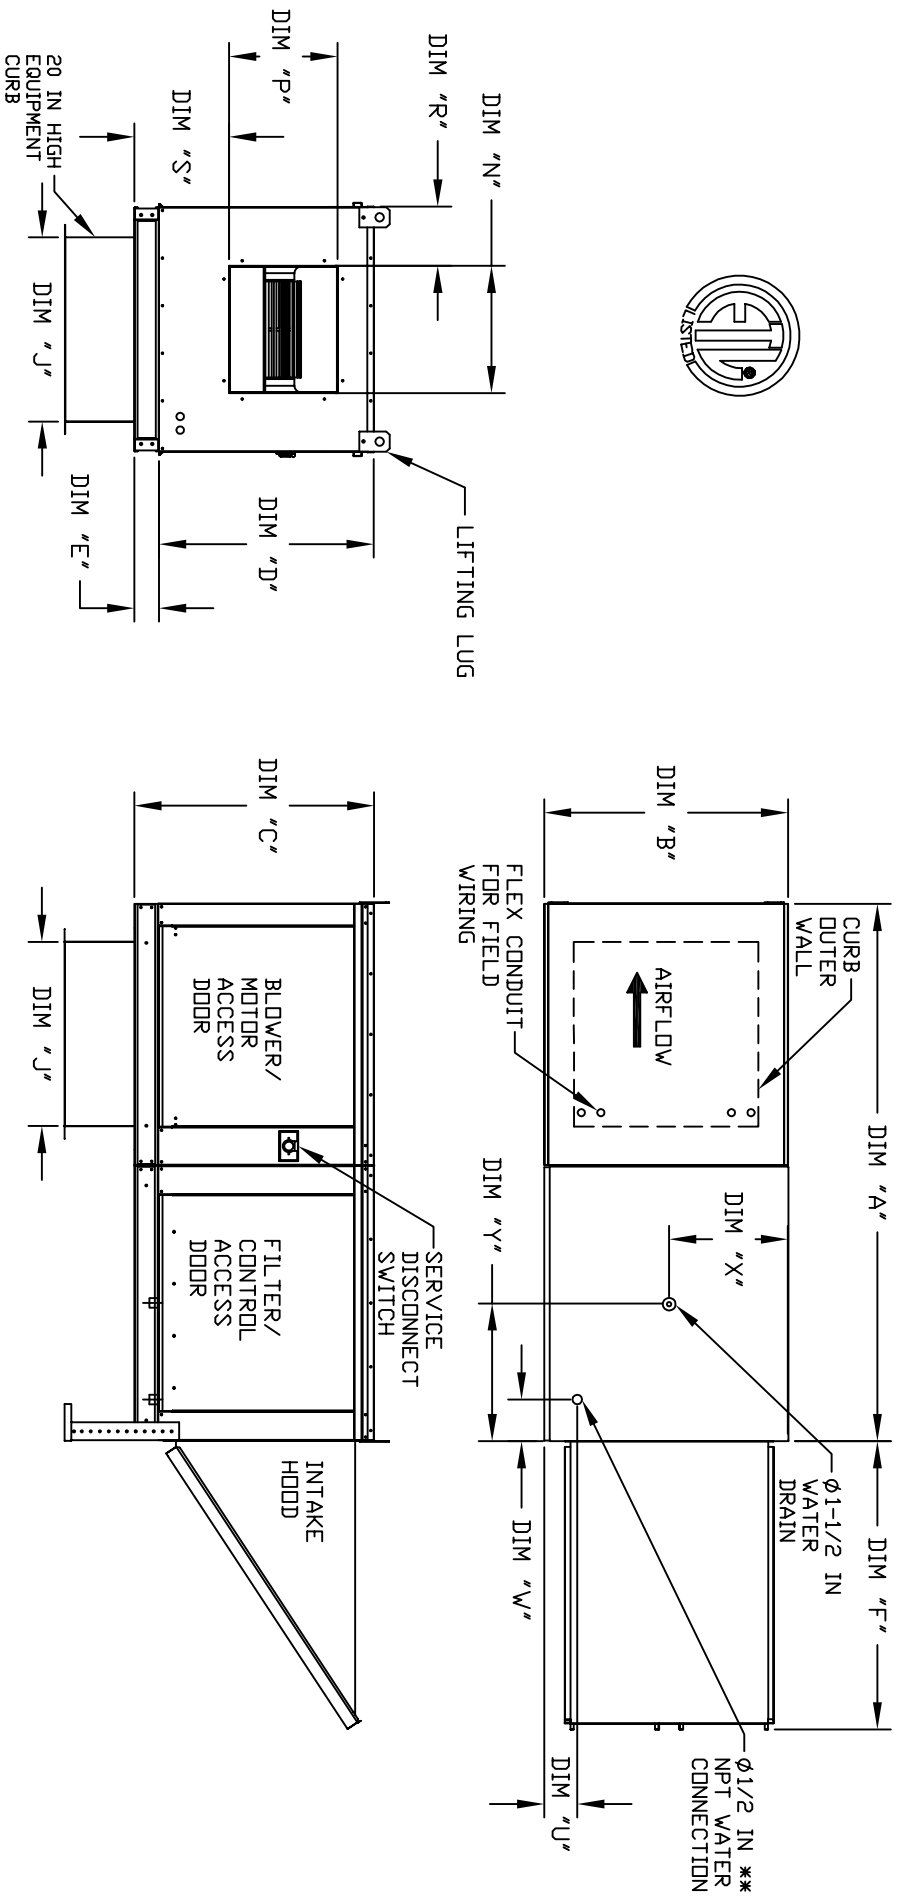

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS										DISCHARGE OPENING						WATER INLET						DRAIN OPENING					
	A	B	C	D	E	F	J	N	P	R	S	U	W	X	Y	R	S	U	W	X	Y	R	S	U	W	X	Y	
G10	64-3/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	13-1/4	11-1/2	6-3/8	11-7/8	4-1/2	6-1/4	13	16	9	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		
G12	72-3/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16	10	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		
G15	72-3/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	18-3/4	16	8-5/8	14-1/16	4-1/2	6-1/4	18	16	10	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		
G18	83-3/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	22	19	9	17-7/8	4-1/2	5-3/4	20	19	10	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		
G20	99-9/16	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	5-3/4	20	19	10	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		
G25	109-9/16	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	42	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	5-3/4	20	19	10	17-7/8	4-1/2	5-3/4	20	19	17-1/8	4-1/2	5-3/4	23-1/2	17-1/2		

UNIT INFORMATION

MODEL	FILTER SIZE & QTY		MAX. FILTER VELOCITY	STANDARD EVAPORATIVE COOLING UNIT						CELDEK EVAPORATIVE COOLING UNIT					
	TOT. WEIGHT	MEDIA SIZE & QTY		VEL.	Ø MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL.	Ø MAX. CFM	NOZZLES	MAX. FLOW RATE		
G10	16"x20"x2" (3)	Ø3500 CFM = 667 FPM	380 LBS	20"x25"x2" (3)	406 FPM	6	3	GPH	385 LBS	20"x24"x12"	1050 FPM	12	3.9	GPH	
G12	20"x25"x2" (3)	Ø5000 CFM = 580 FPM	590 LBS	16"x20"x2" (8)	358 FPM	10	5	GPH	590 LBS	25"x32"x12"	900 FPM	20	6.5	GPH	
G15	20"x25"x2" (3)	Ø6000 CFM = 696 FPM	605 LBS	16"x20"x2" (8)	429 FPM	10	5	GPH	600 LBS	25"x32"x12"	1080 FPM	20	6.5	GPH	
G18	16"x20"x2" (6)	Ø8000 CFM = 762 FPM	765 LBS	20"x25"x2" (8)	348 FPM	14	7	GPH	755 LBS	30"x36"x12"	1067 FPM	28	8.4	GPH	
G20	16"x20"x2" (10)	Ø15000 CFM = 857 FPM	1275 LBS	16"x20"x2" (15)	572 FPM	24	12	GPH	1245 LBS	38"x43"x12"	1322 FPM	35	10.15	GPH	
G25	20"x25"x2" (8)	Ø22000 CFM = 957 FPM	1735 LBS	20"x25"x2" (12)	638 FPM	20	15	GPH	1695 LBS	45"x54"x12"	1304 FPM	42	12.6	GPH	