




MODULAR OUTDOOR DOWN DISCHARGE BLOWER-ROOF TOP PACKAGE WITH V-BANK FILTER, COOLING COIL AND SCREEN INTAKE

STLV/RC0348RT
REV.#3 6/2/2009

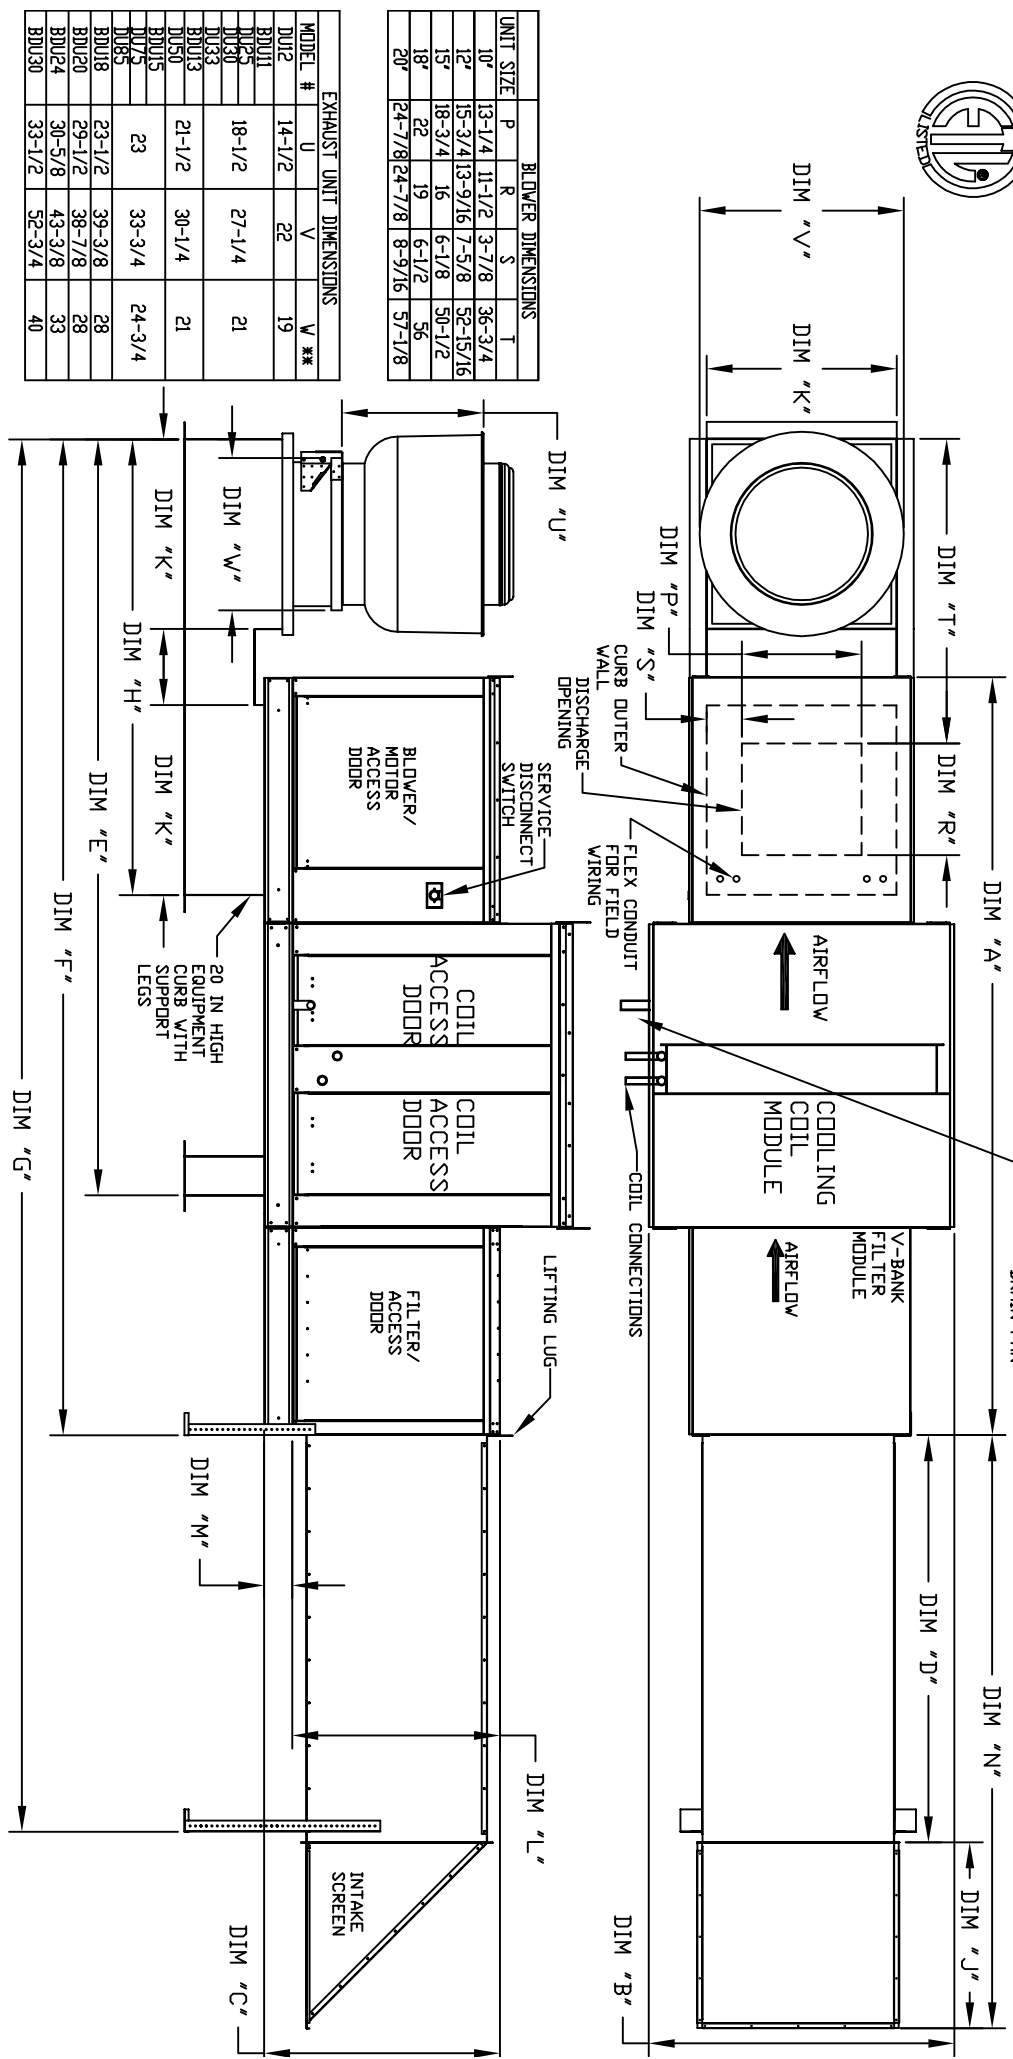

EXHAUST UNIT DIMENSIONS

UNIT SIZE	P	R	S	T
10"	13-1/4	11-1/2	3-7/8	36-3/4
12"	15-3/4	13-9/16	7-5/8	52-13/16
15"	18-3/4	16	6-1/8	50-1/2
18"	22	19	6-1/2	56
20"	24-7/8	24-1/8	8-9/16	57-1/8

EXHAUST UNIT DIMENSIONS

MODEL #	U	V	W**
DU12	14-1/2	22	19
BU11	18-1/2	27-1/4	21
DU25	21-1/2	30-1/4	21
DU30	23	33-3/4	24-3/4
DU33	23-1/2	33-3/8	28
DU35	29-1/2	38-7/8	28
DU38	30-5/8	43-3/8	33
DU40	33-1/2	52-3/4	40

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES

MODEL	SUPPLY UNIT DIMENSIONS										CURB AND RAIL DIMENSIONS										UNIT INFORMATION										TONNAGE RANGE	
	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	T	U	Filter Size & Qty	Max. Filter Velocity	Min.	Max.								
G10	1040	LBS	106-5/8	39-3/8	42-3/4	88	100-3/16	136	221-15/16	56	22-3/8	39	3-3/4	110-3/8	20"x25"x2"	(3)	6350	CFM = 406	3	12.5	3	10n										
G12	1330	LBS	114-5/8	49-3/8	47-3/4	119-5/8	155	232-15/16	76	108-5/16	44	3-3/4	110-5/16	16"x20"x2"	(8)	6500	CFM = 358	5	20	5	20	10n										
G15	1340	LBS	114-5/8	49-3/8	47-3/4	119-5/8	155	232-15/16	76	108-5/16	44	3-3/4	110-5/16	16"x20"x2"	(8)	6600	CFM = 429	5	20	5	20	10n										
G18	1350	LBS	123-5/8	54-3/8	56-3/8	128-3/16	169-1/2	242-7/16	84	134-3/8	51-1/8	5-1/4	109-3/16	20"x25"x2"	(8)	8800	CFM = 348	10	25	10	25	10n										
G20	1650	LBS	153-7/16	64-3/8	64-3/8	160-9/16	219-1/2	316-1/2	114	164-1/4	61-1/4	5-7/8	114-1/4	16"x20"x2"	(15)	15000	CFM = 572	20	40	20	40	10n										

ROOF OPENING 2" SMALLER THAN CURB DIMENSION