


MODULAR OUTDOOR DOWN DISCHARGE BLOWER WITH V-BANK, EVAPORATIVE COOLER AND INTAKE HOOD

REV. #0  
10/21/20  
HYPERDRA

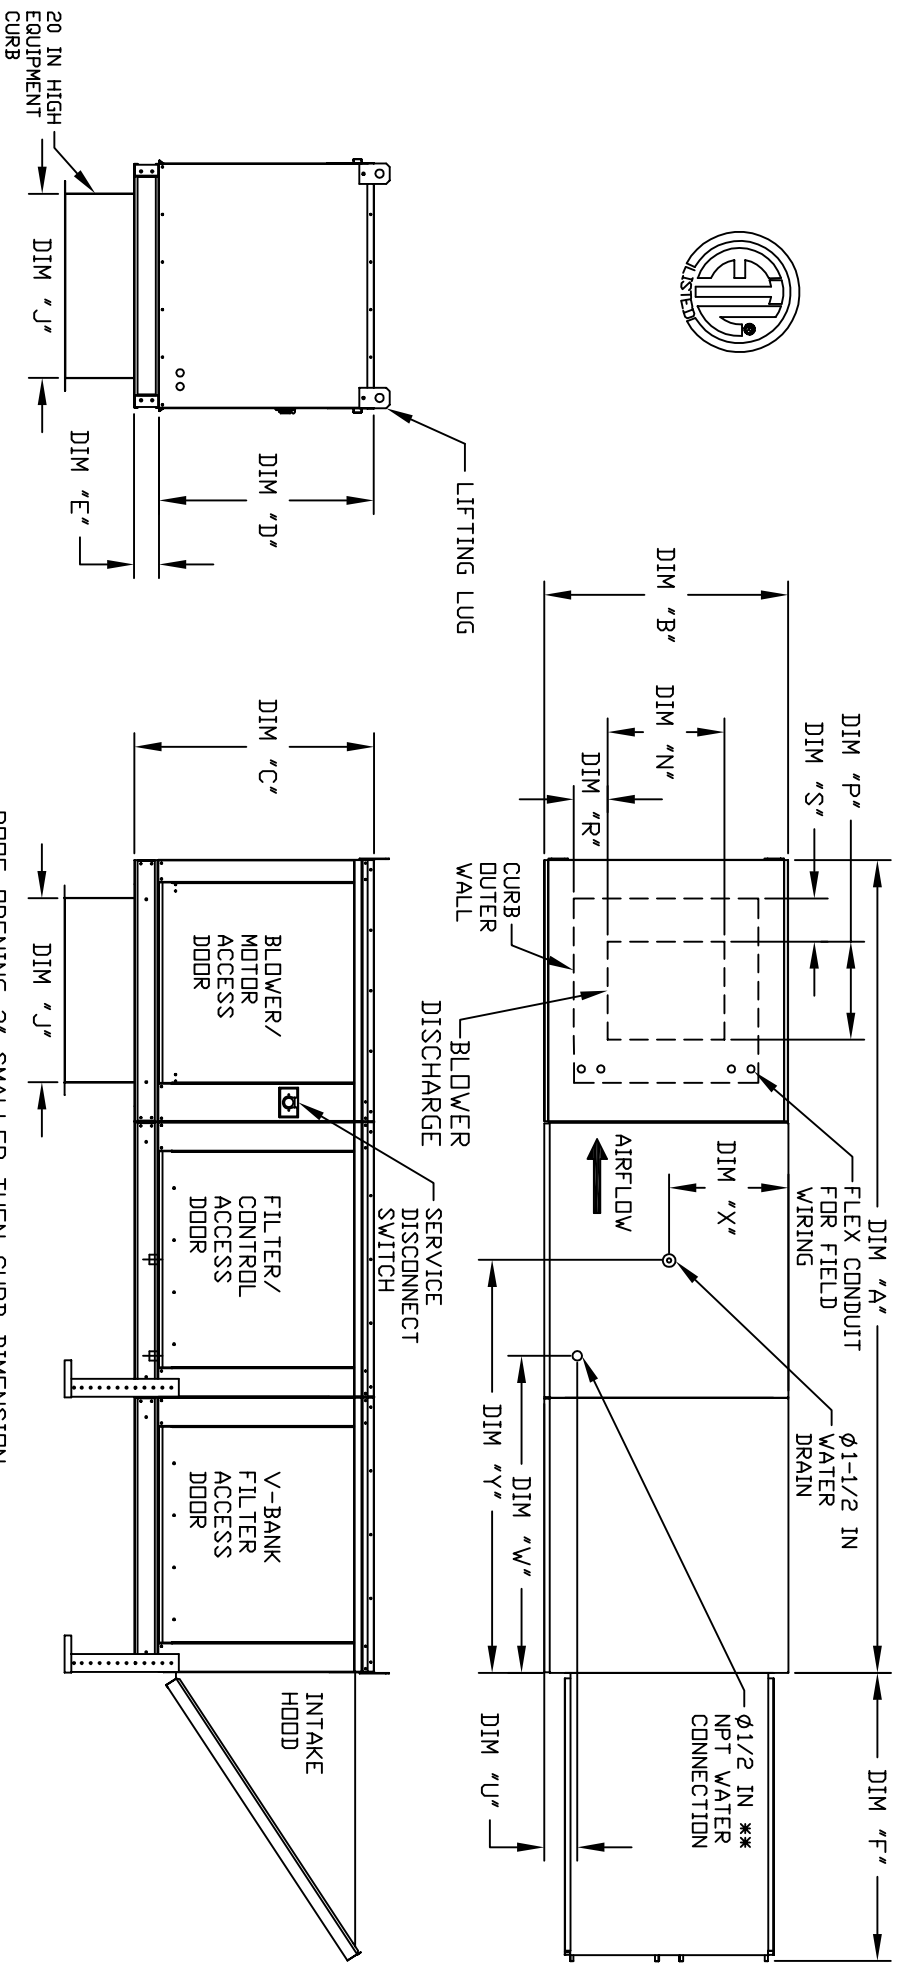

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

ROOF OPENING 2" SMALLER THEN CURB DIMENSION

| MODEL | UNIT DIMENSIONS |         |        |         |       |        |    |        |         |          |         | DISCHARGE OPENING |        |        |        |       | WATER INLET |        |        |       |        | DRAIN OPENING |        |       |        |        | V-BANK FILTER |  |  |  |  |
|-------|-----------------|---------|--------|---------|-------|--------|----|--------|---------|----------|---------|-------------------|--------|--------|--------|-------|-------------|--------|--------|-------|--------|---------------|--------|-------|--------|--------|---------------|--|--|--|--|
|       | A               | B       | C      | D       | E     | F      | J  | N      | P       | R        | S       | U                 | W      | X      | Y      | U     | W           | X      | Y      | U     | W      | X             | Y      | U     | W      | X      | Y             |  |  |  |  |
| G10   | 96-5/8          | 27-3/8  | 29-3/4 | 26-1/16 | 3-3/4 | 44-3/8 | 21 | 13-1/4 | 11-1/2  | 3-7/8    | 1-3/4   | 4-1/2             | 38-1/2 | 13     | 48-1/4 | 4-1/2 | 38-1/2      | 18     | 48-1/4 | 4-1/2 | 38-1/2 | 18            | 48-1/4 | 4-1/2 | 38-1/2 | 18     | 48-1/4        |  |  |  |  |
| G12   | 104-5/8         | 37-3/8  | 36-3/4 | 33-1/16 | 3-3/4 | 53-5/8 | 31 | 15-3/4 | 13-9/16 | 7-5/8    | 7-15/16 | 4-1/2             | 38-1/2 | 18     | 48-1/4 | 4-1/2 | 38-1/2      | 18     | 48-1/4 | 4-1/2 | 38-1/2 | 18            | 48-1/4 | 4-1/2 | 38-1/2 | 18     | 48-1/4        |  |  |  |  |
| G15   | 104-5/8         | 37-3/8  | 36-3/4 | 33-1/16 | 3-3/4 | 53-5/8 | 31 | 18-3/4 | 16      | 6-1/8    | 5-1/2   | 4-1/2             | 38-1/2 | 18     | 48-1/4 | 4-1/2 | 38-1/2      | 18     | 48-1/4 | 4-1/2 | 38-1/2 | 18            | 48-1/4 | 4-1/2 | 38-1/2 | 18     | 48-1/4        |  |  |  |  |
| G18   | 121-5/8         | 41-3/8  | 43-3/8 | 38-1/16 | 5-1/4 | 51-5/8 | 35 | 22     | 19      | 6-1/2    | 7       | 4-1/2             | 44     | 20     | 57-1/4 | 4-1/2 | 44          | 20     | 57-1/4 | 4-1/2 | 44     | 20            | 57-1/4 | 4-1/2 | 44     | 20     | 57-1/4        |  |  |  |  |
| 920   | 134-15/16       | 48-7/16 | 51-3/8 | 46-1/8  | 5-1/4 | 76-3/8 | 42 | 24-7/8 | 24-7/8  | 8-9/16   | 1-1/8   | 4-1/2             | 41-1/8 | 23-1/2 | 52-7/8 | 4-1/2 | 41-1/8      | 23-1/2 | 52-7/8 | 4-1/2 | 41-1/8 | 23-1/2        | 52-7/8 | 4-1/2 | 41-1/8 | 23-1/2 | 52-7/8        |  |  |  |  |
| 925   | 144-15/16       | 59-3/16 | 58-3/8 | 53-1/8  | 5-1/4 | 71-3/8 | 42 | 31-3/8 | 31-3/8  | 10-11/16 | 3-13/16 | 4-1/2             | 41-1/8 | 28-7/8 | 52-7/8 | 4-1/2 | 41-1/8      | 28-7/8 | 52-7/8 | 4-1/2 | 41-1/8 | 28-7/8        | 52-7/8 | 4-1/2 | 41-1/8 | 28-7/8 | 52-7/8        |  |  |  |  |

UNIT INFORMATION

| MODEL | FILTER SIZE & QTY | MAX. FILTER VELOCITY | STANDARD EVAPORATIVE COOLING UNIT |                  |                 |          |         | CELDEK EVAPORATIVE COOLING UNIT |             |                  |      |          |             |                |     |    |       |     |
|-------|-------------------|----------------------|-----------------------------------|------------------|-----------------|----------|---------|---------------------------------|-------------|------------------|------|----------|-------------|----------------|-----|----|-------|-----|
|       |                   |                      | TOT. WEIGHT                       | MEDIA SIZE & QTY | VEL.            | MAX. CFM | NOZZLES | MAX. FLOW RATE                  | TOT. WEIGHT | MEDIA SIZE & QTY | VEL. | MAX. CFM | NOZZLES     | MAX. FLOW RATE |     |    |       |     |
| G10   | 16"x20"x2" (3)    | @3500 CFM = 667 FPM  | 475                               | LBS              | 20"x25"x2" (3)  | 406      | FPM     | 6                               | 3           | GPH              | 480  | LBS      | 20"x24"x12" | 1050           | FPM | 12 | 3.9   | GPH |
| G12   | 20"x25"x2" (3)    | @5000 CFM = 580 FPM  | 730                               | LBS              | 16"x20"x2" (8)  | 358      | FPM     | 10                              | 5           | GPH              | 725  | LBS      | 25"x32"x12" | 900            | FPM | 20 | 6.5   | GPH |
| G15   | 20"x25"x2" (3)    | @6000 CFM = 696 FPM  | 740                               | LBS              | 16"x20"x2" (8)  | 429      | FPM     | 10                              | 5           | GPH              | 735  | LBS      | 25"x32"x12" | 1080           | FPM | 20 | 6.5   | GPH |
| G18   | 16"x20"x2" (6)    | @8000 CFM = 762 FPM  | 930                               | LBS              | 20"x25"x2" (8)  | 348      | FPM     | 14                              | 7           | GPH              | 920  | LBS      | 30"x36"x12" | 1067           | FPM | 28 | 8.4   | GPH |
| 920   | 16"x20"x2" (10)   | @15000 CFM = 857 FPM | 1510                              | LBS              | 16"x20"x2" (15) | 572      | FPM     | 24                              | 12          | GPH              | 1480 | LBS      | 38"x43"x12" | 1322           | FPM | 35 | 10.15 | GPH |
| 925   | 20"x25"x2" (8)    | @22000 CFM = 957 FPM | 2030                              | LBS              | 20"x25"x2" (12) | 638      | FPM     | 26                              | 15          | GPH              | 1990 | LBS      | 45"x54"x12" | 1304           | FPM | 42 | 12.6  | GPH |