


MODULAR OUTDOOR DOWN DISCHARGE BLOWER WITH V-BANK, HEATING COIL, EVAPORATIVE COOLER AND INTAKE HOOD

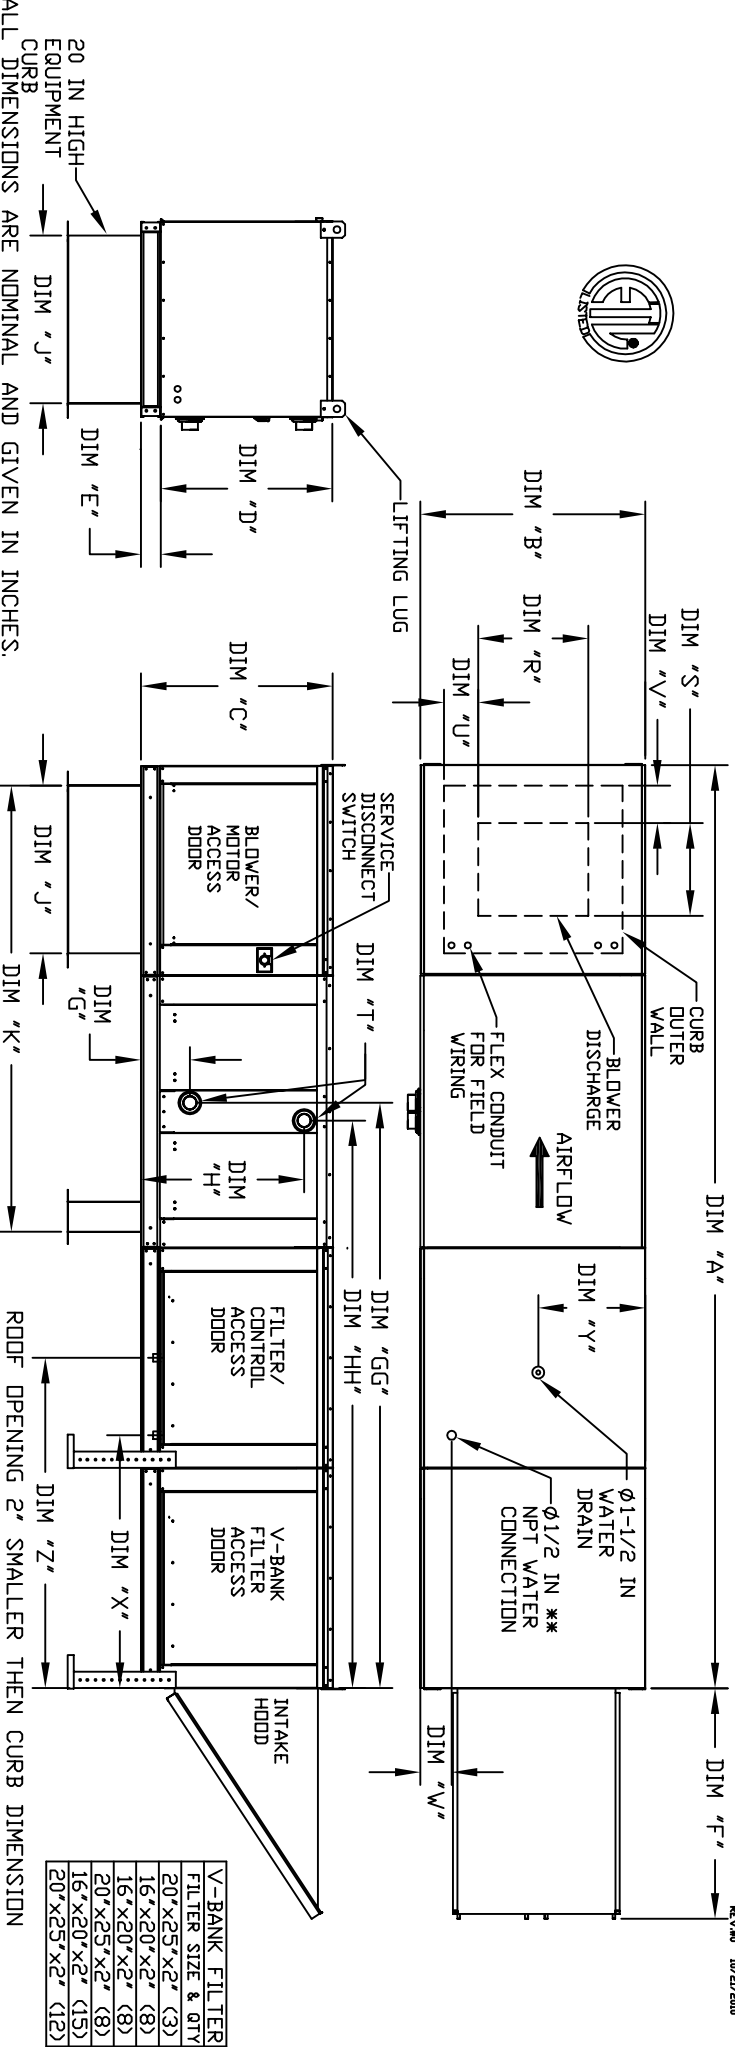

V-BANK FILTER FILTER SIZE & QTY

16"x20"x2" (8)
20"x25"x2" (3)
16"x20"x2" (8)
20"x25"x2" (8)
16"x25"x2" (15)
20"x25"x2" (12)

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

ROOF OPENING 2" SMALLER THEN CURB DIMENSION

UNIT DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
G10	138-7/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	65-13/16	13-1/4	11-1/2	3-7/8	1-3/4	4-1/2	38-1/2	13	48-1/4	16"x20"x2" (3)	3500	CFM	=	667	FPM				
G12	146-7/8	37-3/8	36-3/4	33-1/16	3-3/4	45-5/8	31	74-5/8	15-3/4	13-9/16	7-5/8	4-1/2	4-1/2	38-1/2	18	48-1/4	20"x25"x2" (3)	5000	CFM	=	580	FPM				
G15	146-7/8	37-3/8	36-3/4	33-1/16	3-3/4	45-5/8	31	74-5/8	18-3/4	18-3/4	5-1/2	4-1/2	4-1/2	38-1/2	18	48-1/4	20"x25"x2" (3)	6000	CFM	=	696	FPM				
G18	163-7/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	79-3/16	22	19	6-1/2	7	4-1/2	44	20	57-1/4	16"x20"x2" (6)	8000	CFM	=	762	FPM				
920	189-1/4	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	104-9/32	24-7/8	24-7/8	8-9/16	1-1/8	4-1/2	41-1/8	23-1/2	52-7/8	16"x20"x2" (10)	15000	CFM	=	857	FPM				
925	199-1/4	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52	111-1/4	21-3/2	31-3/8	10-11/16	13-1/16	4-1/2	41-1/8	28-7/8	52-7/8	20"x25"x2" (8)	22000	CFM	=	957	FPM				

HOT WATER MODULE

MODEL	TOTAL CAPACITY (GPH)	PIPE CONNECTION	TOTAL CAPACITY (GPH)	PIPE CONNECTION
G10	165.63	2"	8-1/4	84-11/16
G12	320.88	2"	8-1/4	84-11/16
G15	320.88	2"	8-1/4	84-11/16
G18	514.97	1-1/2"	9-1/2	96-7/16
920	831.87	2-1/2"	10	97-1/16
925	1230.16	3"	10-1/4	96-11/16

STEAM COIL MODULE

MODEL	TOTAL CAPACITY (GPH)	PIPE CONNECTION	STEAM PSI	G	GG	H	HH
G10	176.49	2-1/2"	5	8-3/4	83-5/16	16-15/16	83-5/16
G12	328.19	2-1/2"	5	8-3/4	83-5/16	18-3/8	83-5/16
G15	328.19	2-1/2"	5	8-3/4	83-5/16	18-3/8	83-5/16
G18	505.64	2-1/2"	5	10-1/4	95-5/16	23-5/8	95-5/16
920	812.24	2-1/2"	5	10-1/4	95-5/8	28-5/8	95-5/8
925	1234.45	2-1/2"	5	10-1/4	95-5/8	31-3/4	95-5/8

STANDARD EVAPORATIVE COOLING UNIT W/

MODEL	TOT. WEIGHT (LBS)	MEDIA SIZE & QTY	VEL. (FPM)	MAX. CFM	NOZZLES	MAX. FLOW RATE (GPH)
G10	635	20"x25"x2" (3)	406	FPM	6	3 GPH
G12	950	16"x20"x2" (8)	358	FPM	10	5 GPH
G15	960	16"x20"x2" (8)	429	FPM	10	5 GPH
G18	1190	20"x25"x2" (8)	348	FPM	14	7 GPH
920	1945	19x20x25x2" (15)	572	FPM	24	12 GPH
925	2555	20x25x2" (12)	638	FPM	30	15 GPH

CELDEK EVAPORATIVE COOLING UNIT W/

MODEL	TOT. WEIGHT (LBS)	MEDIA SIZE & QTY	VEL. (FPM)	MAX. CFM	NOZZLES	MAX. FLOW RATE (GPH)
G10	640	20"x24"x12" (3)	1050	FPM	12	3.9 GPH
G12	945	25"x32"x12" (8)	900	FPM	20	6.5 GPH
G15	955	25"x32"x12" (8)	1080	FPM	20	6.5 GPH
G18	1180	30"x36"x12" (12)	1067	FPM	28	8.4 GPH
920	1915	30"x36"x12" (12)	1322	FPM	35	10.15 GPH
925	2515	45"x54"x12" (12)	1304	FPM	42	12.6 GPH