


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH V-BANK, EVAPORATIVE COOLER AND INTAKE HOOD

REV. #0
10/21/20
HVHCSA

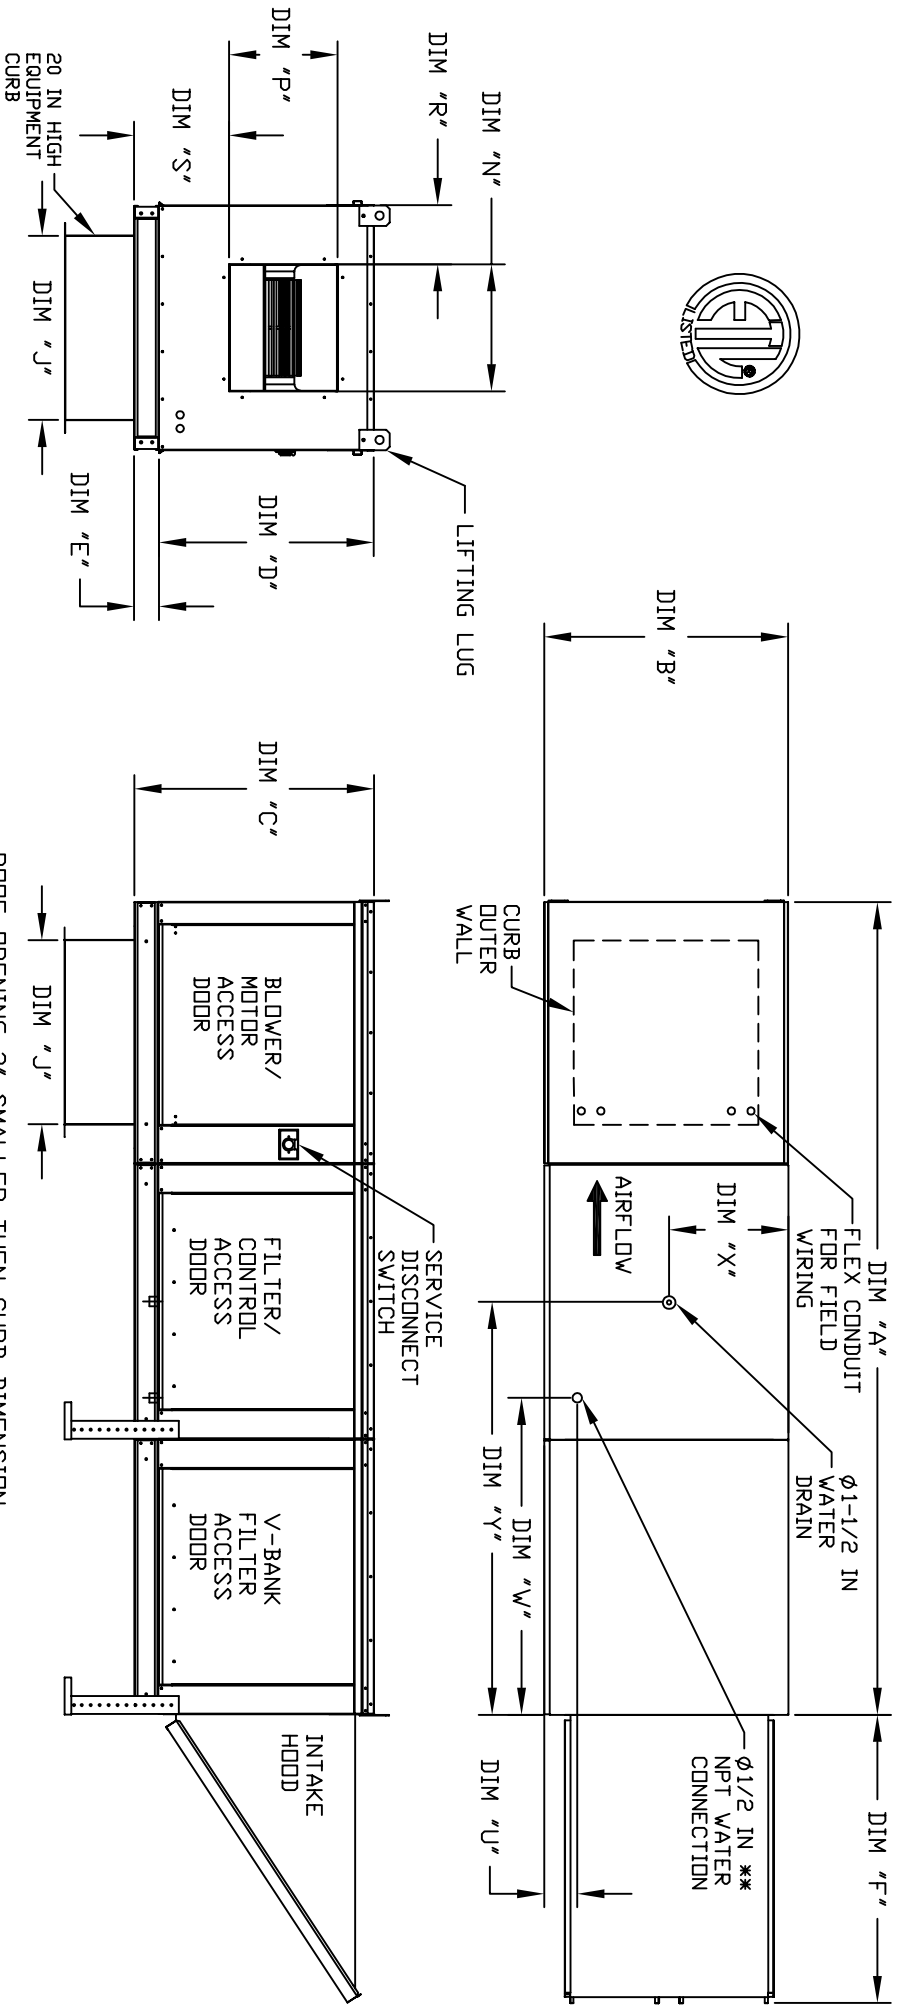

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

ROOF OPENING 2" SMALLER THEN CURB DIMENSION

MODEL	UNIT DIMENSIONS											DISCHARGE OPENING					WATER INLET					DRAIN OPENING					V-BANK FILTER				
	A	B	C	D	E	F	J	N	P	R	S	U	W	X	Y	U	W	X	Y	U	W	X	Y	U	W	X	Y				
G10	96-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	13-1/4	11-1/2	6-3/8	11-7/8	4-1/2	38-1/2	13	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4				
G12	104-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4				
G15	104-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	18-3/4	16	8-5/8	14-1/16	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4	4-1/2	38-1/2	18	48-1/4				
G18	121-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	22	19	9	17-7/8	4-1/2	44	20	57-1/4	4-1/2	44	20	57-1/4	4-1/2	44	20	57-1/4	4-1/2	44	20	57-1/4				
G20	134-15/16	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	41-1/8	23-1/2	52-7/8	4-1/2	41-1/8	23-1/2	52-7/8	4-1/2	41-1/8	23-1/2	52-7/8	4-1/2	41-1/8	23-1/2	52-7/8				
G25	144-15/16	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	42	24-7/8	24-7/8	13-3/8	21-9/16	4-1/2	41-1/8	28-7/8	52-7/8	4-1/2	41-1/8	28-7/8	52-7/8	4-1/2	41-1/8	28-7/8	52-7/8	4-1/2	41-1/8	28-7/8	52-7/8				

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY	STANDARD EVAPORATIVE COOLING UNIT					CELDEK EVAPORATIVE COOLING UNIT										
			TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE						
G10	16"x20"x2" (3)	@3500 CFM = 667 FPM	475	LBS	20"x25"x2" (3)	406	FPM	6	3	GPH	480	LBS	20"x24"x12"	1050	FPM	12	3.9	GPH
G12	20"x25"x2" (3)	@5000 CFM = 580 FPM	730	LBS	16"x20"x2" (8)	358	FPM	10	5	GPH	725	LBS	25"x32"x12"	900	FPM	20	6.5	GPH
G15	20"x25"x2" (3)	@6000 CFM = 696 FPM	740	LBS	16"x20"x2" (8)	429	FPM	10	5	GPH	735	LBS	25"x32"x12"	1080	FPM	20	6.5	GPH
G18	16"x20"x2" (6)	@8000 CFM = 762 FPM	930	LBS	20"x25"x2" (8)	348	FPM	14	7	GPH	920	LBS	30"x36"x12"	1067	FPM	28	8.4	GPH
G20	16"x20"x2" (10)	@15000 CFM = 857 FPM	1510	LBS	16"x20"x2" (15)	572	FPM	24	12	GPH	1480	LBS	38"x43"x12"	1322	FPM	35	10.15	GPH
G25	20"x25"x2" (8)	@22000 CFM = 957 FPM	2030	LBS	20"x25"x2" (12)	638	FPM	26	15	GPH	1990	LBS	45"x54"x12"	1304	FPM	42	12.6	GPH