


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, EVAPORATIVE COOLER AND INTAKE HOOD

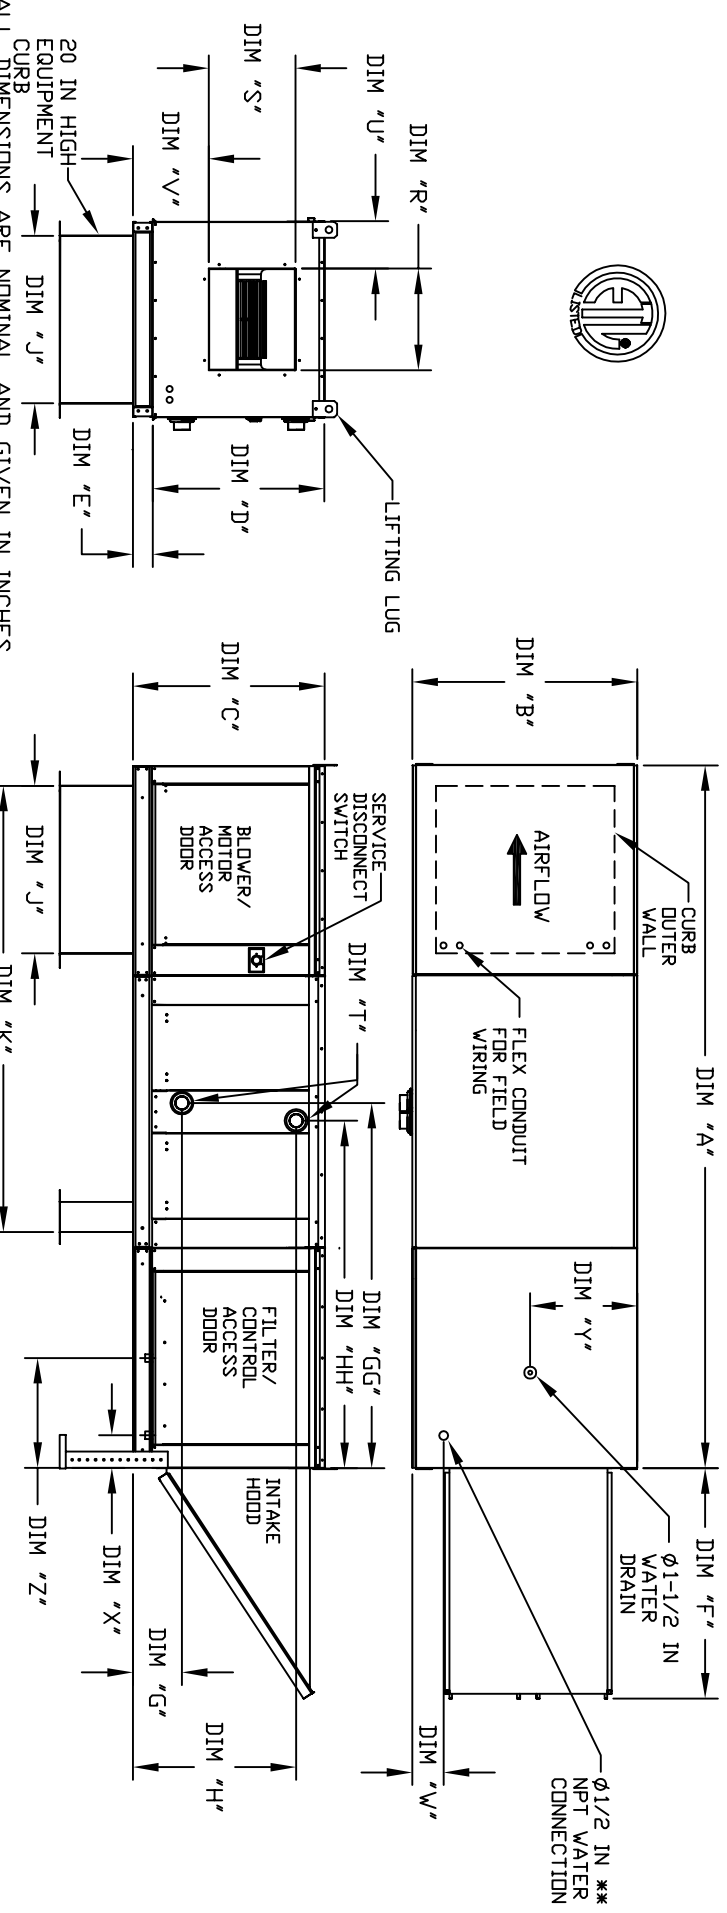

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS											DISCHARGE OPENING											WATER INLET DRAIN OPENING											UNIT INFORMATION										
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Filter Size & Qty	Max Filter Velocity																
G10	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	71	13	1/4	11-1/2	6-3/8	11-7/8	4-1/2	6-1/4	13	16	16"	20"x25"x2" (3)	667 FPM																								
G12	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	45-5/8	31	79	15	3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16	20"	25"x2" (3)	580 FPM																								
G15	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	45-5/8	31	79	18	3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16	20"	25"x2" (3)	600 FPM																								
G18	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	84	22	2	17-7/8	4-1/2	5-3/4	20	19	16"	20"x2" (6)	800 FPM																										
920	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	115	3/16	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	5-3/4	23-1/2	17-1/2	16"	20"x2" (10)	1500 CFM = 857 FPM																								
925	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52	125	3/4	125-3/16	31-3/8	13-3/8	21-9/16	4-1/2	5-3/4	28-7/8	17-1/2	20"	25"x2" (8)	2200 CFM = 957 FPM																								

HOT WATER MODULE				STEAM COIL MODULE				STANDARD EVAPORATIVE COOLING UNIT W/				CELDEK EVAPORATIVE COOLING UNIT W/			
MODEL	TOT. CAPACITY	PIPE CONNECTION	STEAM	MODEL	TOT. CAPACITY	PIPE CONNECTION	STEAM	MODEL	TOT. CAPACITY	PIPE CONNECTION	STEAM	MODEL	TOT. CAPACITY	PIPE CONNECTION	STEAM
G10	165.63	2"	8-1/4	G10	176.49	2-1/2	5	G10	540	20"x25"x2" (3)	6	G10	540	20"x25"x2" (3)	6
G12	320.88	2"	8-1/4	G12	328.19	2-1/2	5	G12	810	20"x25"x2" (8)	10	G12	810	20"x25"x2" (8)	10
G15	320.88	2"	8-1/4	G15	328.19	2-1/2	5	G15	820	20"x25"x2" (8)	10	G15	820	20"x25"x2" (8)	10
G18	514.97	2-1/2	9-1/2	G18	505.64	2-1/2	5	G18	1015	20"x25"x2" (8)	14	G18	1015	20"x25"x2" (8)	14
920	831.87	3	10-1/4	920	812.24	2-1/2	5	920	1680	20"x25"x2" (15)	24	920	1680	20"x25"x2" (15)	24
925	1230.16	3	10-1/4	925	1234.45	2-1/2	5	925	2220	20"x25"x2" (12)	30	925	2220	20"x25"x2" (12)	30

MAX. FLOW RATE: 3.9 GPH (G10), 6.5 GPH (G12), 6.5 GPH (G15), 8.4 GPH (G18), 10.15 GPH (920), 12.6 GPH (925)