


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, V-BANK AND INTAKE HOOD

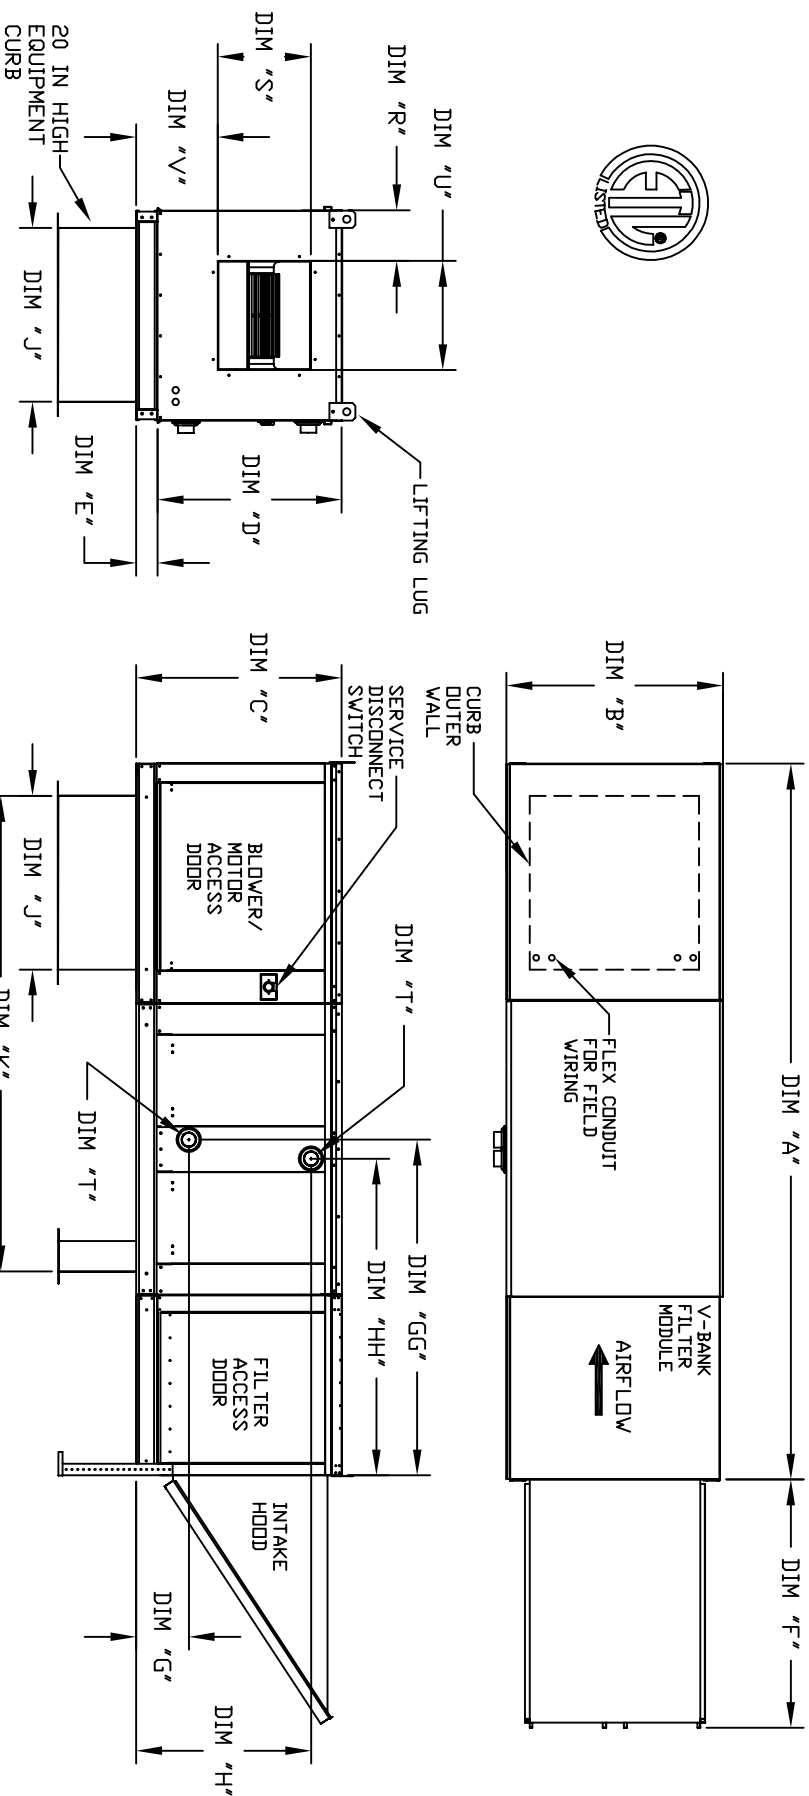

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS													DISCHARGE OPENING												
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V				
G10	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	71	6-3/8	11-1/2	13	1/4	11-7/8	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	71	6-3/8	11-1/2	13	1/4	11-7/8
G12	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	10-1/8	13-9/16	15-3/4	13-1/16	13-1/16	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	10-1/8	13-9/16	15-3/4	13-1/16	13-1/16
G15	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	8-5/8	16	18-3/4	14-1/16	14-1/16	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	8-5/8	16	18-3/4	14-1/16	14-1/16
G18	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	84	9	19	22	17-7/8	17-7/8	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	84	9	19	22	17-7/8	17-7/8
920	153-7/8	48-3/8	51-3/8	46-1/8	5-1/4	76-3/8	42	115-3/16	11-1/16	24-7/8	24-7/8	19-1/8	19-1/8	153-7/8	48-3/8	51-3/8	46-1/8	5-1/4	76-3/8	42	115-3/16	11-1/16	24-7/8	24-7/8	19-1/8	19-1/8
925	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52-3/4	125-3/16	13-3/16	31-3/8	31-3/8	21-9/16	21-9/16	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52-3/4	125-3/16	13-3/16	31-3/8	31-3/8	21-9/16	21-9/16

HOT WATER COIL MODULE

MODEL	WEIGHT (LBS)	TOTAL CAPACITY (GPH)	PIPE CONNECTION
G10	505	165.63	2
G12	770	320.88	2
G15	780	320.88	2
G18	950	514.97	2-1/2
920	1615	831.87	2-1/2
925	2150	1230.16	3

STEAM COIL MODULE

MODEL	WEIGHT (LBS)	TOTAL CAPACITY (GPH)	PIPE CONNECTION	STEAM PSI	G	GG	H	HH
G10	505	176.49	2-1/2	5	8-3/4	53-5/16	16-15/16	53-5/16
G12	770	328.19	2-1/2	5	8-3/4	53-5/16	18-3/8	53-5/16
G15	780	328.19	2-1/2	5	8-3/4	53-5/16	18-3/8	53-5/16
G18	945	505.64	2-1/2	5	10-1/4	59-5/16	23-5/8	59-5/16
920	1590	812.24	2-1/2	5	10-1/4	62-15/32	28-5/8	62-15/32
925	2145	1234.45	2-1/2	5	10-1/4	62-15/32	31-3/4	62-15/32

V-BANK FILTER

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY
G10	20"x25"x2" (3)	@3500 CFM = 406 FPM
G12	16"x20"x2" (8)	@5000 CFM = 358 FPM
G15	16"x20"x2" (8)	@6000 CFM = 429 FPM
G18	20"x25"x2" (8)	@8000 CFM = 348 FPM
920	16"x20"x2" (15)	@15000 CFM = 572 FPM
925	20"x25"x2" (12)	@22000 CFM = 638 FPM