
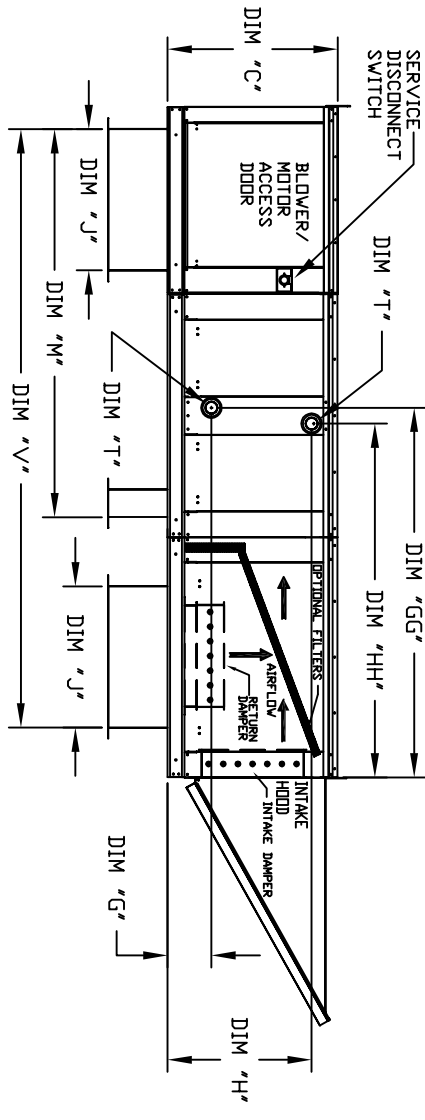
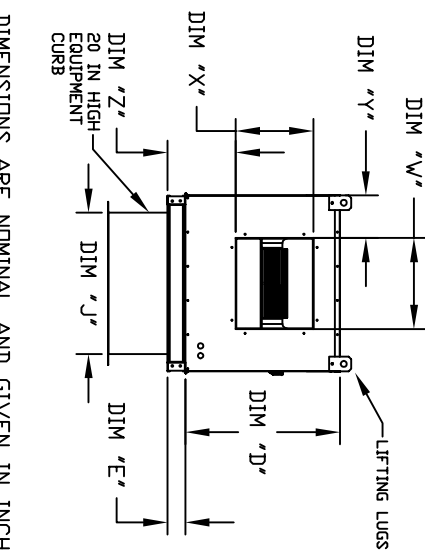


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, INTAKE HOOD AND MIXING BOX

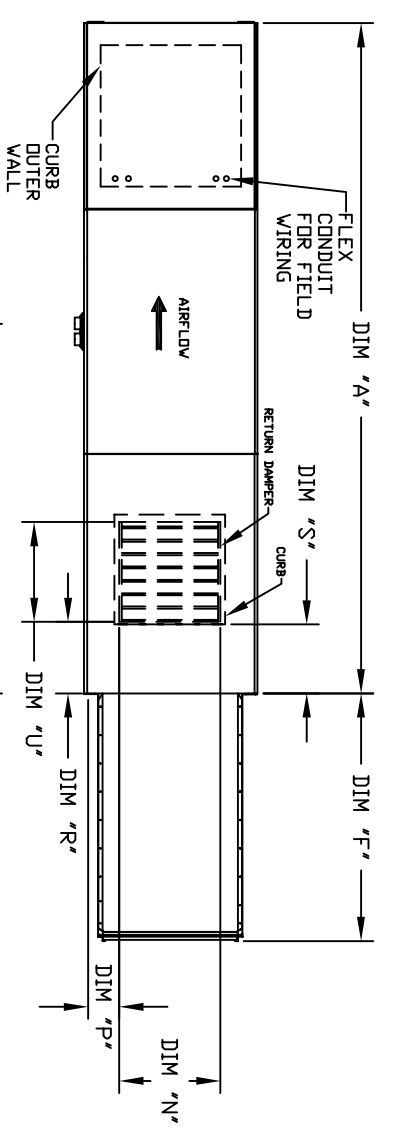

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT SIZE	UNIT DIMENSIONS												BELT DRIVE DISCHARGE OPENING												DIRECT DRIVE DISCHARGE OPENING											
	A	B	C	D	E	F	G	GG	H	HH	P	R	S	U	V	W	X	Y	Z	V	X	Y	Z													
1	116-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	8-1/4	64-11/16	28-3/4	46-15/16	14	14	12-1/2	18	98-5/8	13-1/4	11-1/2	6-3/8	11-7/8	17-1/4	15-1/2	4-3/8	8-15/16													
2**	124-5/8	37-3/8	36-3/4	63-1/16	3-3/4	53-5/8	8-1/4	64-11/16	28-3/4	46-15/16	11	11	7-1/2	24	112-9/16	15-3/4	13-9/16	10-1/8	13-1/16	N/A	N/A	N/A	N/A													
2	124-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	8-1/4	64-11/16	28-3/4	46-15/16	11	11	7-1/2	24	112-9/16	15-3/4	13-9/16	10-1/8	13-1/16	24-3/4	22	5-5/8	10-15/16													
3	129-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	9-1/2	64-7/16	38	62-3/16	8	7	4-1/2	30	120-1/8	22	19	9	17-7/8	28	25	6-1/16	14-15/16													
4	172-13/16	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	10	82-7/8	45-1/2	79-7/8	10	11	8	36	153-15/16	24-7/8	24-7/8	11-1/16	19-1/8	30	30	8-9/16	16-5/8													
5	182-13/16	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	10	83-1/8	52-3/4	113-3/16	43	10	6-1/2	43	170-7/8	31-3/8	31-3/8	13-3/16	21-9/16	35-3/8	35-3/8	11-1/4	19-10/16													

UNIT SIZE	TOTAL CAPACITY			PIPE CONNECTION			STEAM				
	(MBH)	(MPH)	(MPD)	G	GG	H	HH	G	GG	H	HH
1	565	LBS	176.49	2-1/2	5	8-3/4	63-5/16	16-15/16	63-5/16	5	5/16
2**	850	LBS	328.19	2-1/2	5	8-3/4	63-5/16	18-3/8	63-5/16	5	5/16
2	860	LBS	328.19	2-1/2	5	8-3/4	63-5/16	18-3/8	63-5/16	5	5/16
3	1065	LBS	505.64	2-1/2	5	10-1/4	63-5/16	23-5/8	63-5/16	5	5/16
4	1820	LBS	812.24	2-1/2	5	10-1/4	81-13/32	28-5/8	81-13/32	5	5/16
5	2425	LBS	1234.45	2-1/2	5	10-1/4	81-13/32	31-3/4	81-13/32	5	5/16

UNIT SIZE	UNIT INFORMATION			OPTIONAL MIXING BOX FILTERS		
	FILTER SIZE & QTY	MAX. FILTER VELOCITY	OPTIONAL MIXING BOX FILTERS	FILTER SIZE & QTY	OPTIONAL MIXING BOX FILTERS	OPTIONAL MIXING BOX FILTERS
1	16"x20"x2" (3)	@3500 CFM = 667 FPM	10"x16"x2" (3)	10"x16"x2" (3)	10"x16"x2" (3)	10"x16"x2" (3)
2**	20"x25"x2" (3)	@5000 CFM = 580 FPM	15"x25"x2" (2)	15"x25"x2" (2)	15"x25"x2" (2)	15"x25"x2" (2)
2	20"x25"x2" (3)	@6000 CFM = 696 FPM	16"x25"x2" (2)	16"x25"x2" (2)	16"x25"x2" (2)	16"x25"x2" (2)
3	16"x20"x2" (6)	@8000 CFM = 762 FPM	15"x20"x2" (4)	15"x20"x2" (4)	15"x20"x2" (4)	15"x20"x2" (4)
4	16"x20"x2" (10)	@15000 CFM = 857 FPM	18"x25"x2" (4)	18"x25"x2" (4)	18"x25"x2" (4)	18"x25"x2" (4)
5	20"x25"x2" (8)	@22000 CFM = 957 FPM	14.5"x19"x2" (12)	14.5"x19"x2" (12)	14.5"x19"x2" (12)	14.5"x19"x2" (12)

\*\* DIMENSIONS APPLY TO UNITS WITH G12 BLOWERS ONLY  
 MAY DIFFER FROM THE G12 CURB WITH G12 BLOWERS ONLY