


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH LPD EVAPORATIVE COOLER AND COOLING COIL

LPDCCSSAH
REV#5 01/13/2012

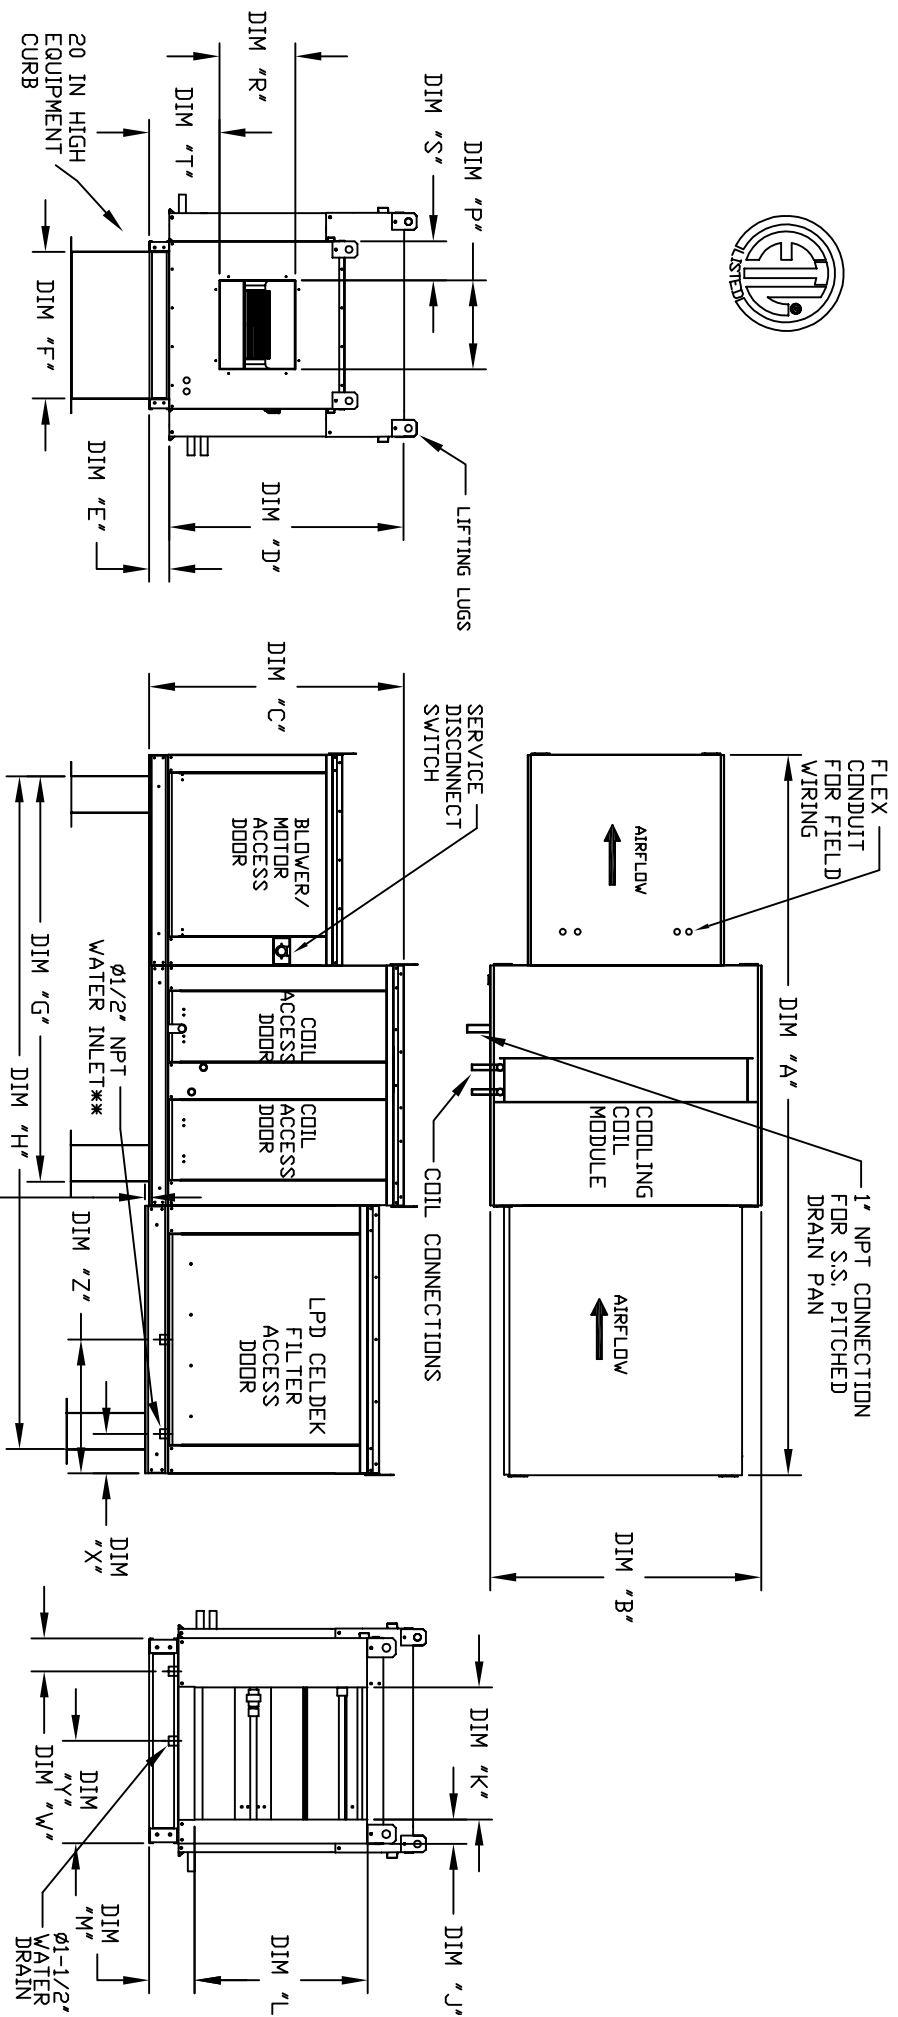

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	WEIGHT	UNIT DIMENSIONS												INTAKE OPENING												DISCHARGE OPENING												TONNAGE RANGE	
		A	B	C	D	E	F	G	H	J	K	L	M	P	R	S	T	MIN	MAX																				
G10	735 LBS	106-5/8	39-3/8	42-3/4	39-1/8	3-3/4	21	71	103-1/2	5-1/8	24-3/4	28-7/8	5-3/4	13-1/4	11-1/2	6-3/8	11-7/8	3	12.5																				
G12	1010 LBS	120-5/8	49-3/8	47-3/4	44	3-3/4	31	79	117-1/4	4-5/8	29-1/4	33-7/8	7-1/2	15-3/4	13-9/16	10-1/8	13-1/16	5	20																				
G15	1020 LBS	120-5/8	49-3/8	47-3/4	44	3-3/4	31	79	117-1/4	4-5/8	29-1/4	33-7/8	7-1/2	15-3/4	13-9/16	10-1/8	13-1/16	5	20																				
G18	1240 LBS	122-3/4	54-1/2	56-3/8	51-1/8	5-1/4	35	84	119-3/8	4-5/8	36-1/4	41-7/8	7-1/2	22	19	9	17-7/8	10	25																				
920	1880 LBS	153-7/8	60-1/2	64-3/8	59-1/8	5-1/4	42	115-3/16	150-9/16	4-5/8	47	48-7/8	7-1/2	24-7/8	24-7/8	24-7/8	11-1/16	19	40																				
925	2510 LBS	163-7/8	79-1/2	88-1/2	63-3/16	5-1/4	52-3/4	125-3/16	160-9/16	4-5/8	63-1/4	48-7/8	7-1/2	31-3/8	31-3/8	31-3/8	13-3/16	30	50																				

MODEL	CELDEK EVAPORATIVE COOLING UNIT		WATER INLET	DRAIN OPENING
	MEDIA SIZE & QTY	NOZZLES MAX. FLOW RATE		
G10	25"x32"x12"	20	6.5 GPH	4-1/2
G12	30"x36"x12"	28	8.4 GPH	4-1/2
G15	30"x36"x12"	28	8.4 GPH	4-1/2
G18	38"x43"x12"	35	10.15 GPH	4-1/2
920	45"x54"x12"	42	12.6 GPH	4-1/2
925	45"x72"x12"	57	21.1 GPH	4-1/2