




MODULAR INDOOR SIDE DISCHARGE BLOWER WITH LPD EVAPORATIVE COOLER INTAKE

LPDCCSMH  
REV. MS 09/13/2016

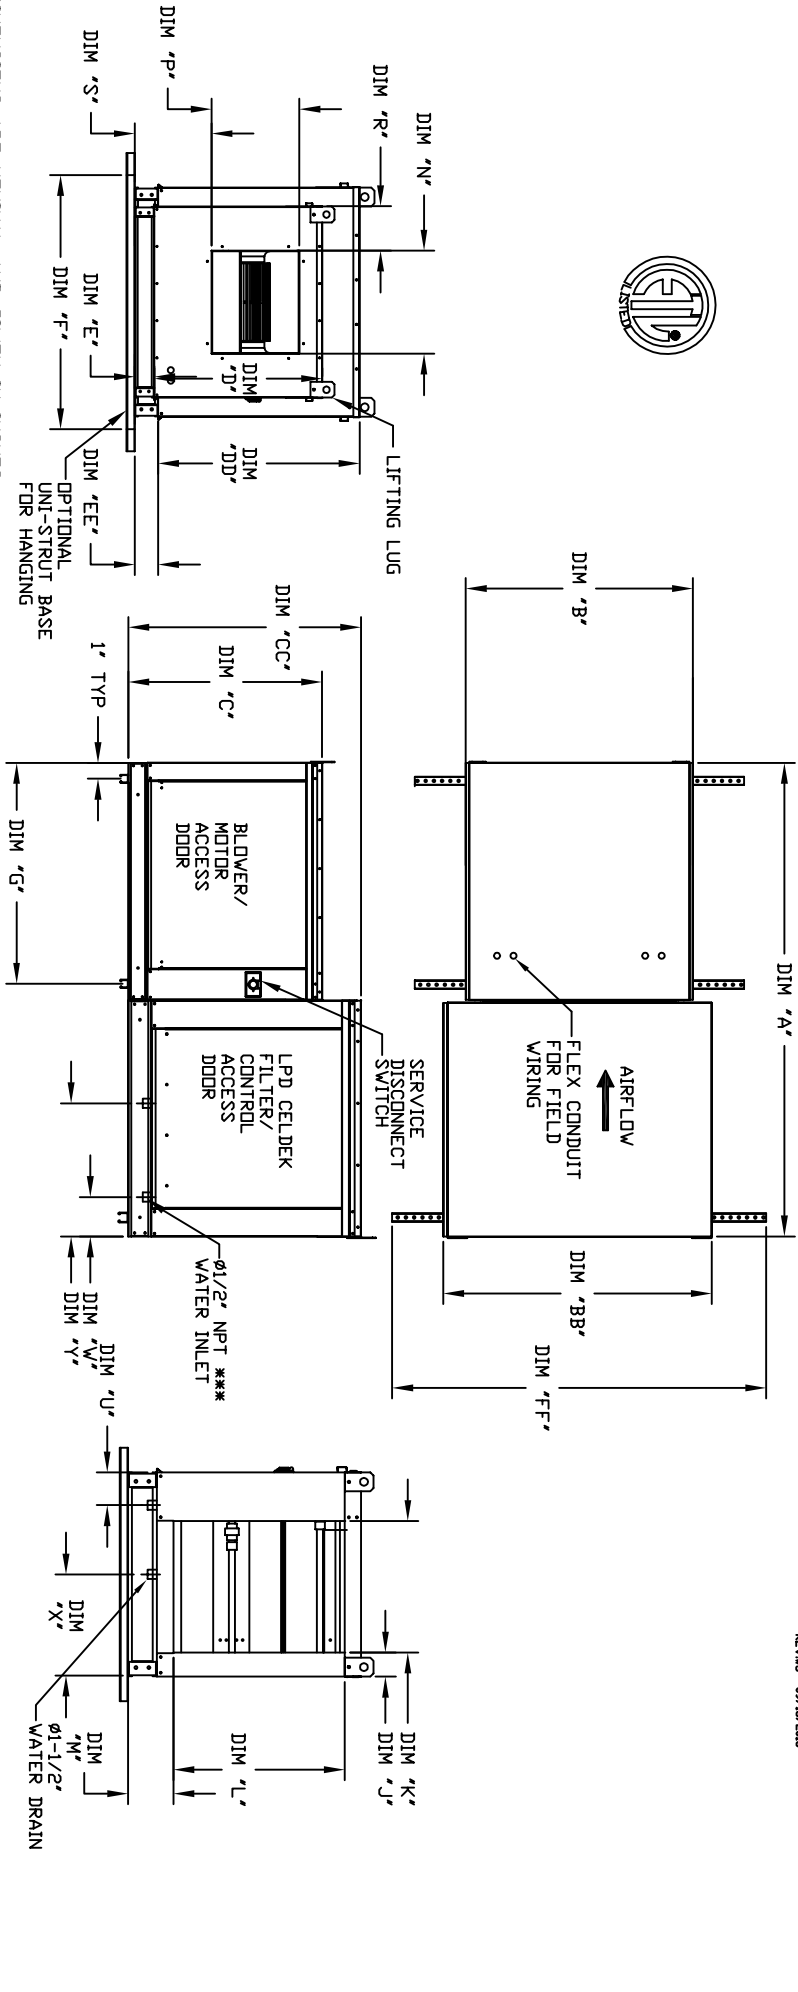

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT SIZE	UNIT DIMENSIONS												INTAKE OPENING												BELT DRIVE DISCHARGE OPENING												DIRECT DRIVE DISCHARGE OPENING												WATER INLET/DRAIN											
	A	B	BB	C	CC	D	DD	E	EE	F	FF	G	J	K	L	M	N	P	R	S	N	P	R	S	U	V	X	Y																																
1	64-1/4	27-3/8	36-3/4	29-3/4	36-3/4	42-1/2	16-3/8	3-3/4	3-3/4	43/6	48	31-1/8	5-1/8	24-3/4	48-7/8	5-3/4	13	1/4	11-1/2	6-3/8	11-7/8	17-1/4	15-1/2	4-3/8	8-15/16	4-1/2	5-1/4	18	16																															
2**	78-1/4	37-3/8	40-3/4	36-3/4	44-3/8	50-1/8	18-1/8	5-1/4	5-1/4	43/8	60	39-1/8	4-5/8	29-1/4	58-1/8	7-1/2	15-3/4	13-9/16	10-1/8	13-1/16	N/A	N/A	N/A	N/A	N/A	4-1/2	5-3/4	20	19																															
2	78-1/4	37-3/8	40-3/4	36-3/4	44-3/8	50-1/8	18-1/8	5-1/4	5-1/4	43/8	60	39-1/8	4-5/8	29-1/4	58-1/8	7-1/2	15-3/4	13-9/16	10-1/8	13-1/16	N/A	N/A	N/A	N/A	N/A	4-1/2	5-3/4	20	19																															
3	80-3/8	41-3/8	47-7/8	38-3/8	46-1/2	53-1/2	20-1/8	5-1/4	5-1/4	43/8	60	44-1/8	4-5/8	36-1/4	64-1/8	7-1/2	18-3/4	16	8-5/8	14-1/16	24-3/4	22	5-5/8	10-15/16	4-1/2	5-3/4	20	19																																
4	99-7/16	48-7/16	58-5/8	51-3/8	58-3/8	66-1/8	24-1/8	5-1/4	5-1/4	43/8	72	63-3/16	4-5/8	47	48-7/8	7-1/2	24-7/8	19	9	17-7/8	30	25	6-1/16	14-15/16	4-1/2	5-3/4	23-1/2	17-1/2																																

UNIT INFORMATION

UNIT SIZE	LPD CELDEK EVAPORATIVE COOLING UNIT					
	TOT WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	
1	380 LBS	25"x32"x12"	630 FPM	20	6.5 GPH	
2**	580 LBS	30"x36"x12"	667 FPM	28	8.4 GPH	
2	590 LBS	30"x36"x12"	800 FPM	28	8.4 GPH	
3	735 LBS	38"x43"x12"	705 FPM	35	10.15 GPH	
4	1100 LBS	45"x54"x12"	889 FPM	42	12.6 GPH	

\*\* DIMENSIONS APPLY TO UNITS WITH G12 BLOWERS ONLY  
\*\*\* DIMENSIONS APPLY TO UNITS WITH G12 BLOWERS ONLY