


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, EVAPORATIVE COOLER AND SCREEN INTAKE

STRECSM
REV. 4/9 10/21/2010

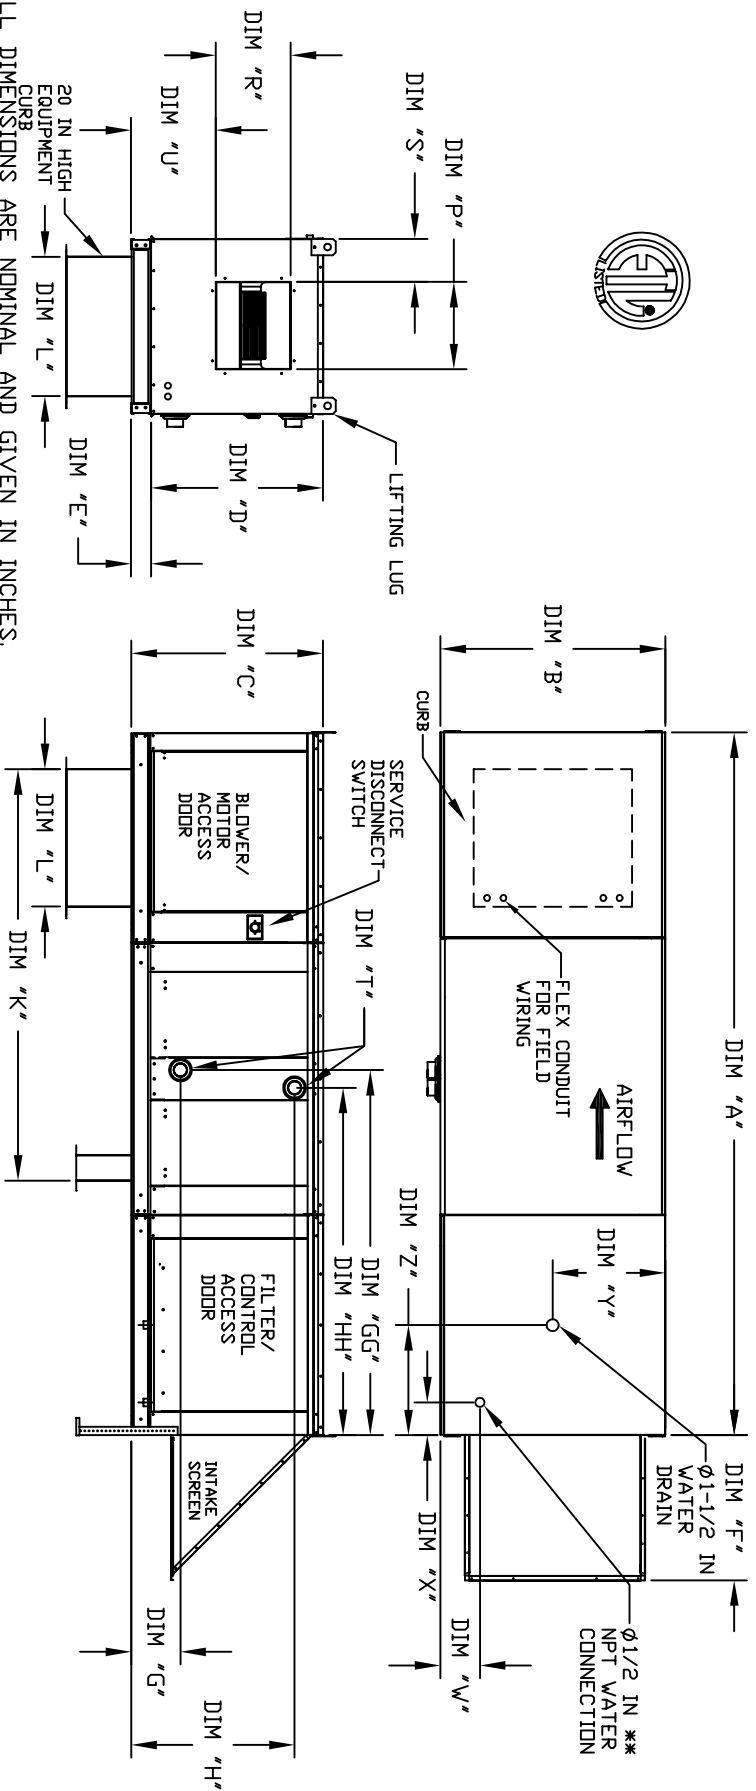

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS										DISCHARGE OPENING										WATER INLET DRAIN OPENING															
	A	B	C	D	E	F	G	H	K	L	P	R	S	U	W	X	Y	Z																		
G10	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	22-3/8	71	21	13 1/4	11-1/2	6-3/8	11-7/8	4-1/2	6-1/4	13	16	16																			
G12	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	79	31	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	6-1/4	18	16	16																			
G15	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	79	31	18-3/4	16	8-5/8	14-1/16	4-1/2	6-1/4	18	16	16																			
G18	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	34-3/16	84	35	22	19	9	17-7/8	4-1/2	5-3/4	20	19	19																			
920	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	47-1/4	115-3/16	42	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	5-3/4	23-1/2	17-1/2	17-1/2																			
925	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	49-1/2	125-3/16	52-3/4	31-3/8	31-3/8	13-3/16	21-9/16	4-1/2	5-3/4	28-7/8	17-1/2	17-1/2																			

HOT WATER COIL MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION	T ¹ (MPT)	G	GG	H	HH
G10	165.63	2"	8-1/4	52-7/16	24-3/4	49-11/16	51-1/16
G12	320.88	2"	8-1/4	52-7/16	28-3/4	49-11/16	51-1/16
G15	320.88	2"	8-1/4	52-7/16	28-3/4	49-11/16	51-1/16
G18	514.97	1-1/2"	9-1/2	58-3/16	38	55-15/16	57-1/16
920	831.87	2-1/2"	10	61-11/16	45-1/2	58-11/16	60-7/32
925	1230.16	3"	10-1/4	61-5/16	52-1/4	58-7/16	60-7/32

STEAM COIL MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION	PSI	G	GG	H	HH
G10	176.49	2-1/2"	5	8-3/4	51-1/16	16-15/16	51-1/16
G12	328.19	2-1/2"	5	8-3/4	51-1/16	18-3/8	51-1/16
G15	328.19	2-1/2"	5	8-3/4	51-1/16	18-3/8	51-1/16
G18	505.64	2-1/2"	5	10-1/4	57-1/16	23-5/8	57-1/16
920	812.24	2-1/2"	5	10-1/4	60-7/32	28-5/8	60-7/32
925	1234.45	2-1/2"	5	10-1/4	60-7/32	31-3/4	60-7/32

STANDARD EVAPORATIVE COOLING UNIT W/

MODEL	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
G10	520 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH
G12	785 LBS	16"x20"x2" (8)	358 FPM	10	5 GPH
G15	795 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH
G18	985 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH
920	1600 LBS	1575 LBS	572 FPM	24	12 GPH
925	2170 LBS	2165 LBS	638 FPM	30	15 GPH

CELDEK EVAPORATIVE COOLING UNIT W/

MODEL	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
G10	525 LBS	20"x24"x12" (3)	1050 FPM	12	3.9 GPH
G12	780 LBS	25"x32"x12" (8)	900 FPM	20	6.5 GPH
G15	790 LBS	25"x32"x12" (8)	1080 FPM	20	6.5 GPH
G18	975 LBS	30"x36"x12" (8)	1067 FPM	28	8.4 GPH
920	1570 LBS	1545 LBS	1382 FPM	35	10.15 GPH
925	2130 LBS	2125 LBS	1304 FPM	42	12.6 GPH