


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, LPD EVAPORATIVE COOLER AND SCREEN INTAKE

SUNPERCS344
REV#4 01/13/2012

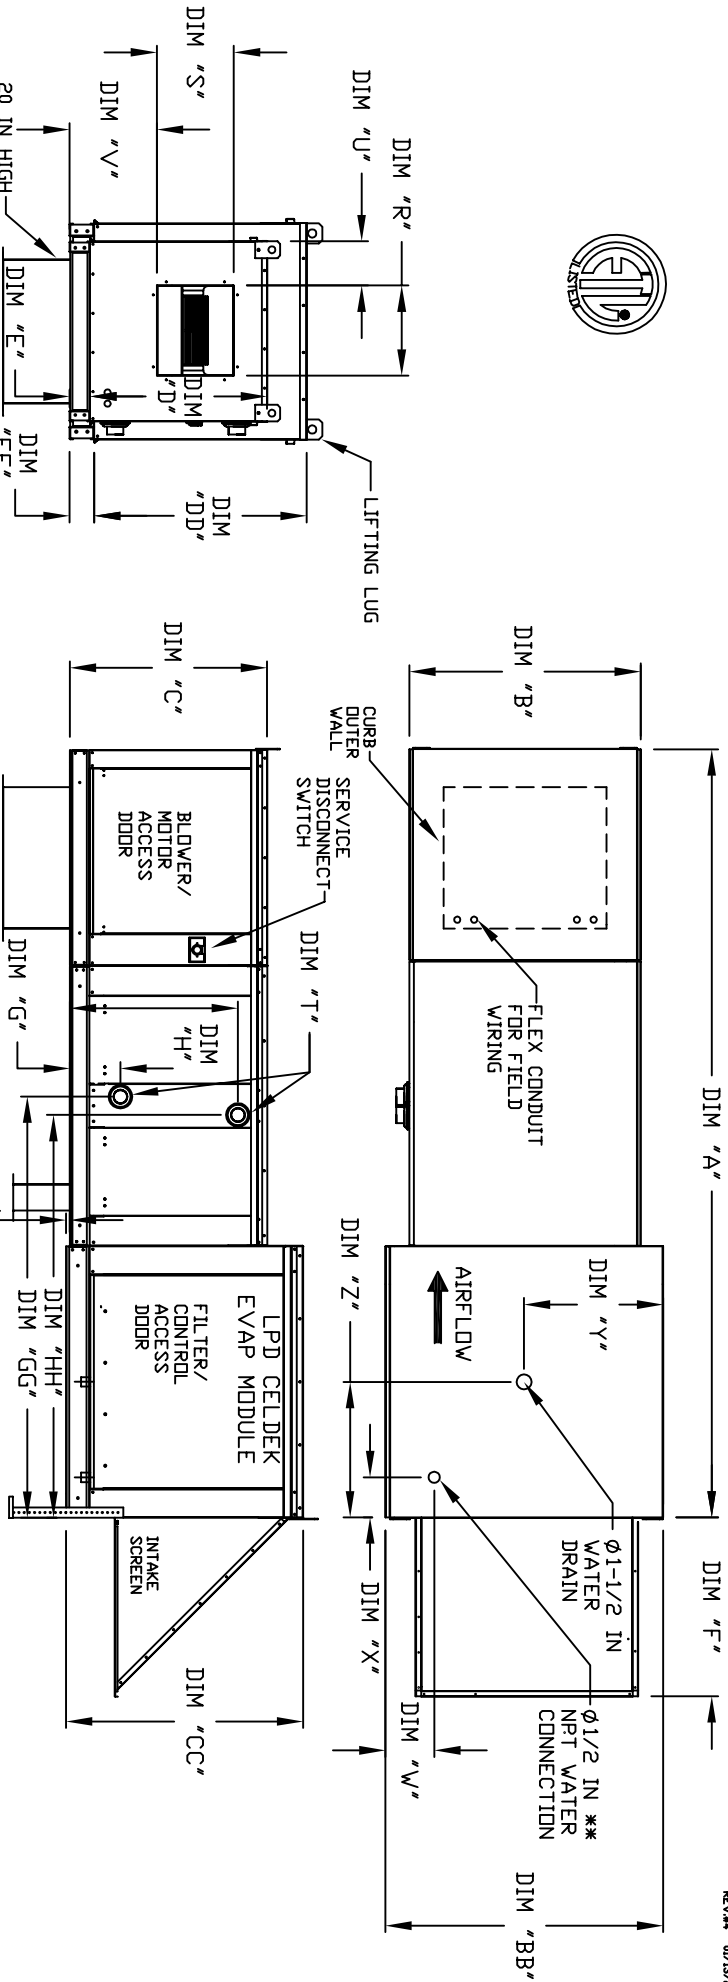

MODEL	UNIT DIMENSIONS											DISCHARGE OPENING											WATER INLET DRAIN OPENING																																																																																												
	A	B	BB	C	CC	D	DD	E	EE	F	J	K	R	S	U	V	W	X	Y	Z	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
G10	106-5/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	430-5/16	21	71	13-1/4	11-1/2	6-3/8	11-7/8	4-1/2	6-1/4	18	15	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95

MODEL	TOTAL CAPACITY		PIPE CONNECTION		STEAM		WATER		INLET DRAIN		OPENING		
	(MBH)	PSI	"T" (MPT)	"T" (MPT)	PSI	G	GG	H	HH	G	GG	H	HH
G10	165.63	2	8-1/4	54-11/16	24-3/4	51-15/16	G10	176.49	2-1/2	8-3/4	53-5/16	16-15/16	53-5/16
G12	320.88	2	8-1/4	60-11/16	28-3/4	57-15/16	G12	328.19	2-1/2	8-3/4	59-5/16	18-3/8	59-5/16
G15	320.88	2	8-1/4	60-11/16	28-3/4	57-15/16	G15	328.19	2-1/2	8-3/4	59-5/16	18-3/8	59-5/16
G18	514.97	2	9-1/2	57-9/16	38	55-5/16	G18	505.64	2-1/2	10-1/4	56-7/16	23-5/8	56-7/16
G20	831.87	2-1/2	10	63-15/16	45-1/2	60-15/16	G20	812.24	2-1/2	10-1/4	62-15/32	28-5/8	62-15/32
G25	1230.16	3	10-1/4	64-3/16	52-1/4	60-11/16	G25	1234.45	2-1/2	10-1/4	62-15/32	31-3/4	62-15/32

MAX. ROOF OPENING 2" SMALLER THEN CURB DUTYSIDE DIMENSION
MAX. MAX. CURB WATER DRAINAGE - 500 GPM @ 70 MPH