


MODULAR INDOOR SIDE DISCHARGE BLOWER WITH V-BANK AND EVAPORATIVE COOLER INTAKE

VERSAM
REV#2 12/1/2016

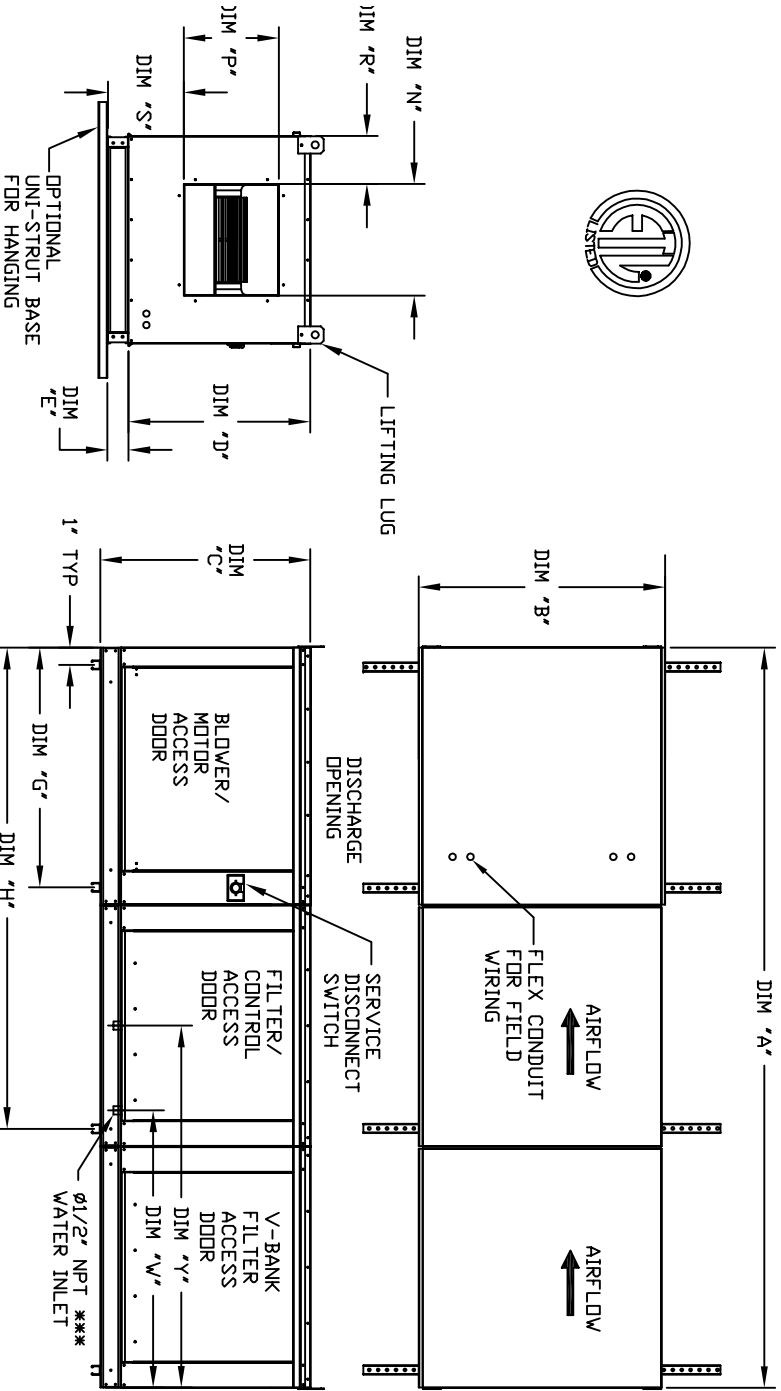

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT SIZE	UNIT DIMENSIONS										INTAKE OPENING										BELT DRIVE DISCHARGE OPENING										DIRECT DRIVE DISCHARGE OPENING										WATER INLET DRAIN OPENING																																																																														
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	N	P	R	S	U	W	X	Y	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	U	W	X	Y																																																																											
1	96-5/8	27-3/8	29-3/4	26-1/16	3-3/4	36	31-1/8	63-1/4	3-1/8	16-3/4	21-7/8	5-3/4	13-1/4	11-1/2	6-3/8	11-7/8	17-1/4	15-1/2	4-3/8	8-15/16	4-1/2	38-1/2	13	48-1/2	104-5/8	37-3/8	36-3/4	33-1/16	3-3/4	48	39-1/8	71-1/4	5-1/8	24-3/4	28-7/8	5-3/4	18-3/4	16	8-5/8	13-1/16	N/A	22	5-5/8	10-1/16	4-1/2	38-1/2	18	48-1/2	121-5/8	41-3/8	43-3/8	38-1/16	5-1/4	60	44-1/8	82-1/4	4-5/8	29-1/4	33-7/8	7-1/2	22	19	9	17-7/8	28	25	6-1/16	14-15/16	4-1/2	44	57-1/2	134-15/16	48-7/16	51-3/8	46-1/8	5-1/4	60	63-3/16	98-7/16	4-5/8	36-1/4	41-7/8	7-1/2	24-7/8	24-7/8	11-1/16	19-1/8	30	30	8-9/16	16-5/8	4-1/2	41-1/8	23-1/2	52-7/8	144-15/16	59-3/16	58-3/8	53-1/8	5-1/4	72	73-3/16	108-7/16	4-5/8	47	48-7/8	7-1/2	31-3/8	31-3/8	13-3/16	21-9/16	35-3/8	35-3/8	11-1/4	19-10/16	4-1/2	41-1/8	28-7/8	52-7/8

UNIT INFORMATION

STANDARD EVAPORATIVE COOLING UNIT

UNIT SIZE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM/INCHES	MAX. FLOW RATE
1	430 LBS	20"x25"x2" (3)	406 FPM	6 GPH
2	665 LBS	16"x20"x2" (8)	358 FPM	10 GPH
3	840 LBS	20"x25"x2" (8)	348 FPM	14 GPH
4	1300 LBS	16"x20"x2" (15)	372 FPM	24 GPH
5	1805 LBS	20"x25"x2" (12)	638 FPM	30 GPH

CELDEK EVAPORATIVE COOLING UNIT

UNIT SIZE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM/INCHES	MAX. FLOW RATE
1	435 LBS	20"x24"x12"	1050 FPM	12 GPH
2	660 LBS	25"x32"x12"	900 FPM	20 GPH
3	830 LBS	30"x36"x12"	1067 FPM	28 GPH
4	1270 LBS	38"x43"x12"	1322 FPM	35 GPH
5	1765 LBS	45"x54"x12"	1304 FPM	42 GPH

V-BANK FILTER

UNIT SIZE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM/INCHES	MAX. FLOW RATE
1	430 LBS	20"x25"x2" (3)	406 FPM	6 GPH
2	665 LBS	16"x20"x2" (8)	358 FPM	10 GPH
3	840 LBS	20"x25"x2" (8)	348 FPM	14 GPH
4	1300 LBS	16"x20"x2" (15)	372 FPM	24 GPH
5	1805 LBS	20"x25"x2" (12)	638 FPM	30 GPH

* DIMENSIONS APPLY TO UNITS WITH G12 BLOWERS ONLY
** MAY VARY FROM FACTORY PRODUCTION - EQ NOT A TR. MFR. F.