


MODULAR OUTDOOR DOWN DISCHARGE BLOWER WITH HEATING COIL, V-BANK FILTER AND SCREEN INTAKE

STV/BCH/DMM
REV# 1/14/08

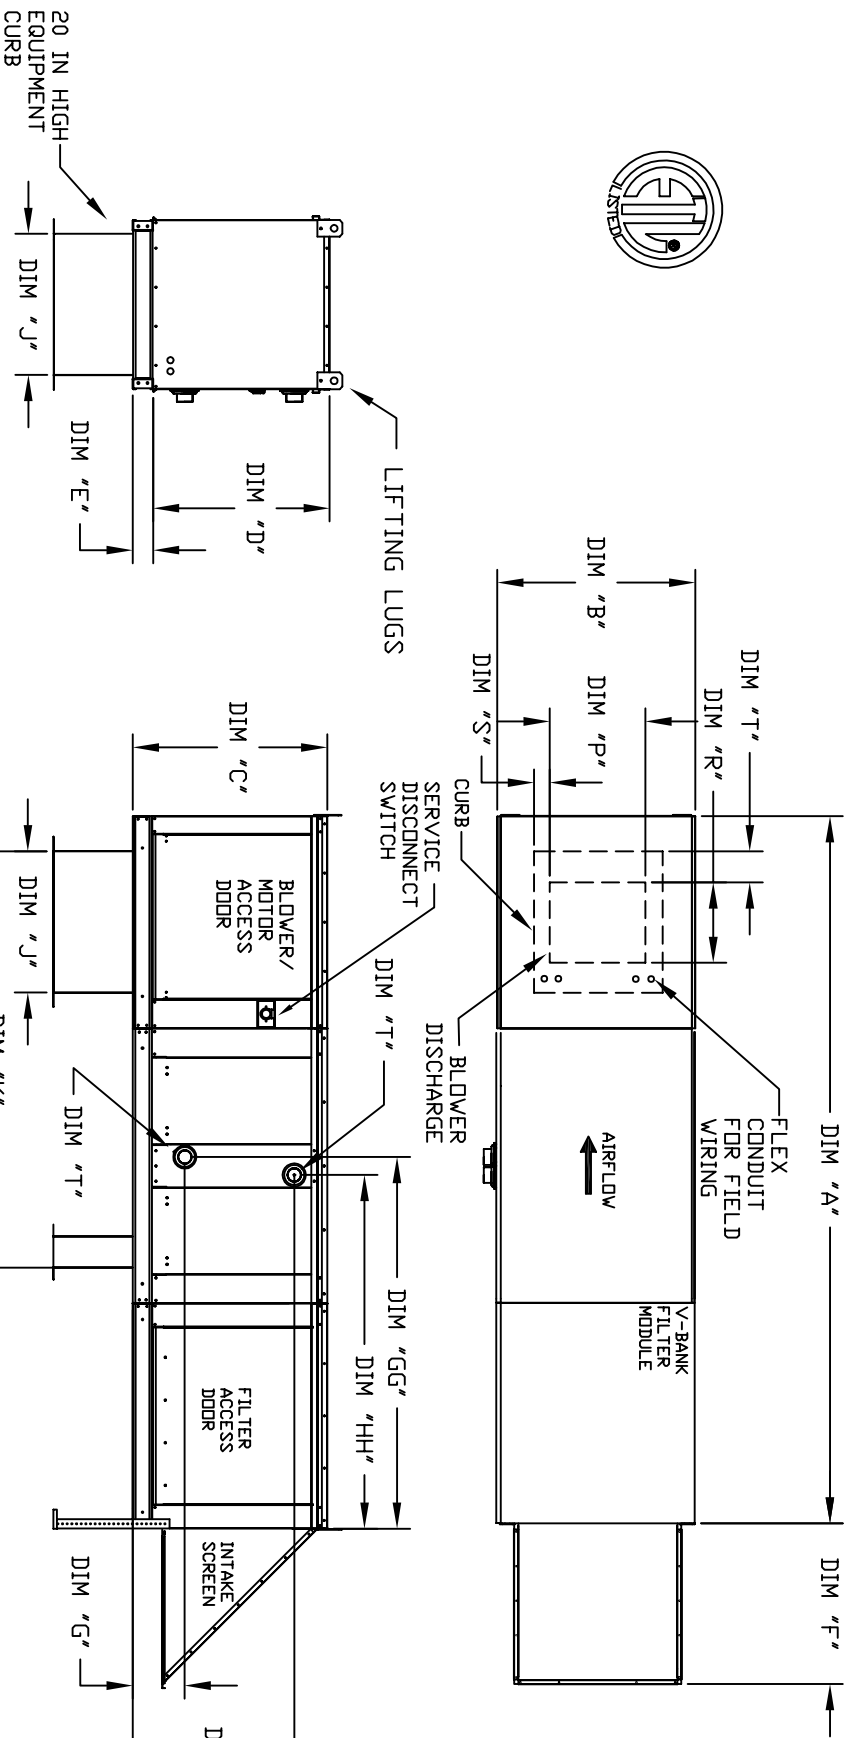

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

| MODEL | UNIT DIMENSIONS | | | | | | | | | | | DISCHARGE OPENING | | | | | | | | | | | V-BANK FILTER | | | | | | | | | | |
|-------|-----------------|---------|--------|---------|-------|---------|--------|-----------|--------|----------|---------|-------------------|----------------------|----------------------|--|--|--|--|--|--|--|--|---------------|--|--|--|--|--|--|--|--|--|--|
| | A | B | C | D | E | F | J | K | P | R | S | T | FILTER SIZE & QTY | MAX. FILTER VELOCITY | | | | | | | | | | | | | | | | | | | |
| G10 | 106-5/8 | 27-3/8 | 29-3/4 | 26-1/16 | 3-3/4 | 22-3/8 | 21 | 65-13/16 | 13-1/4 | 11-1/2 | 3-7/8 | 1-3/4 | 20"x25"x2" (3) | @3500 CFM = 406 FPM | | | | | | | | | | | | | | | | | | | |
| G12 | 114-5/8 | 37-3/8 | 36-3/4 | 33-1/16 | 3-3/4 | 30-5/16 | 31 | 74-5/8 | 15-3/4 | 13-9/16 | 7-5/8 | 7-15/16 | 16"x20"x2" (8) | @5000 CFM = 358 FPM | | | | | | | | | | | | | | | | | | | |
| G15 | 114-5/8 | 37-3/8 | 36-3/4 | 33-1/16 | 3-3/4 | 30-5/16 | 31 | 74-5/8 | 18-3/4 | 16 | 6-1/8 | 5-1/2 | 16"x20"x2" (8) | @6000 CFM = 429 FPM | | | | | | | | | | | | | | | | | | | |
| G18 | 125-5/8 | 41-3/8 | 43-3/8 | 38-1/16 | 5-1/4 | 34-3/16 | 35 | 79-3/16 | 22 | 19 | 6-1/2 | 7 | 20"x25"x2" (8) | @8000 CFM = 348 FPM | | | | | | | | | | | | | | | | | | | |
| 920 | 153-7/8 | 48-7/16 | 51-3/8 | 46-1/8 | 5-1/4 | 47-1/4 | 42 | 104-9/32 | 24-7/8 | 24-7/8 | 8-9/16 | 1-1/8 | 16"x20"x2" (15) | @15000 CFM = 572 FPM | | | | | | | | | | | | | | | | | | | |
| 925 | 153-7/8 | 59-3/16 | 58-3/8 | 53-1/8 | 5-1/4 | 49-1/2 | 52-3/4 | 114-21/32 | 31-3/8 | 10-11/16 | 3-13/16 | 20"x25"x2" (12) | @22000 CFM = 638 FPM | | | | | | | | | | | | | | | | | | | | |

| HOT WATER COIL MODULE | | | | | | | | | | | STEAM COIL MODULE | | | | | | | | | | |
|-----------------------|--------------|----------------------|-----------------|-------|-----------------|----------|--------|----------|-----|------|-------------------|--------------|----------------------|-----------------|----------|----------|----------|----------|----------|----|--|
| MODEL | WEIGHT (LBS) | TOTAL CAPACITY (MBH) | PIPE CONNECTION | TYPE | PIPE CONNECTION | STEAM | G | GG | H | HH | MODEL | WEIGHT (LBS) | TOTAL CAPACITY (MBH) | PIPE CONNECTION | TYPE | STEAM | G | GG | H | HH | |
| G10 | 485 | 165.63 | 2" | (MPT) | 8-1/4 | 54-11/16 | 24-3/4 | 51-15/16 | G10 | 485 | 176.49 | 2-1/2 | 5 | 8-3/4 | 53-5/16 | 16-15/16 | 53-5/16 | 53-5/16 | 53-5/16 | | |
| G12 | 740 | 320.88 | 2" | (MPT) | 8-1/4 | 54-11/16 | 28-3/4 | 51-15/16 | G12 | 740 | 328.19 | 2-1/2 | 5 | 8-3/4 | 53-5/16 | 18-3/8 | 53-5/16 | 53-5/16 | 53-5/16 | | |
| G15 | 750 | 320.88 | 2" | (MPT) | 8-1/4 | 54-11/16 | 28-3/4 | 51-15/16 | G15 | 750 | 328.19 | 2-1/2 | 5 | 8-3/4 | 53-5/16 | 18-3/8 | 53-5/16 | 53-5/16 | 53-5/16 | | |
| G18 | 910 | 514.97 | 1-1/2 | (MPT) | 9-1/2 | 60-7/16 | 38 | 58-3/16 | G18 | 905 | 505.64 | 2-1/2 | 5 | 10-1/4 | 59-5/16 | 23-5/8 | 59-5/16 | 59-5/16 | 59-5/16 | | |
| 920 | 1505 | 831.87 | 2-1/2 | (MPT) | 10 | 63-15/16 | 45-1/2 | 60-5/16 | 920 | 1480 | 812.24 | 2-1/2 | 5 | 10-1/4 | 62-15/32 | 28-5/8 | 62-15/32 | 62-15/32 | 62-15/32 | | |
| 925 | 1505 | 831.87 | 3" | (MPT) | 10-1/4 | 64-3/16 | 52-1/4 | 60-11/16 | 925 | 1480 | 812.24 | 2-1/2 | 5 | 10-1/4 | 62-15/32 | 31-3/4 | 62-15/32 | 62-15/32 | 62-15/32 | | |