


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH V-BANK, HEATING COIL, LPD EVAPORATIVE COOLER AND SCREEN INTAKE

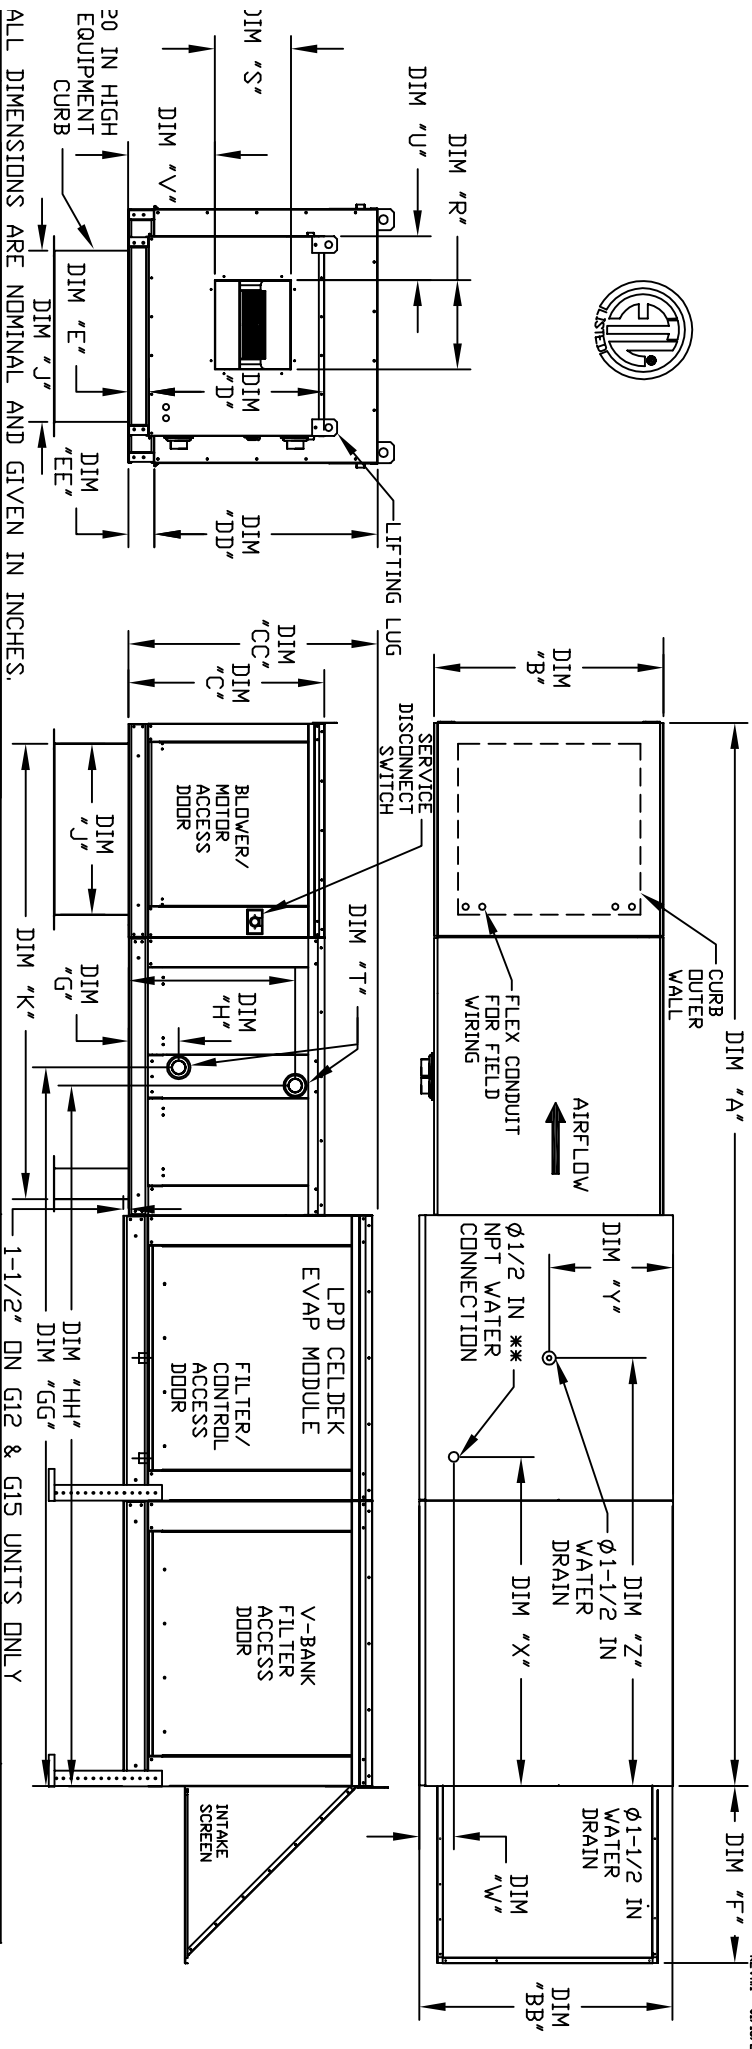

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	A	B	BB	C	CC	D	DD	E	EE	F	J	K	R	S	U	V	W	X	Y	Z
G10	138-7/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	43-5/16	21	71	13-1/4	11-1/2	6-3/8	11-7/8	4-1/2	38-1/2	18	48-1/4
G12	158-7/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	34-3/16	31	79	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	44	20	57-1/4
G15	158-7/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	5-1/4	34-3/16	31	79	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	44	20	57-1/4
G18	158-1/8	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	47-1/4	35	84	18-3/4	16	8-5/8	14-1/16	4-1/2	44	20	57-1/4
G20	189-1/4	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	49-5/8	42	115-3/16	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	41-1/8	23-1/2	52-7/8
G25	199-1/4	59-3/16	74-7/8	58-3/8	58-3/8	53-1/8	53-1/8	5-1/4	5-1/4	49-5/8	42	115-3/16	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	41-1/8	23-1/2	52-7/8

HOT WATER COIL MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION 'T' (MPT)	G	GG	H	HH	MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION 'T' (MPT)	PSI	G	GG	H	HH
G10	165.63	2	8-1/4	86-15/16	24-3/4	84-3/16	G10	176.49	2-1/2	5	8-3/4	85-9/16	16-15/16	85-9/16
G12	320.88	2	8-1/4	98-15/16	28-3/4	96-3/16	G12	328.19	2-1/2	5	8-3/4	97-9/16	18-3/8	97-9/16
G15	320.88	2	8-1/4	98-15/16	28-3/4	96-3/16	G15	328.19	2-1/2	5	8-3/4	97-9/16	18-3/8	97-9/16
G18	514.97	1-1/2	9-1/2	92-15/16	38	90-11/16	G18	505.64	2-1/2	5	10-1/4	91-13/16	23-5/8	91-13/16
G20	831.87	2-1/2	10	99-5/16	45-1/2	96-5/16	G20	812.24	2-1/2	5	10-1/4	97-7/8	28-5/8	97-7/8
G25	1230.16	3	10-1/4	99-9/16	52-1/4	96-1/16	G25	1234.45	2-1/2	5	10-1/4	97-7/8	31-3/4	97-7/8

STEAM COIL MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION 'T' (MPT)	STEAM	MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION 'T' (MPT)	STEAM
G10	176.49	2-1/2	5	G10	176.49	2-1/2	5
G12	328.19	2-1/2	5	G12	328.19	2-1/2	5
G15	328.19	2-1/2	5	G15	328.19	2-1/2	5
G18	505.64	2-1/2	5	G18	505.64	2-1/2	5
G20	812.24	2-1/2	5	G20	812.24	2-1/2	5
G25	1234.45	2-1/2	5	G25	1234.45	2-1/2	5

MODEL	CELDEK EVAPORATIVE COOLING UNIT W/					V-BANK						
	MODEL	TOT. WEIGHT	STEAM	TOT. WEIGHT	MAX. FLOW RATE	MODEL	FILTER SIZE & QTY	STEAM	WATER INLET	DRAIN OPENING		
G10	HOT	740 LBS	740 LBS	25'x32'x12'	20	6.5 GPH	16'x20'x2' (8)	5	8-3/4	85-9/16	16-15/16	85-9/16
G12	WATER	1055 LBS	1055 LBS	30'x36'x12'	28	8.4 GPH	20'x25'x2' (8)	5	8-3/4	97-9/16	18-3/8	97-9/16
G15	COIL	1065 LBS	1065 LBS	30'x36'x12'	28	8.4 GPH	20'x25'x2' (8)	5	8-3/4	97-9/16	18-3/8	97-9/16
G18	MODUL F	1440 LBS	1435 LBS	38'x43'x12'	35	10.15 GPH	16'x20'x2' (15)	5	10-1/4	91-13/16	23-5/8	91-13/16
G20	MODUL F	2055 LBS	2030 LBS	45'x54'x12'	42	12.6 GPH	20'x25'x2' (12)	5	10-1/4	97-7/8	28-5/8	97-7/8
G25	MODUL F	2650 LBS	2645 LBS	45'x72'x12'	57	20.1 GPH	20'x25'x2' (12)	5	10-1/4	97-7/8	31-3/4	97-7/8

MAX. ROOF OPENING 2' SMALLER THEN CURB OUTSIDE DIMENSION
 MAX. MAX. FLVAD VATED DDFRSTIDDF - EN DDT a 7n nrc. C