


MODULAR OUTDOOR DOWN DISCHARGE BLOWER WITH HEATING COIL, V-BANK FILTER AND SCREEN INTAKE

STVBR004H
REV#3 12/1/2016

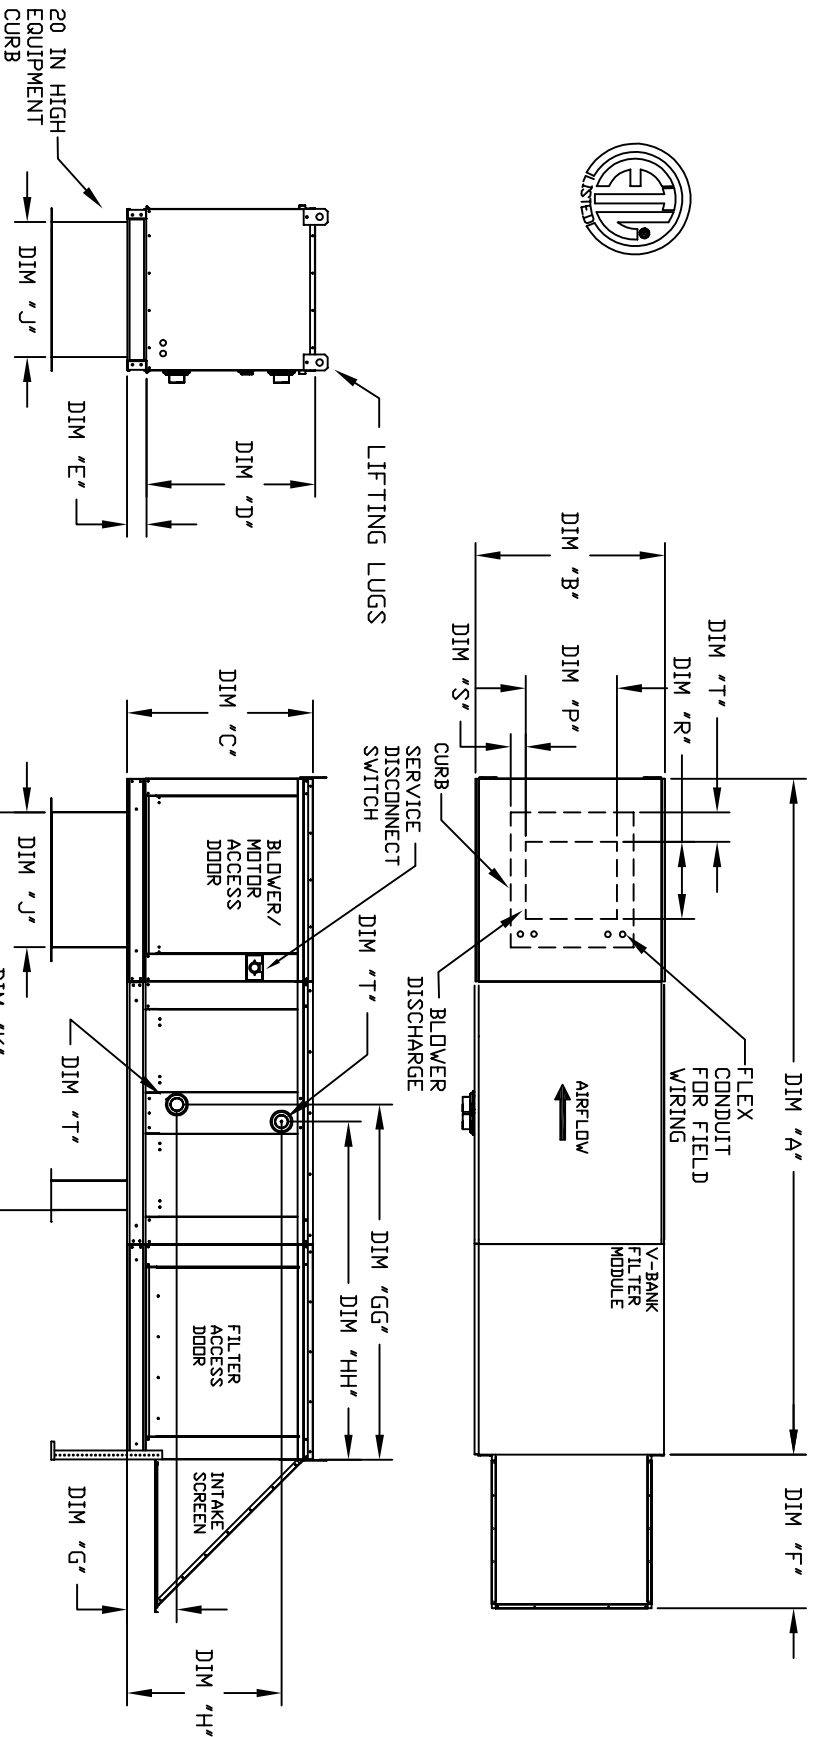

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THEN CURB OUTSIDE DIMENSION

UNIT SIZE	UNIT DIMENSIONS										DISCHARGE OPENING				V-BANK FILTER				
	A	B	C	D	E	F	J	K	P	R	S	T	FILTER SIZE & QTY	MAX. FILTER VELOCITY	PSI	G	GG	H	HH
1	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	22-3/8	21	65-13/16	13-1/4	11-1/2	3-7/8	1-3/4	20"x25"x2" (3)	@3500 CFM = 406 FPM	5	8-3/4	53-5/16	16-15/16	53-5/16
2**	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	31	74-5/8	15-3/4	13-9/16	7-5/8	7-15/16	16"x20"x2" (8)	@5000 CFM = 358 FPM	5	8-3/4	53-5/16	18-3/8	53-5/16
2	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	31	74-5/8	18-3/4	16-1/8	5-1/2	7	16"x20"x2" (8)	@6000 CFM = 429 FPM	5	8-3/4	53-5/16	18-3/8	53-5/16
3	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	34-3/16	35	79-3/16	22	6-1/2	6-1/2	7	20"x25"x2" (8)	@8000 CFM = 348 FPM	5	10-1/4	59-5/16	23-5/8	59-5/16
4	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	47-1/4	42	104-9/32	24-7/8	8-9/16	1-1/8	1-1/8	16"x20"x2" (15)	@15000 CFM = 572 FPM	5	10-1/4	62-15/32	28-5/8	62-15/32
5	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	49-1/2	52	114-21/32	31-3/8	10-11/16	3-13/16	20"x25"x2" (12)	@22000 CFM = 638 FPM	5	10-1/4	62-15/32	31-3/4	62-15/32	

HOT WATER COIL MODULE

STEAM COIL MODULE

UNIT SIZE	WEIGHT (LBS)	TOTAL CAPACITY		PIPE CONNECTION		G	GG	H	HH	UNIT SIZE	WEIGHT (LBS)	TOTAL CAPACITY		PIPE CONNECTION		G	GG	H	HH
		(MBH)	(MPT)	"T"	(MPT)							(MBH)	(MPT)	"T"	(MPT)				
1	485	165.63	2	8-1/4	54-11/16	24-3/4	45-15/16	1	485	176.49	2-1/2	8-3/4	53-5/16	16-15/16	53-5/16				
2**	740	320.88	2	8-1/4	54-11/16	28-3/4	51-15/16	2**	740	328.19	2-1/2	8-3/4	53-5/16	18-3/8	53-5/16				
2	750	320.88	2	8-1/4	54-11/16	28-3/4	45-15/16	2	750	328.19	2-1/2	8-3/4	53-5/16	18-3/8	53-5/16				
3	910	514.97	2	9-1/2	60-7/16	38	58-3/16	3	905	505.64	2-1/2	10-1/4	59-5/16	23-5/8	59-5/16				
4	1505	831.87	2-1/2	10	63-15/16	45-1/2	60-5/16	4	1480	812.24	2-1/2	10-1/4	62-15/32	28-5/8	62-15/32				
5	2060	1230.16	3	10-1/4	64-3/16	52-1/4	60-11/16	5	2055	1234.45	2-1/2	10-1/4	62-15/32	31-3/4	62-15/32				

ETI DIMENSIONS ADD V TO INITIAL WIDTH FOR DIMENSIONS