


MODULAR INDOOR DOWN DISCHARGE BLOWER WITH COOLING COIL AND V-BANK FILTER

REV A3 06/15/2011

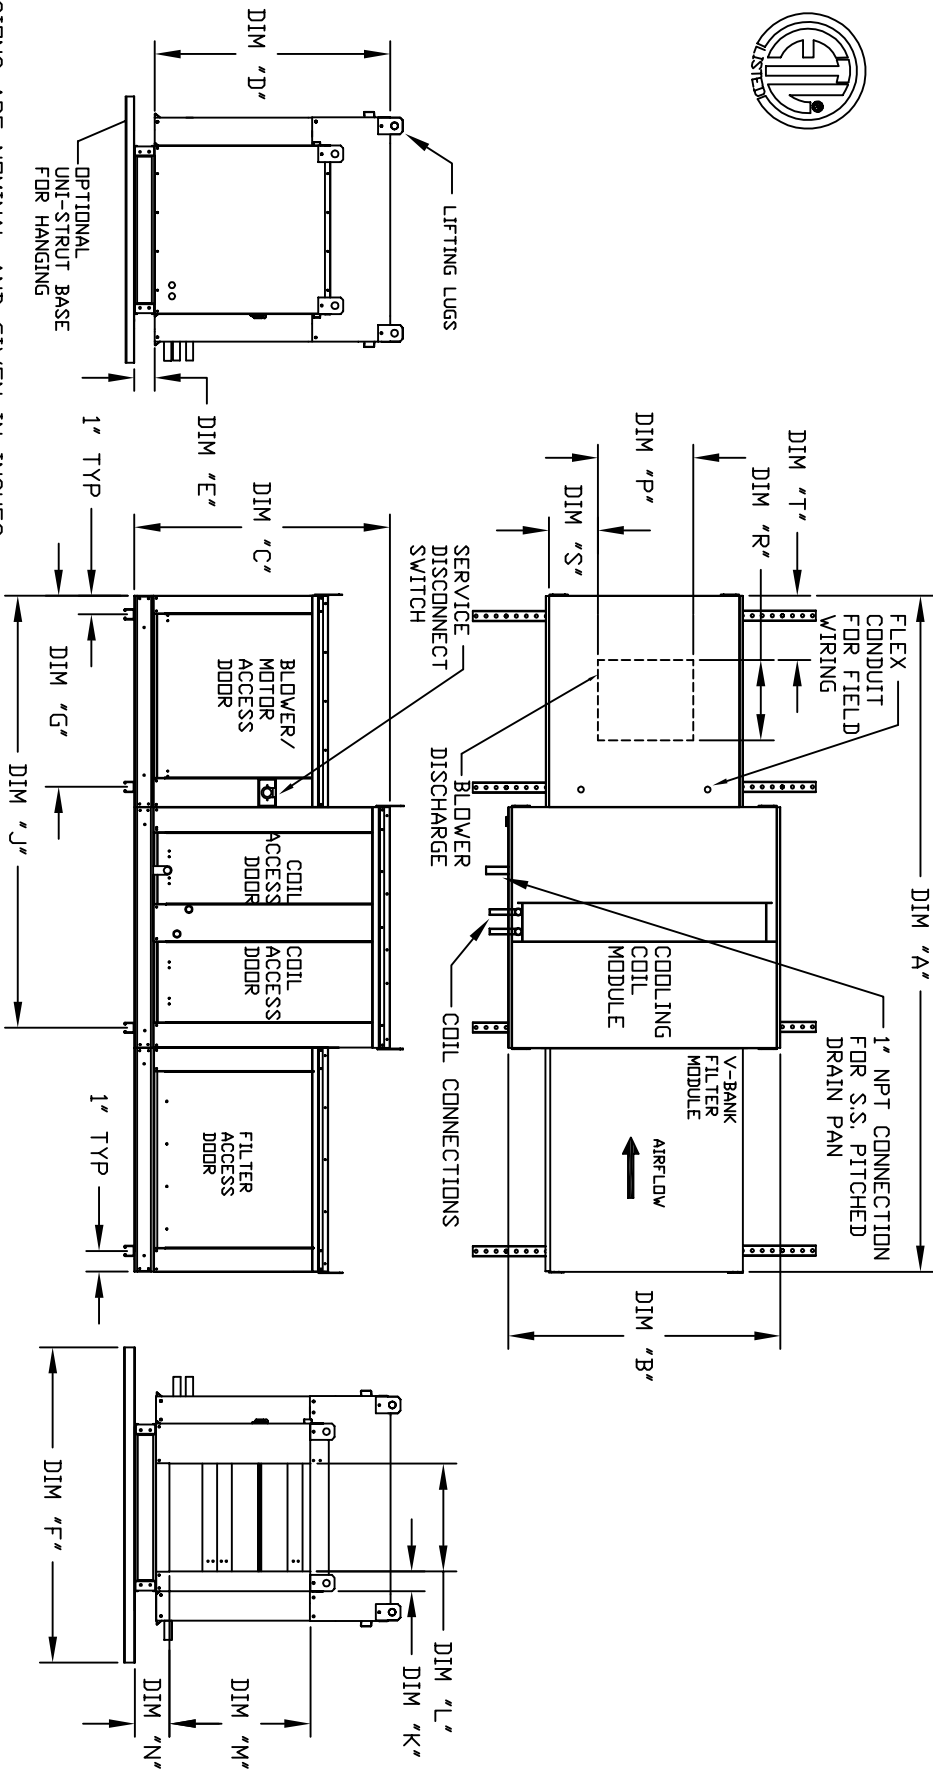

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	WEIGHT	UNIT DIMENSIONS										INTAKE OPENING					DISCHARGE OPENING					TONNAGE RANGE	
		A	B	C	D	E	F	G	J	K	L	M	N	P	R	S	T	MIN	MAX				
G10	655 LBS	106-5/8	39-3/8	42-3/4	39	3-3/4	48	31-1/8	73-1/4	3-1/8	16-3/4	21-7/8	5-3/4	13-1/4	11-1/2	6-3/8	7-1/4	3	12.5	20			
G12	915 LBS	114-5/8	49-3/8	47-3/4	44	3-3/4	60	39-1/8	81-1/4	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	12-1/2	5	20	20			
G15	925 LBS	114-5/8	49-3/8	47-3/4	44	3-3/4	60	39-1/8	81-1/4	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	12-1/2	5	20	20			
G18	1105 LBS	125-5/8	54-3/8	56-3/8	51-1/8	5-1/4	72	44-1/8	86-1/4	4-5/8	29-1/4	33-7/8	7-1/2	22	19	9	12	10	25	25			
920	1750 LBS	153-7/8	60-7/16	64-3/8	59-1/8	5-1/4	72	63-3/16	117-3/8	4-5/8	36-1/4	41-7/8	7-1/2	24-7/8	24-7/8	11-1/16	12-1/4	20	40	40			
925	2305 LBS	163-7/8	79-7/16	68-7/16	63-3/16	5-1/4	96	73-3/16	127-3/8	4-5/8	47	48-7/8	7-1/2	31-3/8	31-3/8	13-3/16	14-1/2	30	50	50			

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY
G10	20"x25"x2" (3)	@3500 CFM = 406 FPM
G12	16"x20"x2" (8)	@5000 CFM = 358 FPM
G15	16"x20"x2" (8)	@6000 CFM = 429 FPM
G18	20"x25"x2" (8)	@8000 CFM = 348 FPM
920	16"x20"x2" (15)	@15000 CFM = 572 FPM
925	20"x25"x2" (12)	@22000 CFM = 638 FPM