


MODULAR INDOOR DOWN DISCHARGE BLOWER WITH V-BANK, HEATING COIL AND EVAPORATIVE COOLER INTAKE

REV. 01 06/15/2015

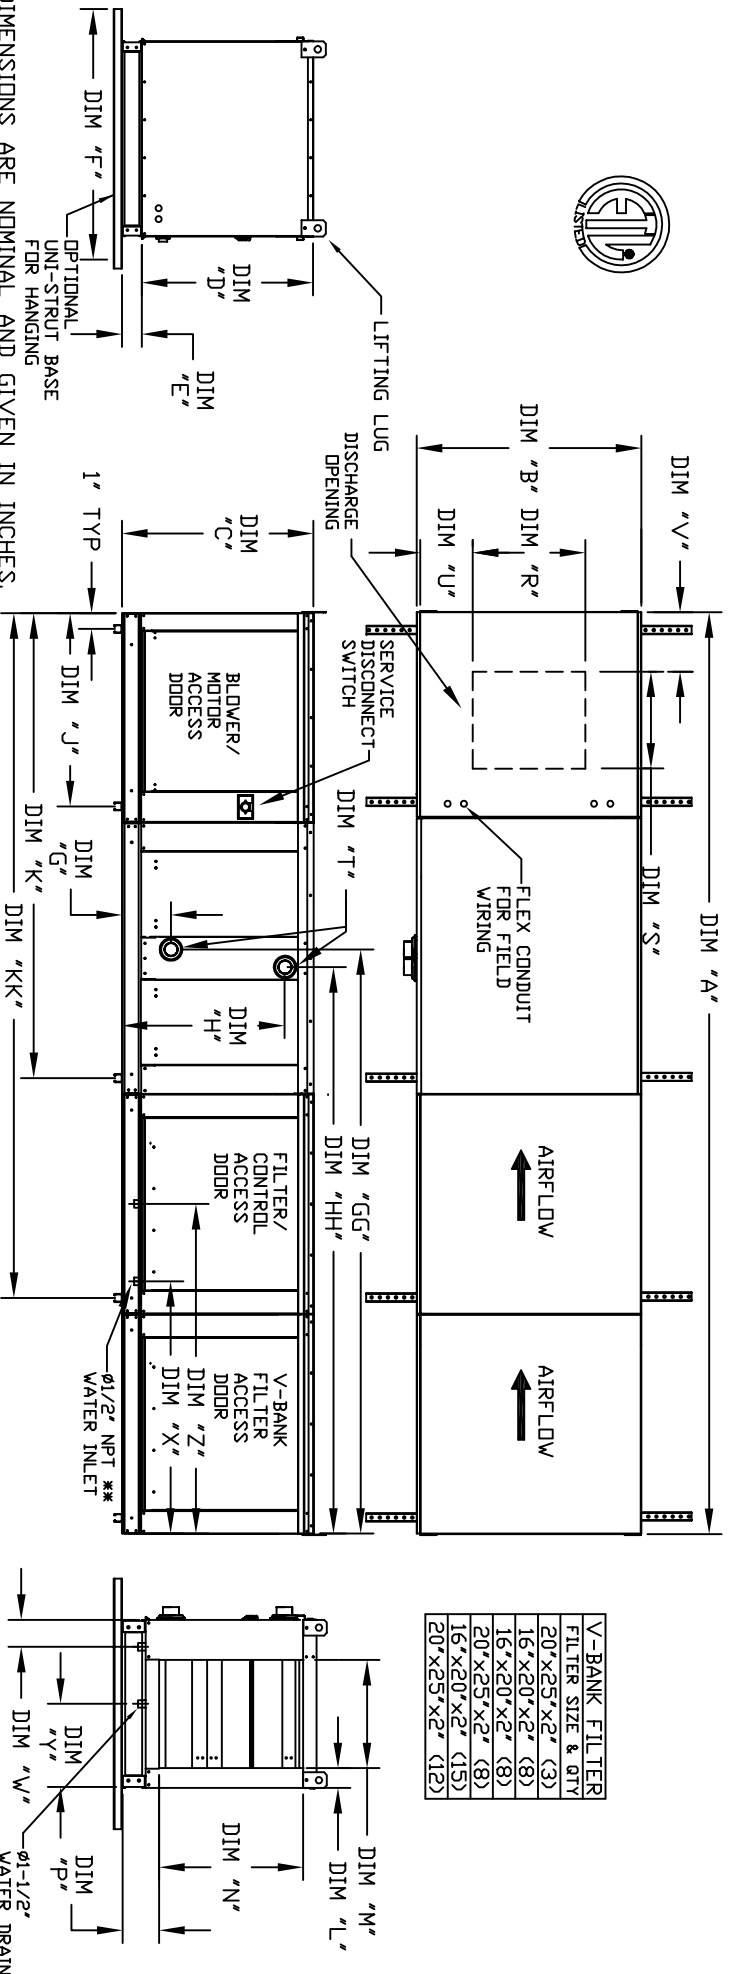

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS	A	B	C	D	E	F	J	K	KK	L	M	N	P	R	S	U	V	W	X	Y	Z
G10	138-7/8	27-3/8	29-3/4	26-1/16	163-3/4	36	31-1/8	73-1/4	105-3/8	3-1/8	16-3/4	21-7/8	5-3/4	13 1/4	11-1/2	6-3/8	7-1/4	4-1/2	38-1/2	13	48-1/4	
G12	146-7/8	37-3/8	36-3/4	33-1/16	163-3/4	48	39-1/8	81-1/4	113-3/8	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	12-1/2	4-1/2	38-1/2	18	48-1/4	
G15	146-7/8	37-3/8	36-3/4	33-1/16	163-3/4	48	39-1/8	81-1/4	113-3/8	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	12-1/2	4-1/2	38-1/2	18	48-1/4	
G18	163-7/8	41-3/8	43-3/8	38-1/16	165-1/4	60	44-1/8	86-1/4	124-3/8	4-5/8	29-1/4	33-7/8	7-1/2	22	19	9	12	4-1/2	44	20	57-1/4	
920	189-1/4	48-7/16	51-3/8	46-1/8	5-1/4	60	63-3/16	117-3/8	152-5/8	4-5/8	36-1/4	41-7/8	7-1/2	24-7/8	24-7/8	11-1/16	12-1/4	4-1/2	41-1/8	23-1/2	52-7/8	
925	199-1/4	59-3/16	58-3/8	53-1/8	5-1/4	72	73-3/16	127-3/8	162-5/8	4-5/8	47	48-7/8	7-1/2	31-3/8	31-3/8	13-3/16	14-1/2	4-1/2	41-1/8	28-7/8	52-7/8	

HOT WATER MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION (MPT)	G	GG	H	HH	MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION (MPT)	STEAM	G	GG	H	HH
G10	165.63	2	8-1/4	84-11/16	24-3/4	81-15/16	G10	176.49	2-1/2	5	8-3/4	83-5/16	16-15/16	83-5/16
G12	320.88	2	8-1/4	84-11/16	28-3/4	81-15/16	G12	328.19	2-1/2	5	8-3/4	83-5/16	18-3/8	83-5/16
G15	320.88	2	8-1/4	84-11/16	28-3/4	81-15/16	G15	328.19	2-1/2	5	8-3/4	83-5/16	18-3/8	83-5/16
G18	514.97	1-1/2	9-1/2	96-7/16	38	94-3/16	G18	505.64	2-1/2	5	10-1/4	95-5/16	23-5/8	95-5/16
920	831.87	2-1/2	10	97-1/16	45-1/2	94-1/16	920	812.24	2-1/2	5	10-1/4	95-5/8	28-5/8	95-5/8
925	1230.16	3	10-1/4	96-11/16	52-1/4	93-11/16	925	1234.45	2-1/2	5	10-1/4	95-5/8	31-3/4	95-5/8

STEAM COIL MODULE

MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION (MPT)	STEAM	G	GG	H	HH
G10	176.49	2-1/2	5	8-3/4	83-5/16	16-15/16	83-5/16
G12	328.19	2-1/2	5	8-3/4	83-5/16	18-3/8	83-5/16
G15	328.19	2-1/2	5	8-3/4	83-5/16	18-3/8	83-5/16
G18	505.64	2-1/2	5	10-1/4	95-5/16	23-5/8	95-5/16
920	812.24	2-1/2	5	10-1/4	95-5/8	28-5/8	95-5/8
925	1234.45	2-1/2	5	10-1/4	95-5/8	31-3/4	95-5/8

STANDARD EVAPORATIVE COOLING UNIT W/

CELDEX EVAPORATIVE COOLING UNIT W/

MODEL	TOT. WEIGHT	TOT. WEIGHT MEDIA SIZE & QTY VEL. @ MAX. CFMIN/NOZZLES	MAX. FLOW RATE	MODEL	TOT. WEIGHT	TOT. WEIGHT MEDIA SIZE & QTY VEL. @ MAX. CFMIN/NOZZLES	MAX. FLOW RATE
HOT WATER COIL MODULE	590 LBS	20"x25"x2" (3)	406 FPM	HOT WATER COIL MODULE	595 LBS	20"x24"x12"	1050 FPM
G10	885 LBS	16"x20"x2" (8)	358 FPM	G10	880 LBS	25"x32"x12"	900 FPM
G12	895 LBS	16"x20"x2" (8)	429 FPM	G12	890 LBS	25"x32"x12"	1067 FPM
G15	895 LBS	16"x20"x2" (8)	429 FPM	G15	890 LBS	30"x36"x12"	1067 FPM
G18	1100 LBS	1710 LBS	572 FPM	G18	1090 LBS	38"x43"x12"	1322 FPM
920	1735 LBS	2325 LBS	638 FPM	920	1705 LBS	45"x54"x12"	1304 FPM
925	2330 LBS	30	15 GPH	925	2290 LBS	42	12.6 GPH