


MODULAR INDOOR INLINE BLOWER WITH V-BANK, HEATING COIL AND EVAPORATIVE COOLER INTAKE

REV. 06/15/2015

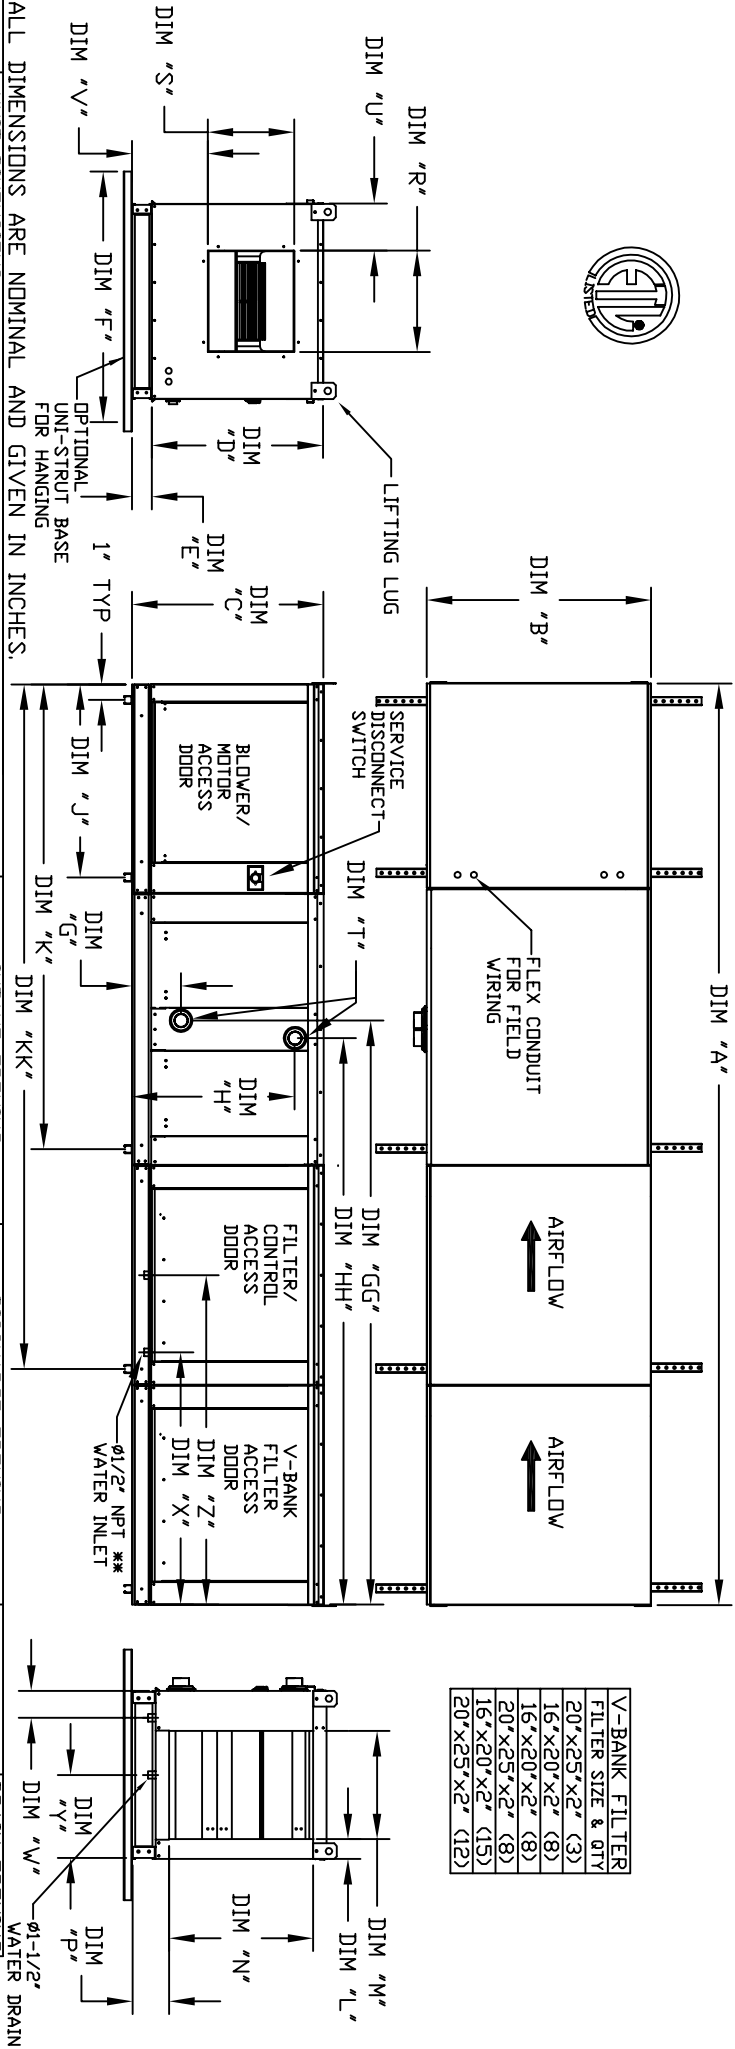

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS	INTAKE OPENING													DISCHARGE OPENING												
A	B	C	D	E	F	J	K	KK	L	M	N	P	R	S	U	V	W	X	Y	Z							
G10	138-7/8	27-3/8	29-3/4	26-1/16	33-3/4	36	31-1/8	73-1/4	105-3/8	3-1/8	16-3/4	21-7/8	5-3/4	13	1/4	11-1/2	6-3/8	11-7/8	4-1/2	38-1/2	13	48-1/4					
G12	146-7/8	37-3/8	36-3/4	33-1/16	33-3/4	48	39-1/8	81-1/4	113-3/8	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	38-1/2	18	48-1/4						
G15	146-7/8	37-3/8	36-3/4	33-1/16	33-3/4	48	39-1/8	81-1/4	113-3/8	5-1/8	24-3/4	28-7/8	5-3/4	15-3/4	13-9/16	10-1/8	13-1/16	4-1/2	38-1/2	18	48-1/4						
G18	163-7/8	41-3/8	43-3/8	38-1/16	38-1/16	60	44-1/8	86-1/4	124-3/8	4-5/8	29-1/4	33-7/8	7-1/2	22	19	9	17-7/8	4-1/2	44	20	57-1/4						
G20	189-1/4	48-7/16	51-3/8	46-1/8	51-1/4	60	63-3/16	117-3/8	152-5/8	4-5/8	36-1/4	41-7/8	7-1/2	24-7/8	24-7/8	11-1/16	19-1/8	4-1/2	41-1/8	23-1/2	52-7/8						
G25	199-1/4	59-3/16	58-3/8	53-1/8	51-1/4	72	73-3/16	127-3/8	162-5/8	4-5/8	48-7/8	7-1/2	31-3/8	31-3/8	13-3/16	21-9/16	4-1/2	41-1/8	28-7/8	52-7/8							

HOT WATER MODULE		STEAM COIL MODULE		STANDARD EVAPORATIVE COOLING UNIT W/		CELDEX EVAPORATIVE COOLING UNIT W/	
MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION	STEAM	MODEL	TOTAL CAPACITY (MBH)	PIPE CONNECTION	STEAM
G10	16563	2	8-1/4	84-11/16	24-3/4	81-15/16	5
G12	32088	2	8-1/4	84-11/16	28-3/4	81-15/16	5
G15	32088	2	8-1/4	84-11/16	28-3/4	81-15/16	5
G18	51497	1-1/2	9-1/2	96-7/16	38	94-3/16	5
G20	83187	2-1/2	10	97-1/16	45-1/2	94-1/16	5
G25	123016	3	10-1/4	96-11/16	52-1/4	93-11/16	5

HOT WATER MODULE		STEAM COIL MODULE		STANDARD EVAPORATIVE COOLING UNIT W/		CELDEX EVAPORATIVE COOLING UNIT W/	
MODEL	TOT. WEIGHT (LBS)	STEAM COIL	STEAM	MODEL	TOT. WEIGHT (LBS)	STEAM	STEAM
G10	590	885	595	G10	595	880	595
G12	885	895	880	G12	880	890	880
G15	895	895	890	G15	890	890	890
G18	1100	1095	1090	G18	1090	1085	1085
G20	1735	1710	1705	G20	1705	1680	1680
G25	2330	2325	2290	G25	2290	2285	2285

** MAY VARY BASED ON FACTOR OF SAFETY - SEE DAT A 70 HERE C