


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER WITH EVAPORATIVE COOLER AND INTAKE HOOD

REV#3 10/13/2010

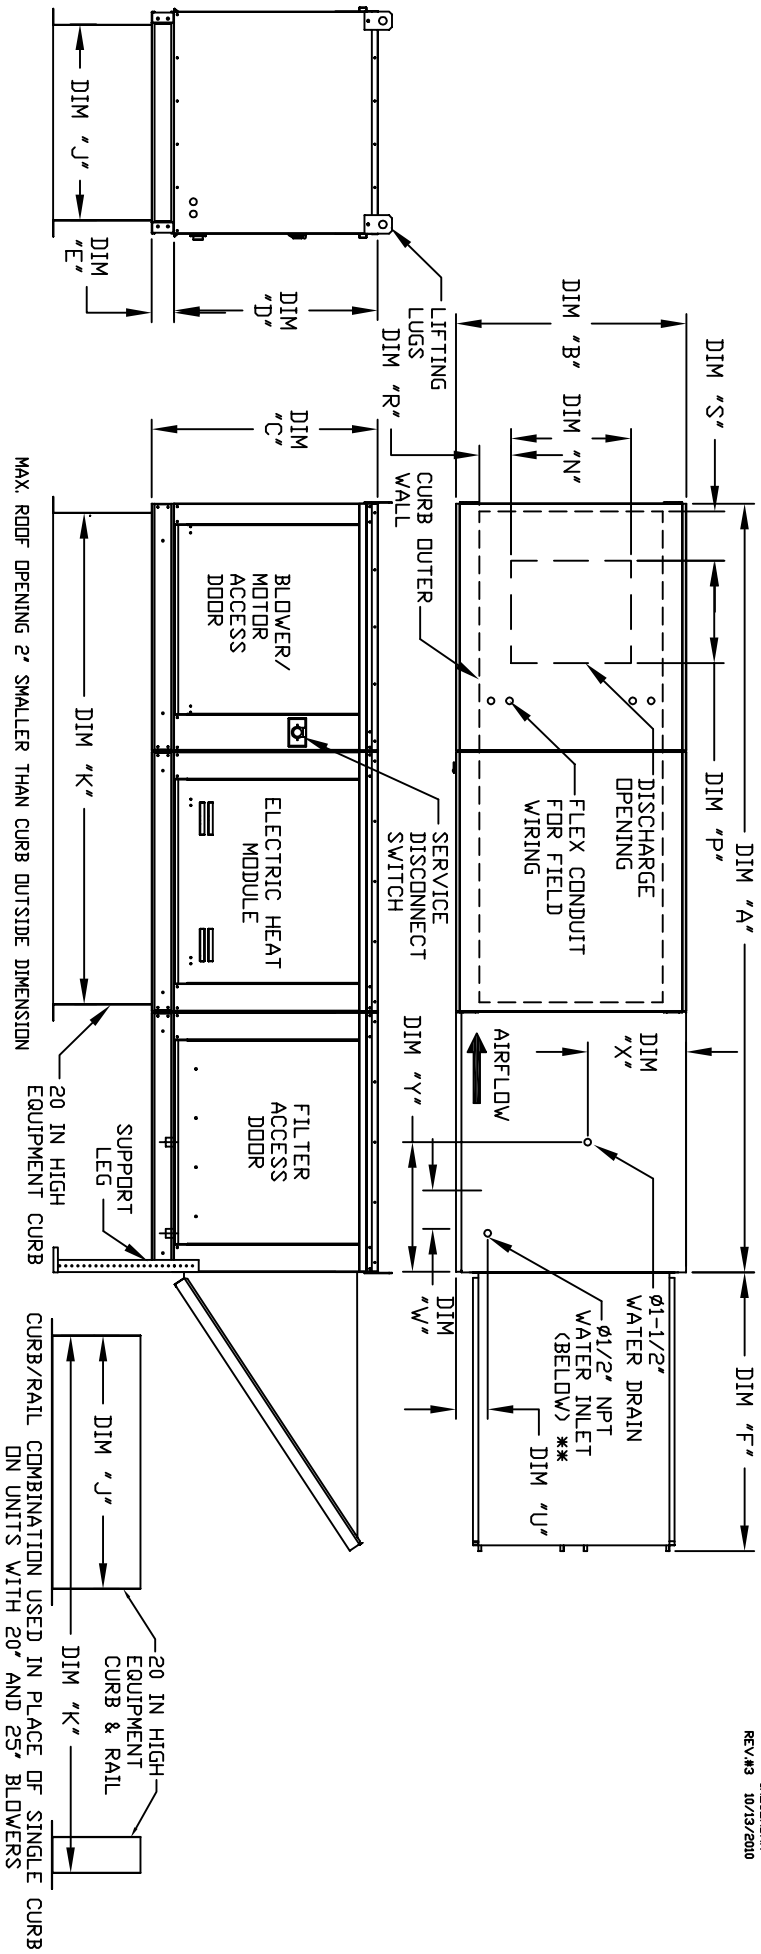

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	A	B	C	D	E	F	J	K	N	P	R	S	U	W	X	Y
E1-G10	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	71	13-1/4	11-1/2	3-7/8	5-9/16	4-1/2	6-1/4	13	16
E2-G15	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	18-3/4	16	6-1/8	8-5/16	4-1/2	6-1/4	18	16
E3-G18	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	84	22	19	6-1/2	10-5/16	4-1/2	5-3/4	20	19
E4-920	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	115-3/16	24-7/8	24-7/8	8-9/16	10-5/8	4-1/2	5-3/4	23-1/2	17-1/2
E5-925	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52-3/4	125-3/16	31-3/8	31-3/8	10-11/16	12-7/8	4-1/2	5-3/4	28-7/8	17-1/2

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY
G10	16"x20"x2" (3)	@3600 CFM = 686 FPM
G15	20"x25"x2" (3)	@6500 CFM = 754 FPM
G18	16"x20"x2" (6)	@8000 CFM = 762 FPM
920	16"x20"x2" (10)	@13000 CFM = 743 FPM
925	20"x25"x2" (8)	@22000 CFM = 956 FPM

STANDARD EVAPORATIVE COOLING UNIT

TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM(INCH)ZLES	MAX. FLOW RATE
680 LBS	20"x25"x2" (3)	406 FPM	6 GPH
985 LBS	16"x20"x2" (8)	429 FPM	10 GPH
1215 LBS	20"x25"x2" (8)	348 FPM	14 GPH
1985 LBS	16"x20"x2" (15)	572 FPM	24 GPH
2575 LBS	20"x25"x2" (12)	638 FPM	30 GPH

CELDEK EVAPORATIVE COOLING UNIT

TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM(INCH)ZLES	MAX. FLOW RATE
685 LBS	20"x24"x12" (3)	1050 FPM	12 GPH
980 LBS	25"x32"x12" (8)	1080 FPM	20 GPH
1205 LBS	30"x36"x12" (12)	1067 FPM	28 GPH
1955 LBS	38"x43"x12" (18)	1322 FPM	35 GPH
2535 LBS	45"x54"x12" (24)	1304 FPM	42 GPH