


MODULAR OUTDOOR SIDE DISCHARGE ELECTRIC HEATER PACKAGED UNIT WITH COOLING AND INTAKE HOOD

JHS5AAC-40U
REV.#7 06/15/2015

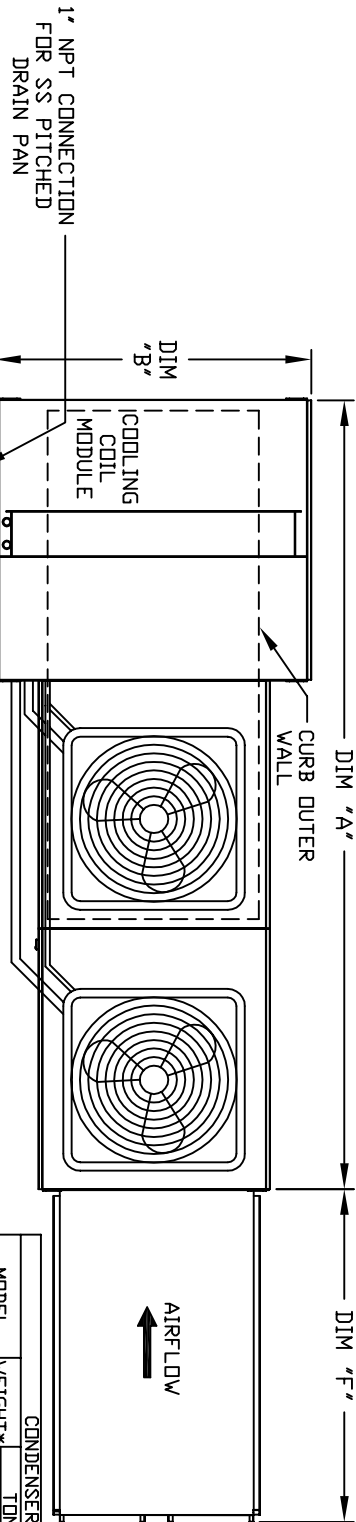

1" NPT CONNECTION FOR SS PITCHED DRAIN PAN


LIFTING LUGS

48 IN CLEARANCE REQUIRED ABOVE CONDENSERS

AIRFLOW


CONDENSER INFORMATION

MODEL	WEIGHT*	#1 TONNAGE	#2 TONNAGE	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	2.5 TON	32-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	5 TON	33-5/16	71-11/16	68
10 TON-G15	394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-G20	394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

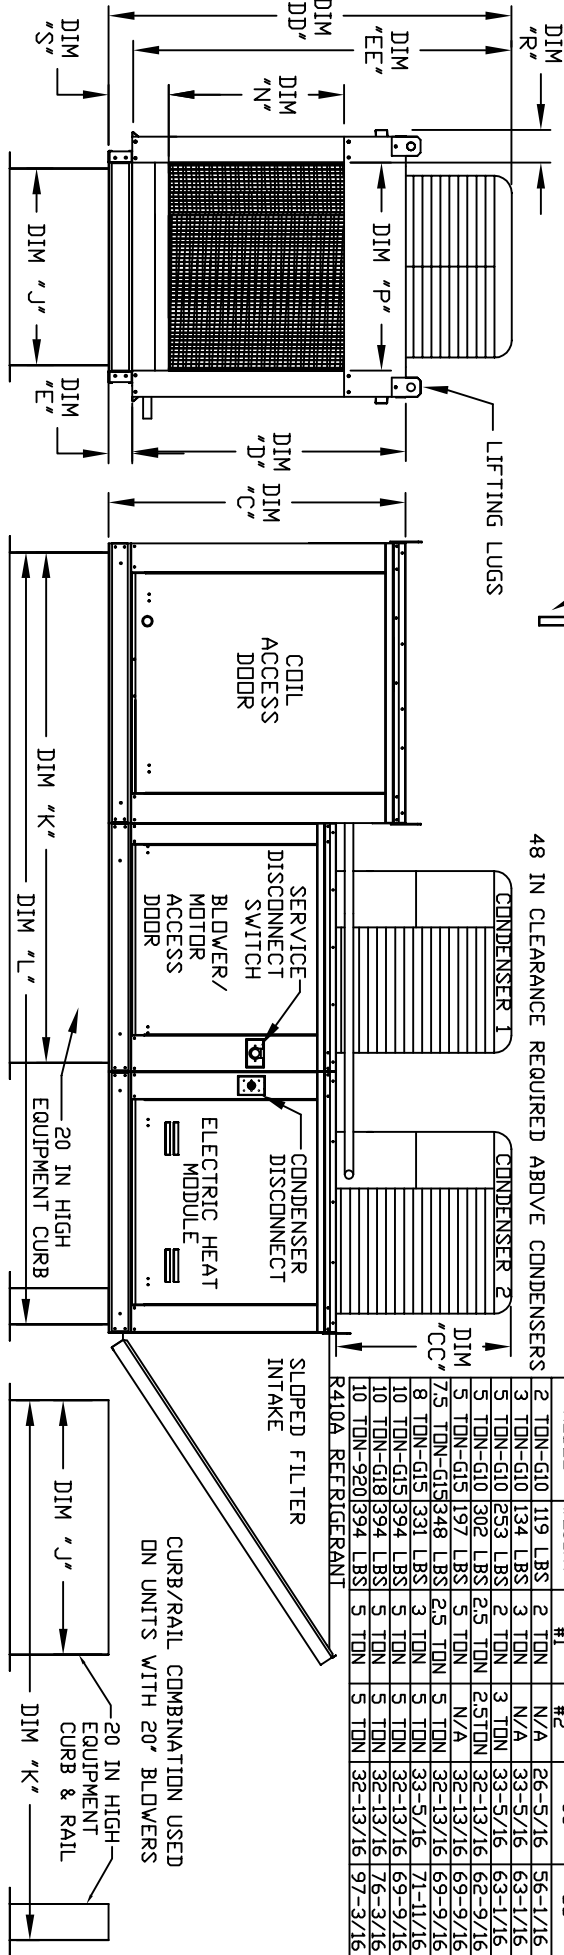

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION



MODEL	WEIGHT	UNIT DIMENSIONS										CURB/RAIL					DISCHARGE OPENING				
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S			
E1-G10	905 LBS	116-5/8	39-3/8	42-3/4	39	3-3/4	44-3/8	31	71	113-1/4	17-1/2	16	11	5-3/4							
E2-G15	1235 LBS	124-5/8	49-3/8	47-3/4	44	3-3/4	53-5/8	31	79	121-1/4	29-3/4	22-3/4	12-5/8	5-3/4							
E3-G18	1480 LBS	129-5/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	126-1/4	29-5/8	30	11-1/2	7-3/8							
E4-920	2435 LBS	172-13/16	64-3/8	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	169-7/16	36-3/4	34	12-1/2	7-3/8							

UNIT INFORMATION:

MODEL	TONNAGE RANGE		FILTER SIZE & QTY	MAX. FILTER VELOCITY
	MIN	MAX		
E1-G10	2 Ton	5 Ton	16"x20"x2" (3)	@3600 CFM = 686 FPM
E2-G15	5 Ton	10 Ton	20"x25"x2" (3)	@5500 CFM = 754 FPM
E3-G18	10 Ton	10 Ton	16"x20"x2" (6)	@8000 CFM = 762 FPM
E4-920	10 Ton	10 Ton	16"x20"x2" (10)	@13000 CFM = 743 FPM

WITH CURB/RAIL/UNIT WEIGHT THE WEIGHT THE TANK ARRIVE