


MODULAR OUTDOOR SIDE DISCHARGE ELECTRIC HEATER WITH V-BANK AND INTAKE HOOD

REV.#1 1/28/2008

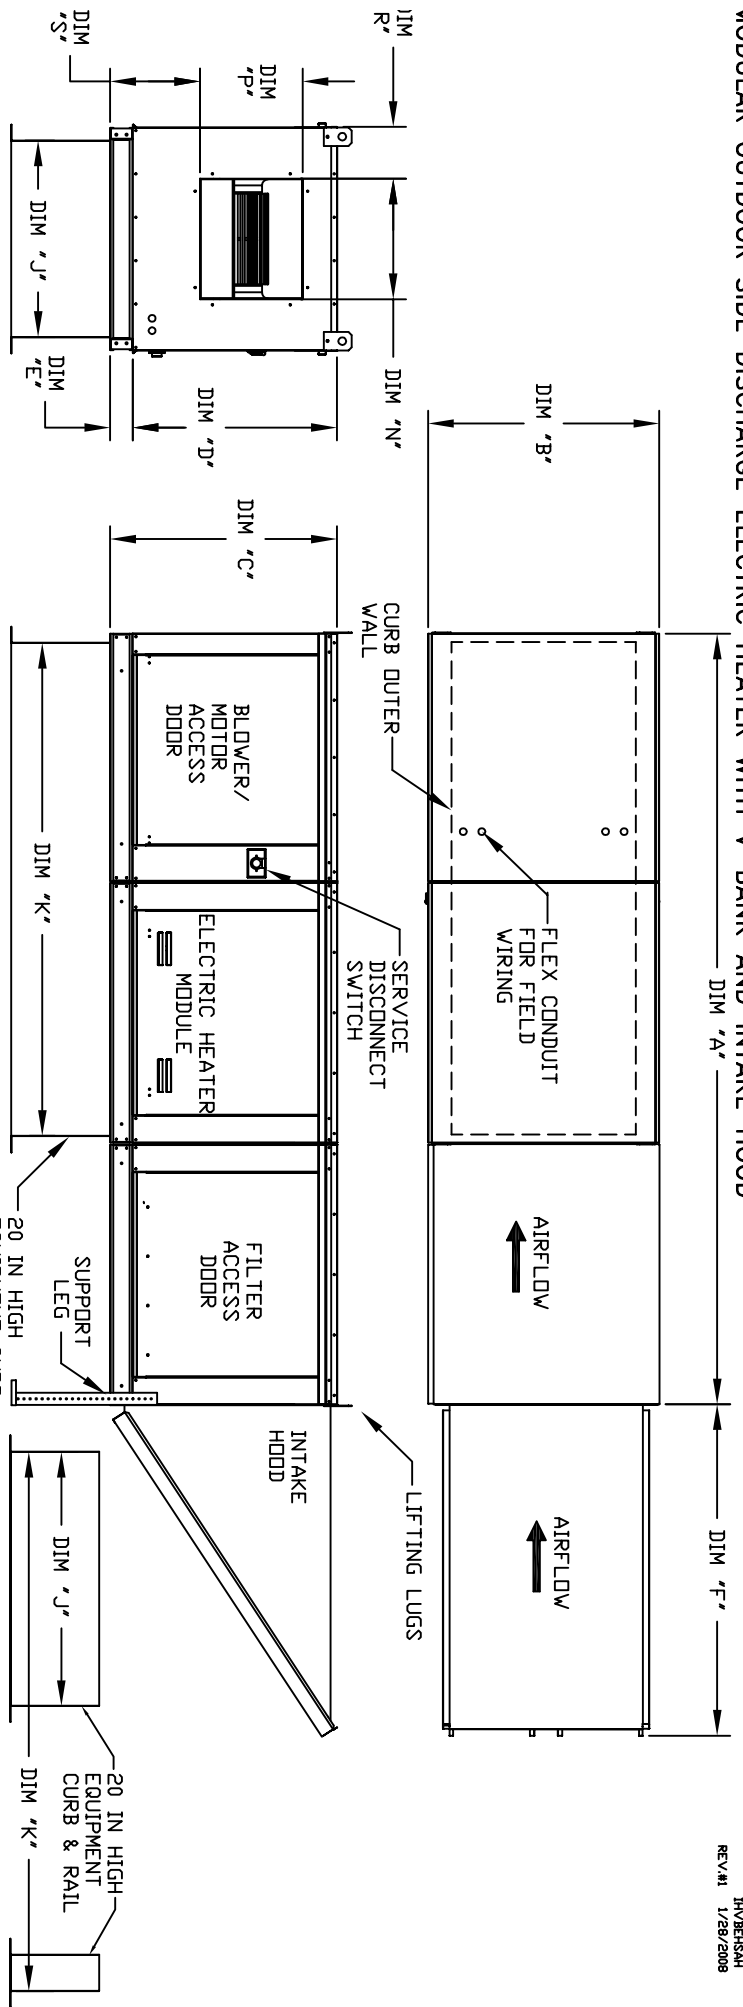

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

MODEL	WEIGHT	UNIT DIMENSIONS												CURB			DISCHARGE OPENING				
		A	B	C	D	E	F	J	K	N	P	R	S	20 IN HIGH EQUIPMENT CURB	20 IN HIGH EQUIPMENT CURB & RAIL	25" BLOWERS					
E1-G10	645 LBS	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	44-3/8	21	71	13-1/4	11-1/2	6-3/8	11-7/8								
E2-G15	940 LBS	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	53-5/8	31	79	18-3/4	16	8-5/8	14-1/16								
E3-G18	1140 LBS	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	51-5/8	35	84	22	19	9	17-7/8								
E4-920	1890 LBS	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	76-3/8	42	115-3/16	24-7/8	24-7/8	11-1/16	19-1/8								
E5-925	2465 LBS	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	71-3/8	52-3/4	125-3/16	31-3/8	31-3/8	13-3/16	21-9/16								

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY
E1-G10	20"x25"x2" (3)	@3600 CFM = 418 FPM
E2-G15	16"x20"x2" (8)	@6500 CFM = 464 FPM
E3-G18	20"x25"x2" (8)	@8000 CFM = 348 FPM
E4-920	16"x20"x2" (15)	@13000 CFM = 495 FPM
E5-925	20"x25"x2" (12)	@22000 CFM = 638 FPM